

XML format for RBA models

S. Fischer, V. Fromion, A. Goelzer

August 16, 2017

Contents

1	Introduction	3
2	Conventions	3
2.1	Naming conventions	3
2.2	Boolean attributes	3
3	metabolism.xml	3
3.1	RBAMetabolism container	3
3.1.1	RBAMetabolism	3
3.1.2	Compartment	4
3.1.3	Species	4
4	parameters.xml	5
4.1	RBAMetabolism container	5
4.1.1	RBAMetabolism	5
4.1.2	Compartment	5
4.1.3	Species	6

1 Introduction

In this document we present the XML structures used to define a RBA model. A complete RBA model is composed of the following files:

- metabolism.xml (definition of compartments, metabolic species and metabolic reactions).
- parameters.xml (definition of density constraints and user-defined functions).
- proteins.xml (definition of proteins).
- rnas.xml (definition of RNAs).
- dna.xml (definition of DNA).
- enzymes.xml (definition of enzymatic machineries catalyzing metabolic reactions).
- processes.xml (definition of cell processes necessary to growth and maintenance).

For every file, we present the nodes that composes the XML structure. For every node, we show a class diagram that shows the node's attributes and the children node that it may/must contain. We provide a brief description about the relevance of the node in the RBA model.

2 Conventions

2.1 Naming conventions

2.2 Boolean attributes

3 metabolism.xml

3.1 RBAMetabolism container

The metabolism file is strongly inspired by SBML. More precisely, it is a subpart of an SBML file.

3.1.1 RBAMetabolism

The outermost portion of the metabolism file is an instance of class **RBAMetabolism**, shown in Figure 2.

Currently, **RBAMetabolism** has no simple attributes. It includes exactly one instance of **ListOf** container classes. All **ListOf** classes do not have own attributes, they are merely used to organize a list of instances from another class. This organization was inspired by SBML.

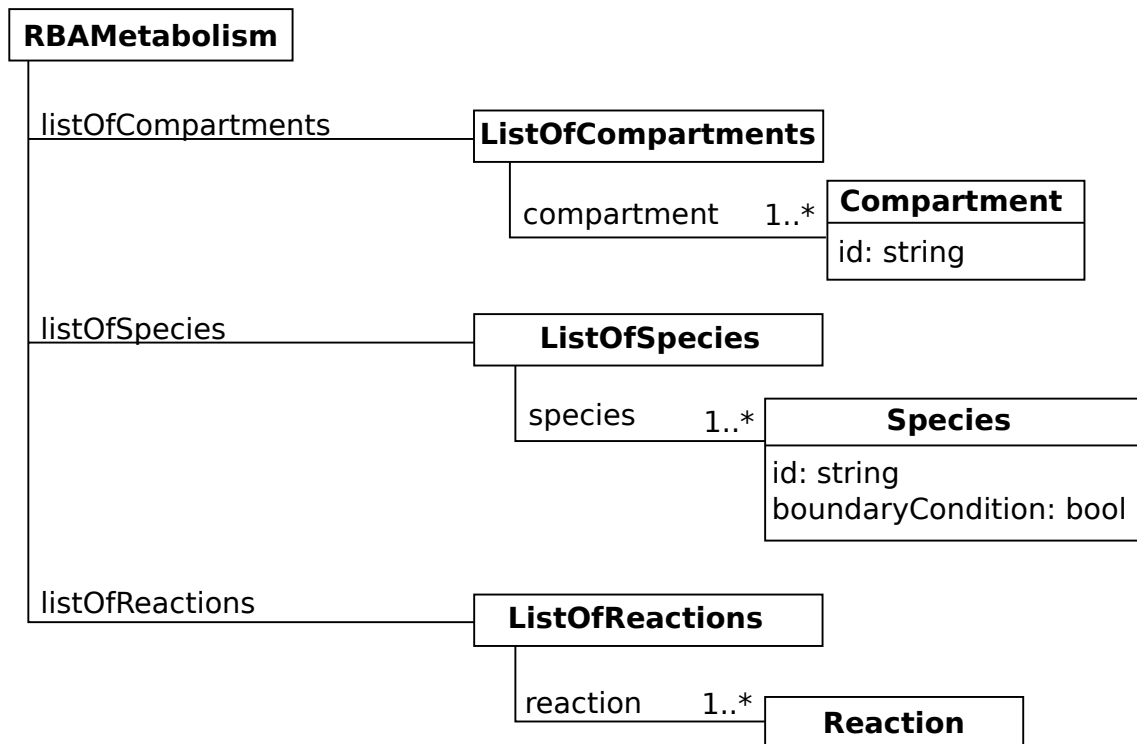


Figure 1: XML structure of metabolism document.

3.1.2 Compartment

The **Compartment** class is used to list existing cell compartments.

The *id* attribute The **id** attribute is a string defining the identifier of a compartment.

3.1.3 Species

The **Species** class is used to list *metabolic* species.

The *id* attribute The **id** attribute is a string defining the identifier of a metabolite.

The *boundaryCondition* attribute The **boundaryCondition** attribute is a boolean. If the attribute is set to true, the metabolite is considered to be at a constant concentration. In other words, it is not affected by reactions. This is typical for metabolites in the external medium.

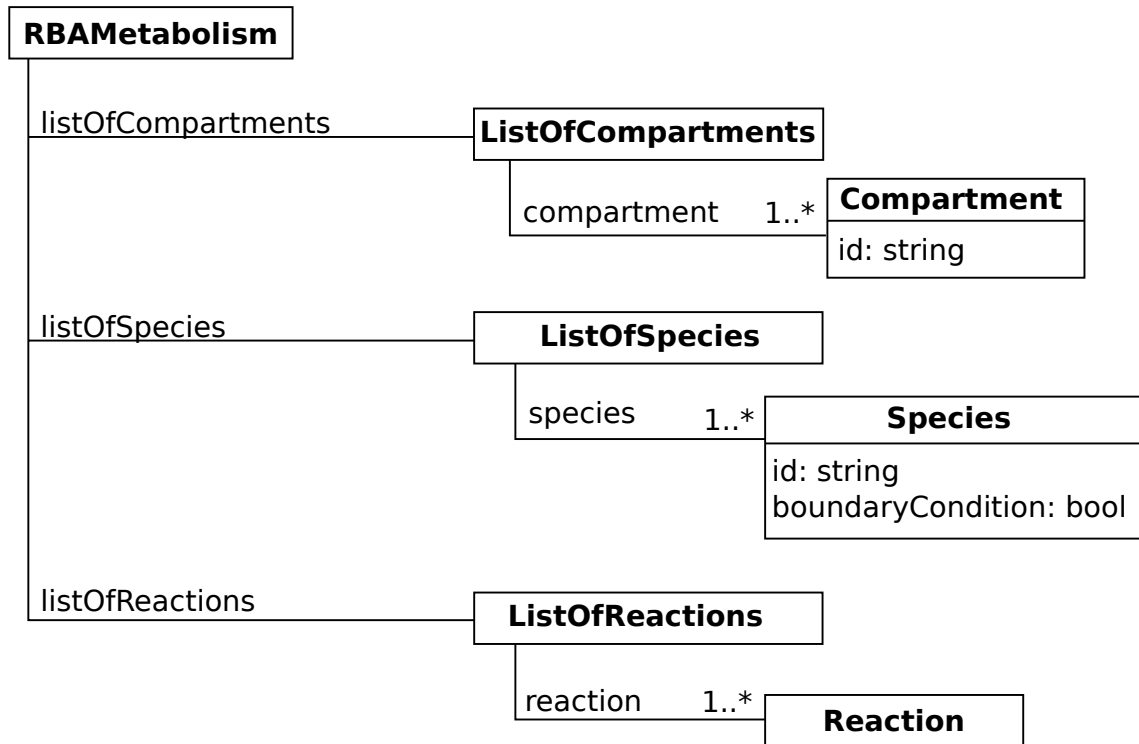


Figure 2: XML structure of metabolism document.

4 parameters.xml

4.1 RBAMetabolism container

The metabolism file is strongly inspired by SBML. More precisely, it is a subpart of an SBML file.

4.1.1 RBAMetabolism

The outermost portion of the metabolism file is an instance of class **RBAMetabolism**, shown in Figure 2.

Currently, **RBAMetabolism** has no simple attributes. It includes exactly one instance of **ListOf** container classes. All **ListOf** classes do not have own attributes, they are merely used to organize a list of instances from another class. This organization was inspired by SBML.

4.1.2 Compartment

The **Compartment** class is used to list existing cell compartments.

The *id* attribute The *id* attribute is a string defining the identifier of a compartment.

4.1.3 Species

The **Species** class is used to list *metabolic* species.

The *id* attribute The **id** attribute is a string defining the identifier of a metabolite.

The *boundaryCondition* attribute The **boundaryCondition** attribute is a boolean. If the attribute is set to true, the metabolite is considered to be at a constant concentration. In other words, it is not affected by reactions. This is typical for metabolites in the external medium.