6.6.6 colour code [[7,1,3]], 3 rounds, 10 ions

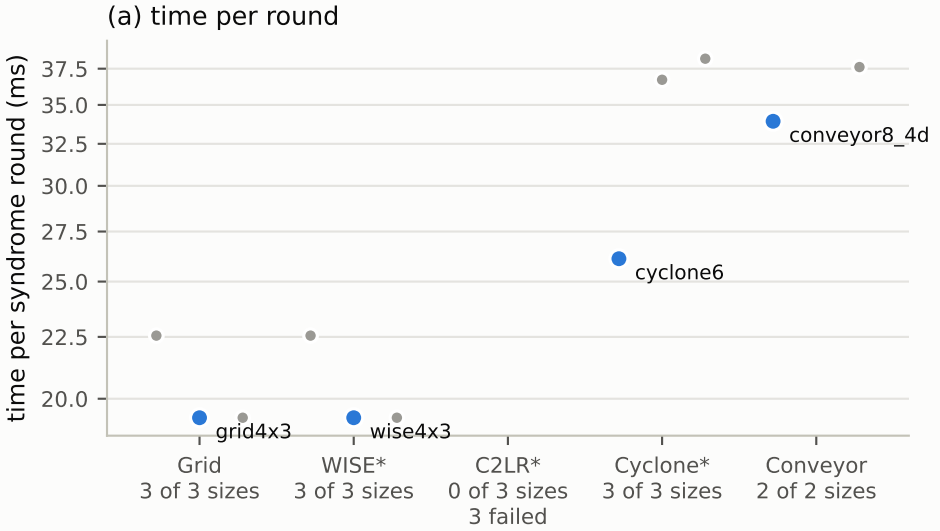

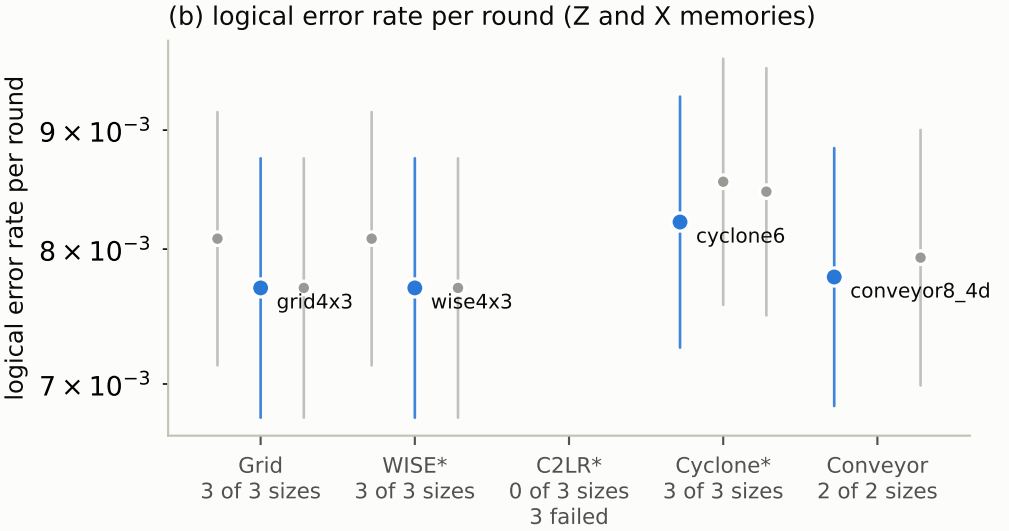

* WISE: same program and time as Grid until WISE's broadcast rules exist
* C2LR: the reference compiler moves ions by plain shuttles, which a swap-or-stay device does not offer (R4, C1): every size fails until a C2LR router exists
* Cyclone: compiled without rigid rotation (qccdc has no Cyclone scheduler yet): an upper bound
failed: the compiler refused the size, or its program broke a rule (results/<code>.jsonl says which)