


assignment2

The guide

1. Create a new RStudio Project.

Open RStudio → New Project → New Directory → New Project Name the project assignment2 and create it Create a new Quarto file example.qmd with basic content, then knit it to HTML

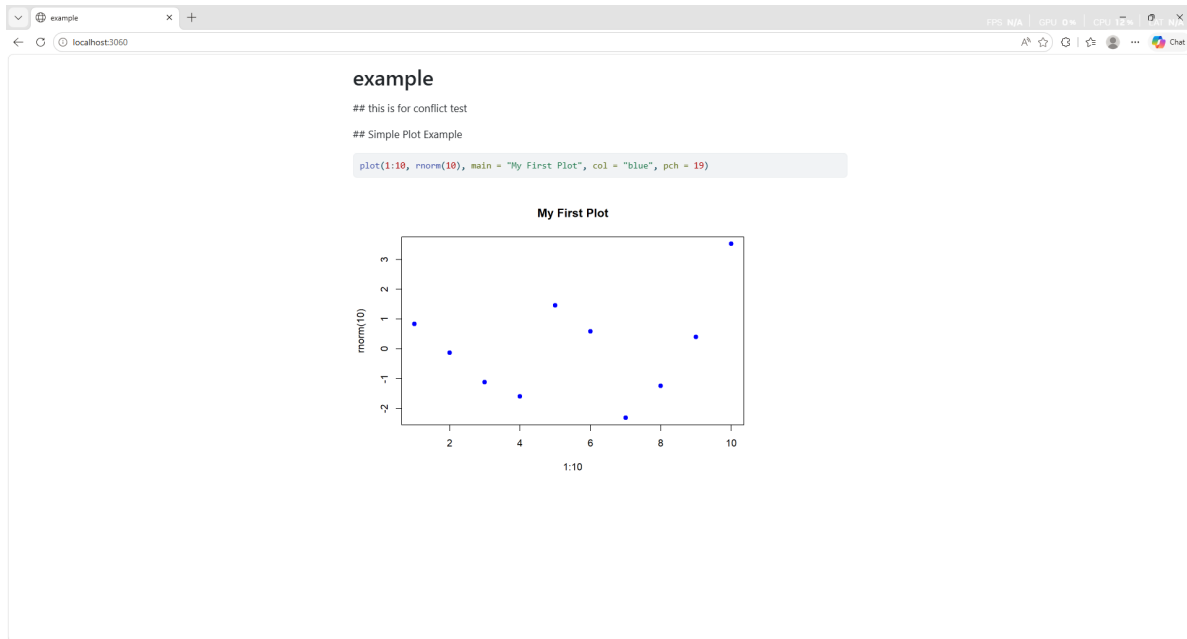

2. Initialise Git & Push to GitHub

```
git init
git add .
git commit -m "Initial commit: add assignment2 files"
git remote add origin https://github.com/yfan0161-stack/assignment2.git
git push -u origin main
```

3. Create testbranch & Push Changes

```
git checkout -b testbranch
git add example.qmd
git commit -m "Modify example.qmd in testbranch"
git push origin testbranch
```

4. Add data Folder & Amend Commit

```
git add data/
git commit --amend --no-edit
git push --force origin testbranch
```

5. Modify main to Create a Merge Conflict Switch back to main

```
git checkout main
```

Modify example.qmd at the same location as in testbranch to create a conflict

```
git add example.qmd
git commit -m "Modify example.qmd on main to create merge conflict"
git push origin main
```

6. Merge testbranch & Resolve Conflict

```
git merge testbranch
```

Resolve the conflict in example.qmd

```
PS C:\Rlibrary\5513\assignment2> git merge testbranch
Auto-merging example.qmd
CONFLICT (content): Merge conflict in example.qmd
Automatic merge failed; fix conflicts and then commit the result.
```

Figure 1: Git merge conflict

```
git add example.qmd
git commit -m "Resolve merge conflict between main and testbranch"
git push origin main
```

7. Tag the Commit v1.0

```
git tag -a v1.0 -m "Version 1.0: merge completed and conflict resolved"
git push origin v1.0
```

8.Delete testbranch Locally & Remotely

```
git branch -d testbranch
git push origin --delete testbranch
```


9.Show Condensed Commit Log

```
git log --oneline
```

Output: 64b8416 (HEAD -> main, tag: v1.0, origin/main) Resolve merge conflict between main and testbranch d088991 Modify example.qmd on main to create merge conflict 0dae4ee Modify example.qmd in testbranch e83f51d Initial commit: add assignment2 files

10. Add Plot & Undo Commit Without Losing Changes Add a new plot section to example.qmd ## Simple Plot Example

```
plot(1:10, rnorm(10), main = "My First Plot", col = "blue", pch = 19)
```

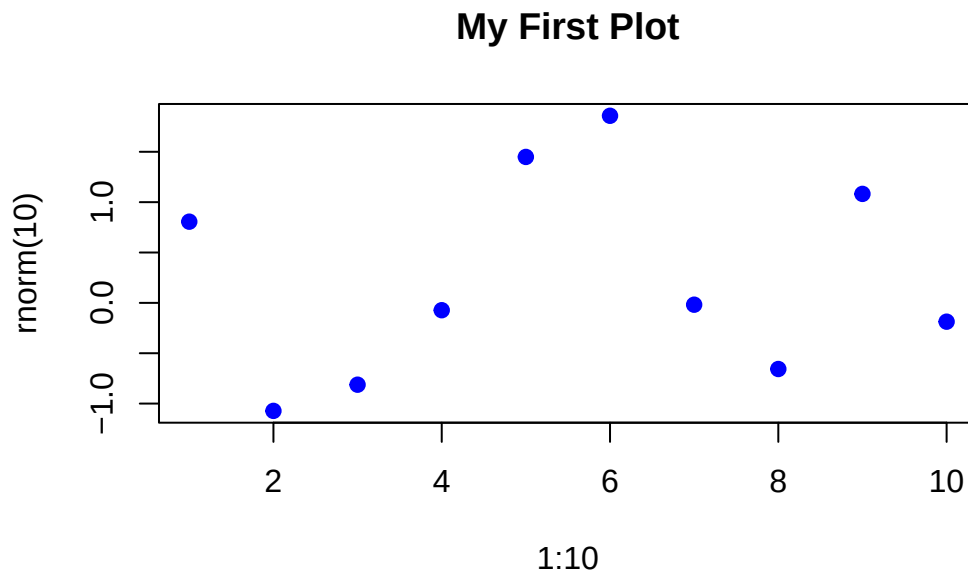

git commands

```
git add example.qmd  
git commit -m "Add simple plot section to example.qmd"  
git reset --soft HEAD~1
```