html

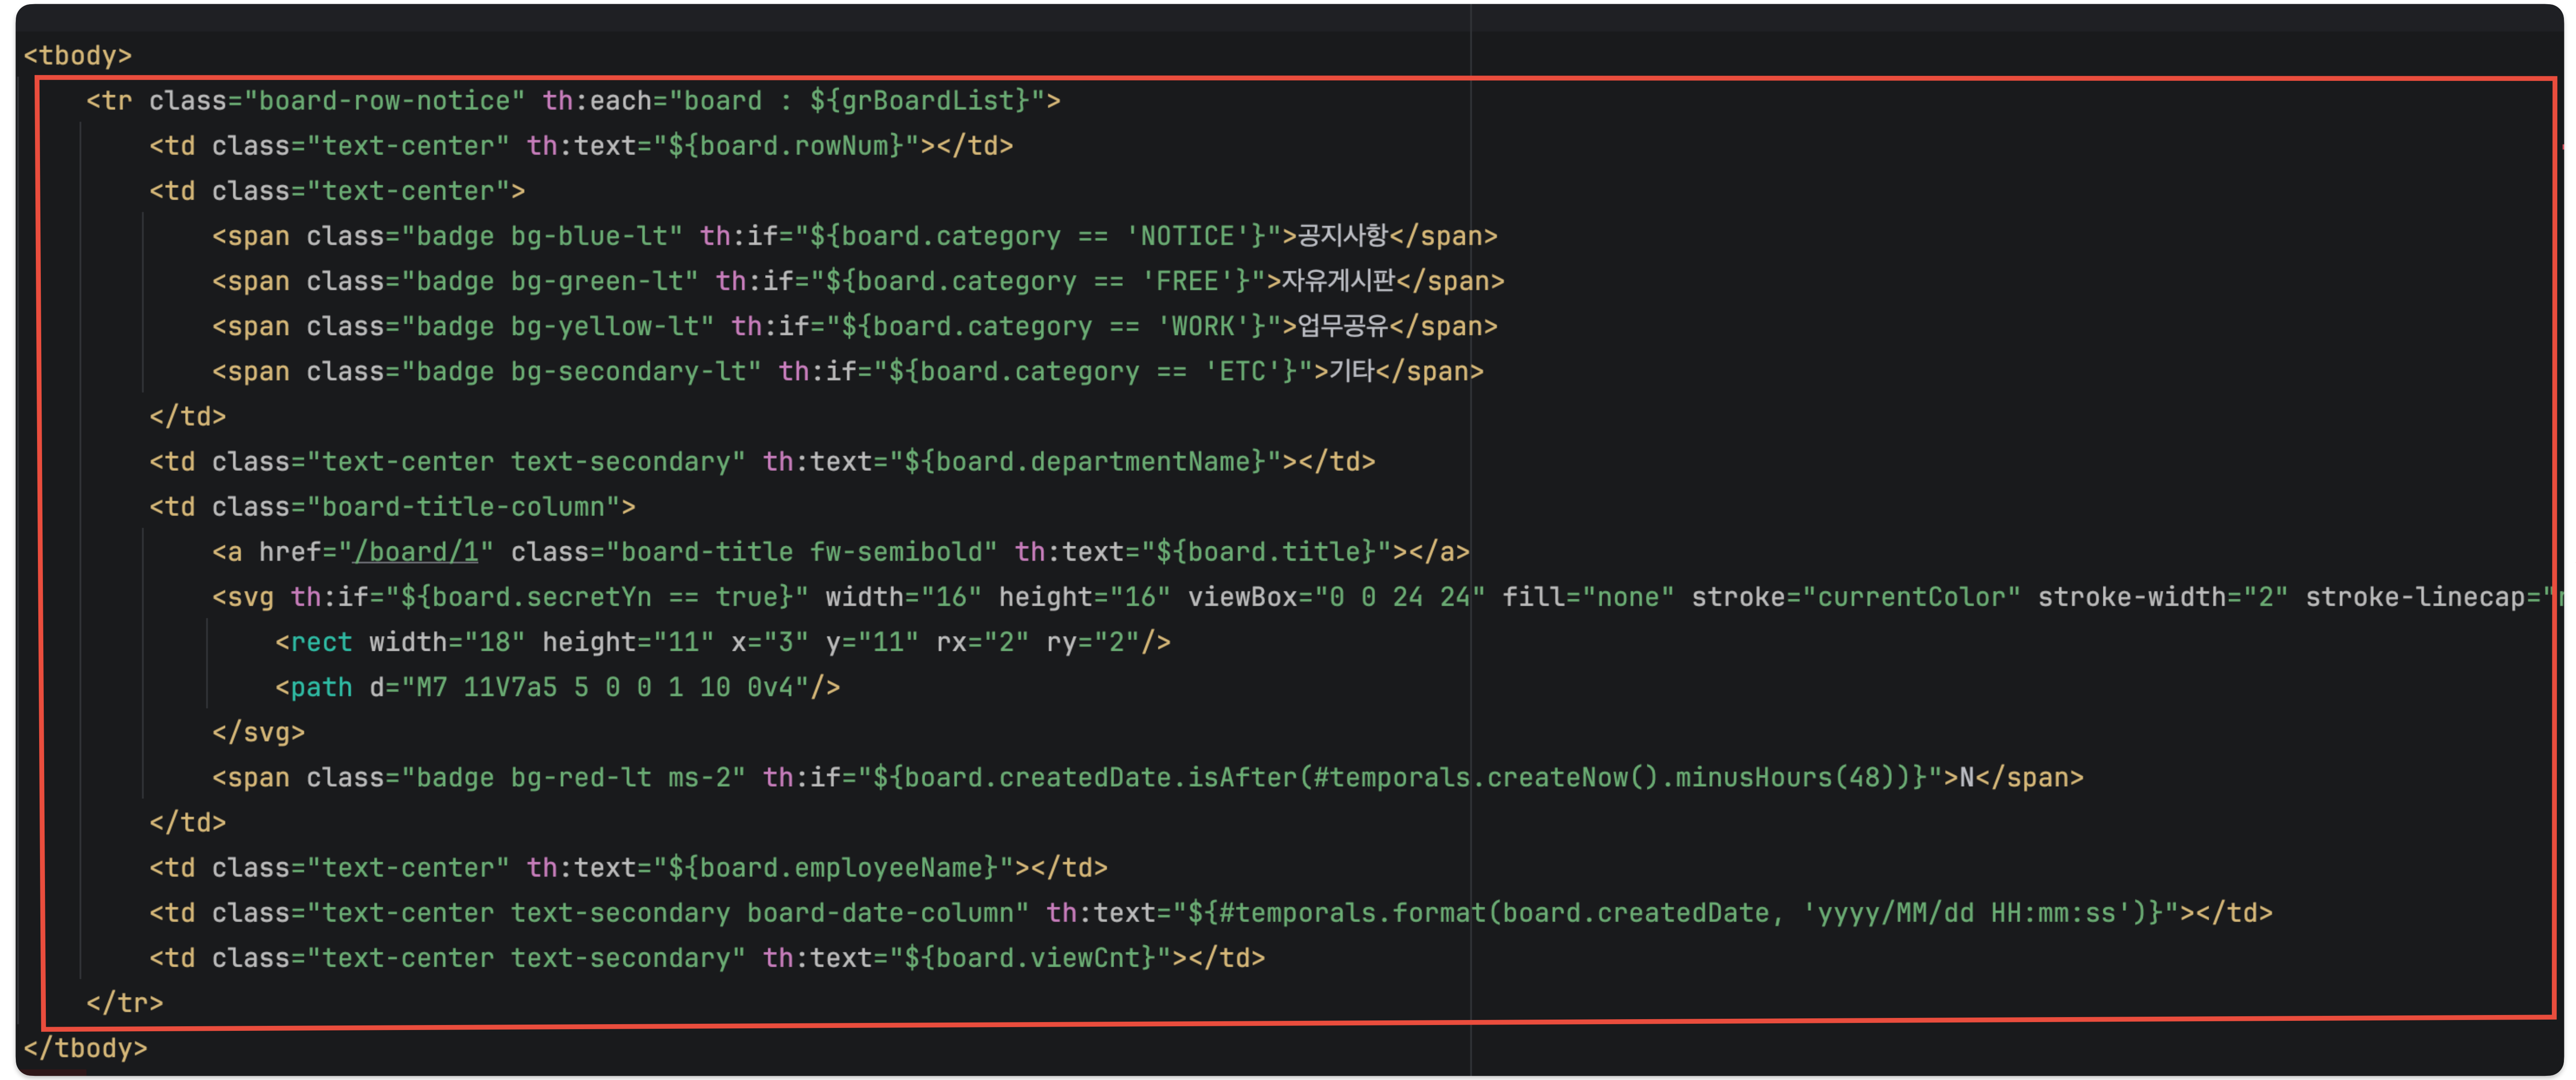

```html
<tbody>
    <tr class="board-row-notice" th:each="board : ${grBoardList}">
        <td class="text-center" th:text="${board.rowNum}"></td>
        <td class="text-center">
            <span class="badge bg-blue-lt" th:if="${board.category == 'NOTICE'}">공지사항</span>
            <span class="badge bg-green-lt" th:if="${board.category == 'FREE'}">자유게시판</span>
            <span class="badge bg-yellow-lt" th:if="${board.category == 'WORK'}">업무공유</span>
            <span class="badge bg-secondary-lt" th:if="${board.category == 'ETC'}">기타</span>
        </td>
        <td class="text-center text-secondary" th:text="${board.departmentName}"></td>
        <td class="board-title-column">
            <a href="/board/1" class="board-title fw-semibold" th:text="${board.title}"></a>
            <svg th:if="${board.secretYn == true}" width="16" height="16" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="
                <rect width="18" height="11" x="3" y="11" rx="2" ry="2"/>
                <path d="M7 11V7a5 5 0 0 1 10 0v4"/>
            </svg>
            <span class="badge bg-red-lt ms-2" th:if="${board.createdDate.isAfter(#temporals.createNow().minusHours(48))}">N</span>
        </td>
        <td class="text-center" th:text="${board.employeeName}"></td>
        <td class="text-center text-secondary board-date-column" th:text="${#temporals.format(board.createdDate, 'yyyy/MM/dd HH:mm:ss')}"></td>
        <td class="text-center text-secondary" th:text="${board.viewCnt}"></td>
    </tr>
</tbody>
```

model에 담아 전송

Controller

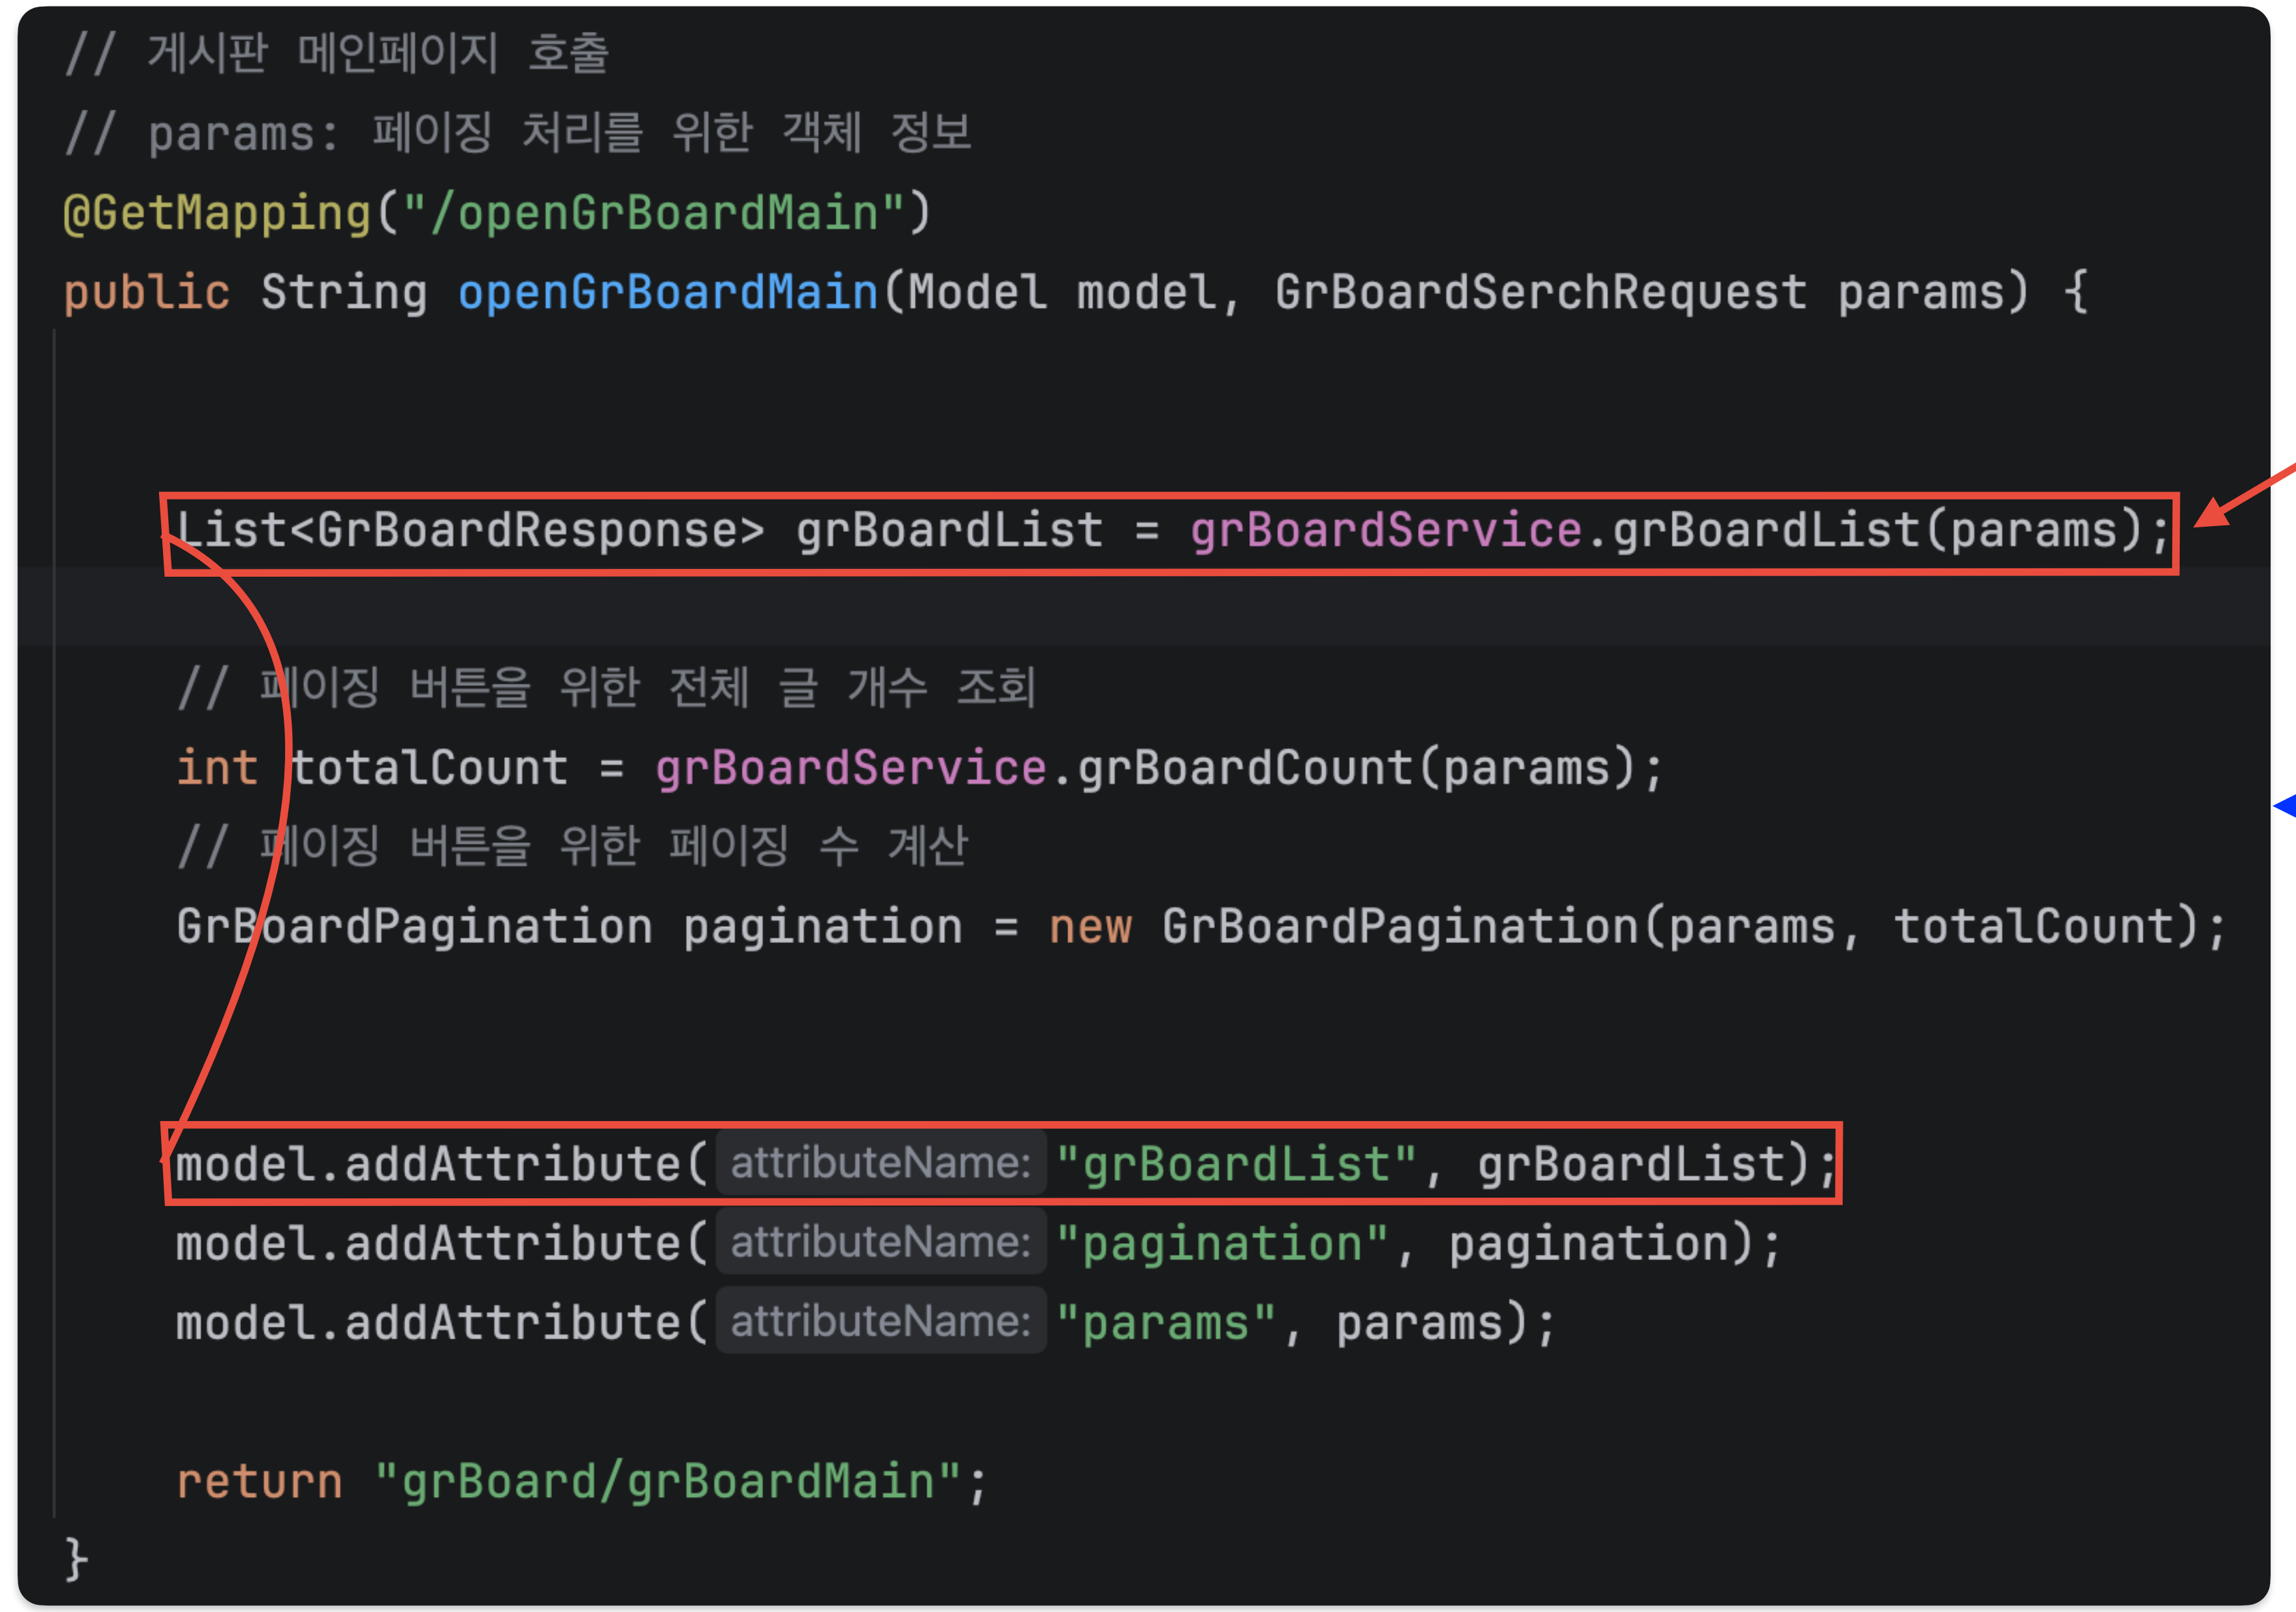

```java
// 게시판 메인페이지 호출
// params: 페이징 처리를 위한 객체 정보
@GetMapping("/openGrBoardMain")
public String openGrBoardMain(Model model, GrBoardSerchRequest params) {


    List<GrBoardResponse> grBoardList = grBoardService.grBoardList(params);

    // 페이징 버튼을 위한 전체 글 개수 조회
    int totalCount = grBoardService.grBoardCount(params);
    // 페이징 버튼을 위한 페이징 수 계산
    GrBoardPagination pagination = new GrBoardPagination(params, totalCount);


    model.addAttribute( attributeName: "grBoardList", grBoardList);
    model.addAttribute( attributeName: "pagination", pagination);
    model.addAttribute( attributeName: "params", params);

    return "grBoard/grBoardMain";
}
```

SELECT 결과 전송

service, mapper interface 생략

mapper XML

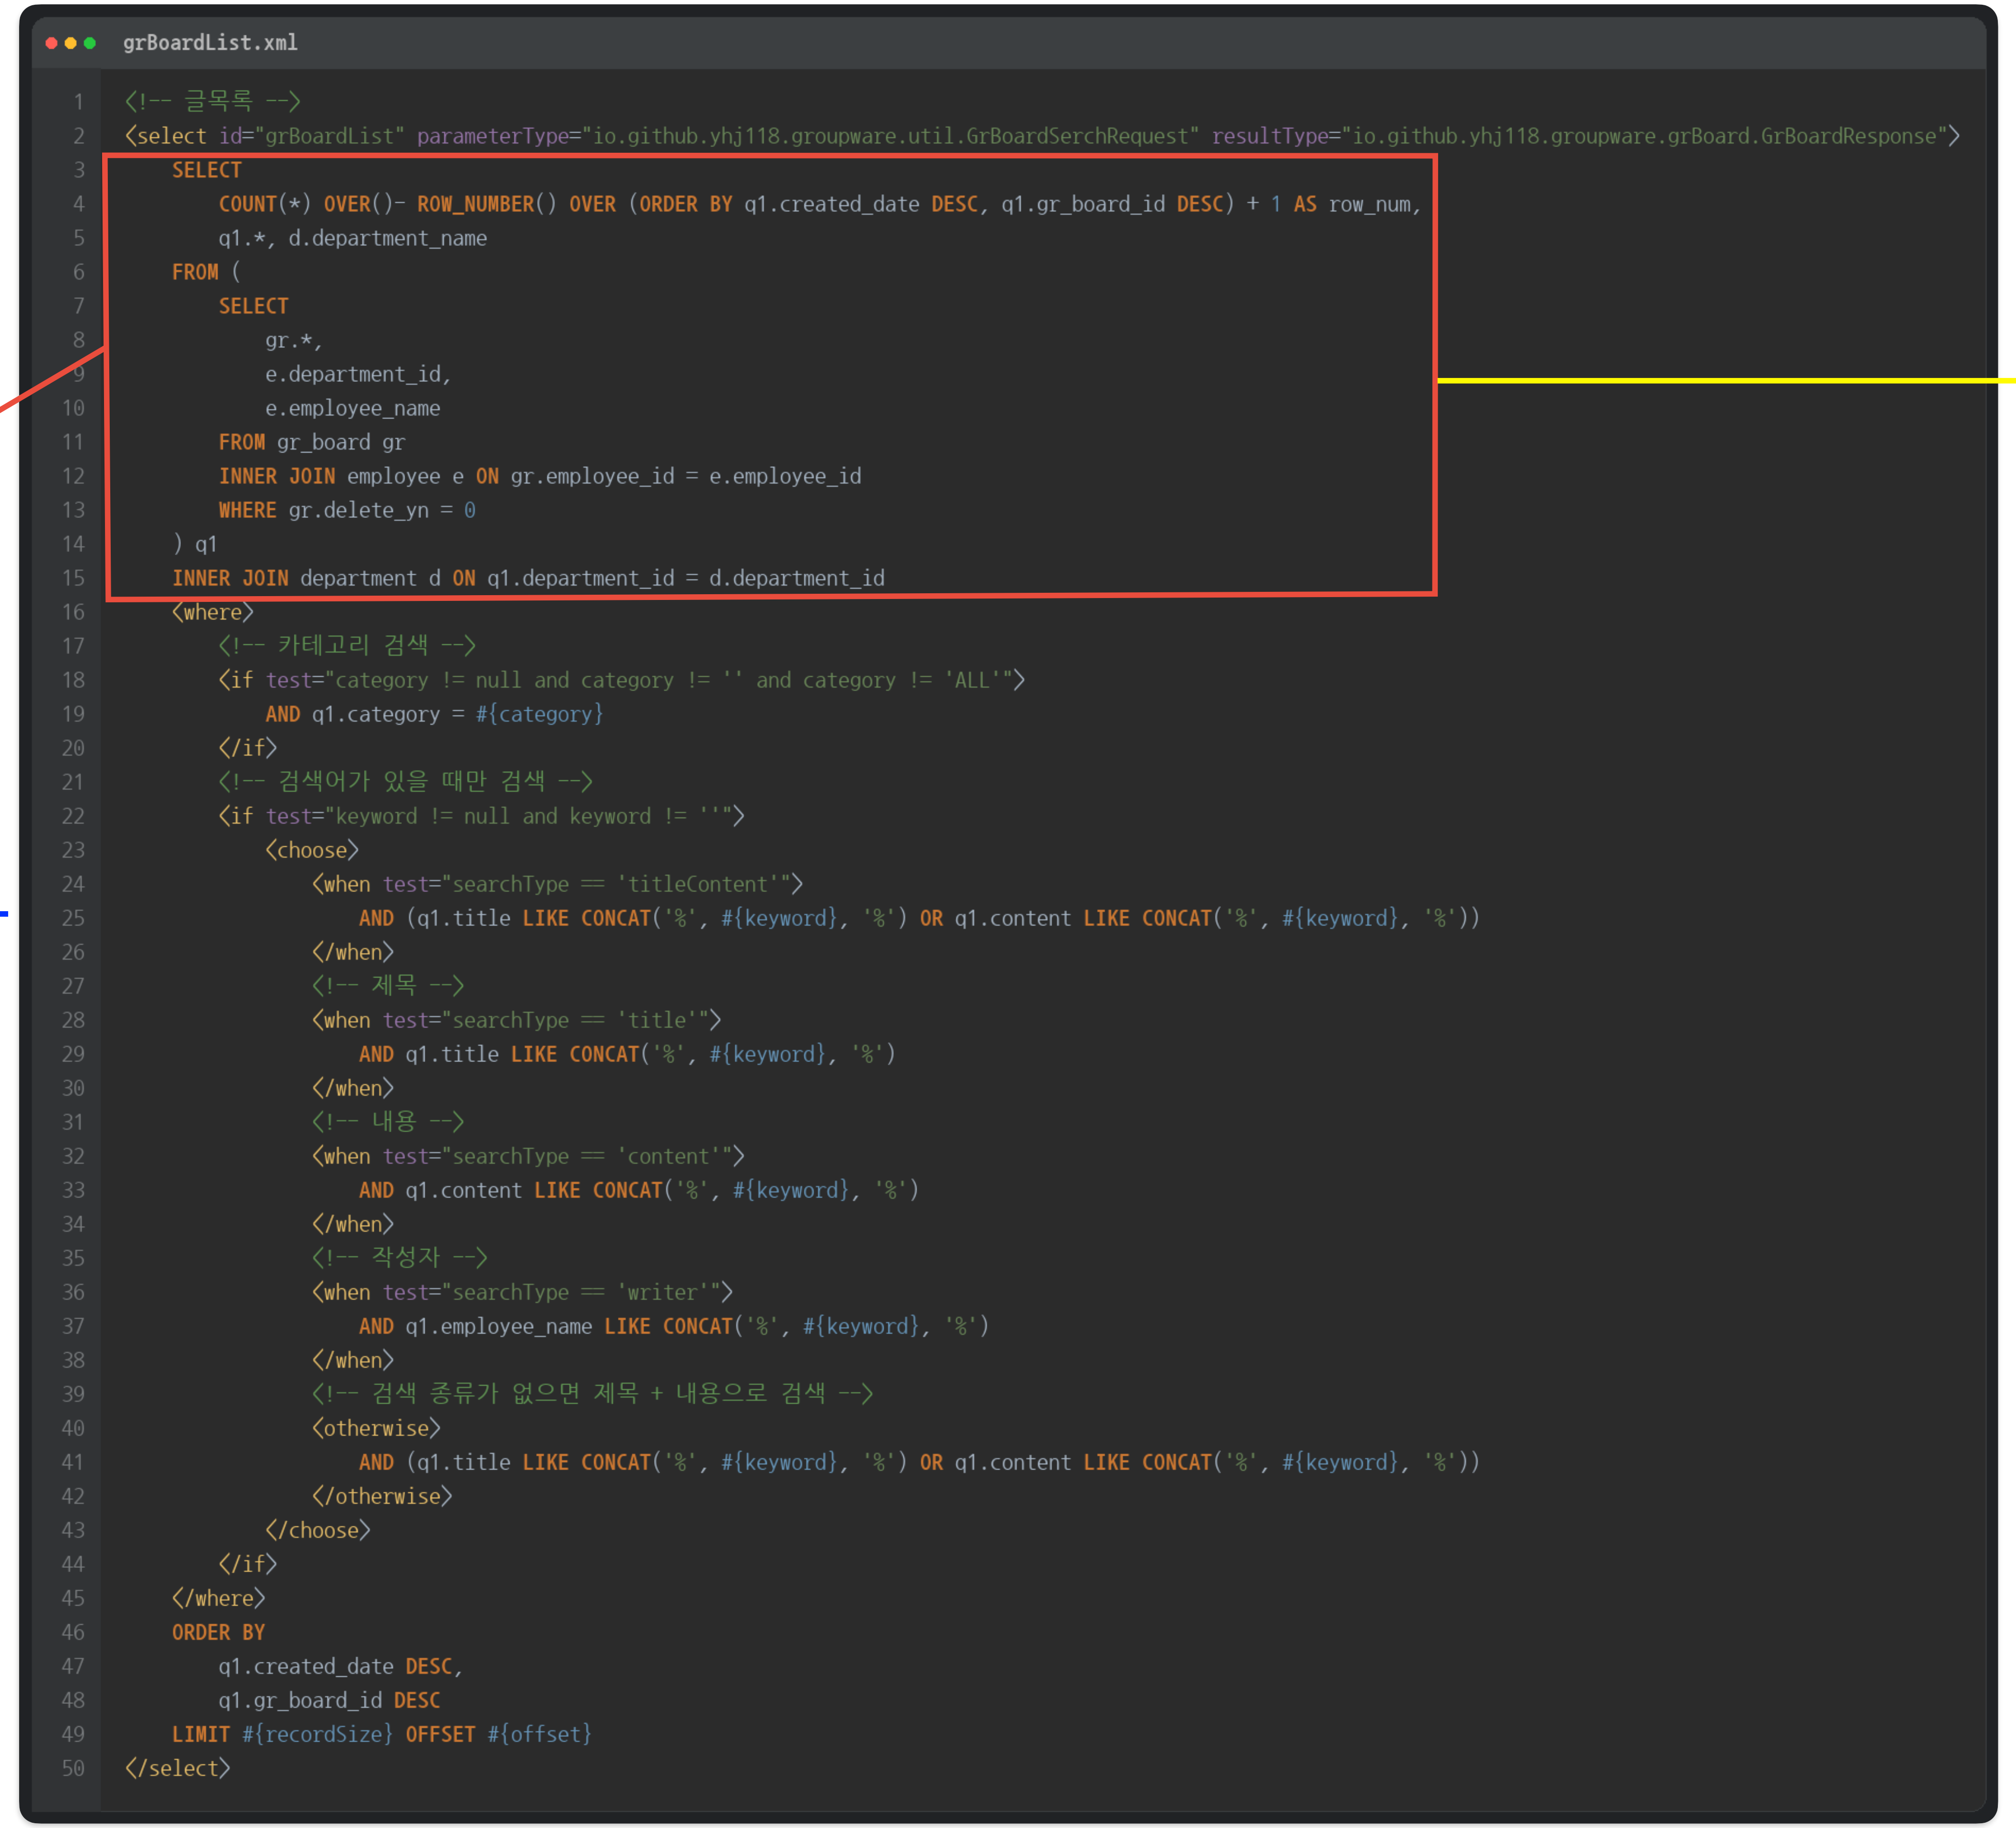

grBoardList.xml

```xml
<!-- 글목록 -->
<select id="grBoardList" parameterType="io.github.yhj118.groupware.util.GrBoardSerchRequest" resultType="io.github.yhj118.groupware.grBoard.GrBoardResponse">
    SELECT
        COUNT(*) OVER()- ROW_NUMBER() OVER (ORDER BY q1.created_date DESC, q1.gr_board_id DESC) + 1 AS row_num,
        q1.*, d.department_name
    FROM (
        SELECT
            gr.*,
            e.department_id,
            e.employee_name
        FROM gr_board gr
        INNER JOIN employee e ON gr.employee_id = e.employee_id
        WHERE gr.delete_yn = 0
    ) q1
    INNER JOIN department d ON q1.department_id = d.department_id
    <where>
        <!-- 카테고리 검색 -->
        <if test="category != null and category != '' and category != 'ALL'">
            AND q1.category = #{category}
        </if>
        <!-- 검색어가 있을 때만 검색 -->
        <if test="keyword != null and keyword != ''">
            <choose>
                <when test="searchType == 'titleContent'">
                    AND (q1.title LIKE CONCAT('%', #{keyword}, '%') OR q1.content LIKE CONCAT('%', #{keyword}, '%'))
                </when>
                <!-- 제목 -->
                <when test="searchType == 'title'">
                    AND q1.title LIKE CONCAT('%', #{keyword}, '%')
                </when>
                <!-- 내용 -->
                <when test="searchType == 'content'">
                    AND q1.content LIKE CONCAT('%', #{keyword}, '%')
                </when>
                <!-- 작성자 -->
                <when test="searchType == 'writer'">
                    AND q1.employee_name LIKE CONCAT('%', #{keyword}, '%')
                </when>
                <!-- 검색 종류가 없으면 제목 + 내용으로 검색 -->
                <otherwise>
                    AND (q1.title LIKE CONCAT('%', #{keyword}, '%') OR q1.content LIKE CONCAT('%', #{keyword}, '%'))
                </otherwise>
            </choose>
        </if>
    </where>
    ORDER BY
        q1.created_date DESC,
        q1.gr_board_id DESC
    LIMIT #{recordSize} OFFSET #{offset}
</select>
```

- ROWNUM()으로 가상번호 부여(게시판 글번호 처리)
1. COUNT(*) OVER() : 전체 행 개수를 구하고(COUNT(*)) 각 행마다 행 개수를 부여(OVER())
2. ROW_NUMBER() OVER() : select된 결과에 행마다 가상컬럼을 부여
3. COUNT(*) OVER() - ROW_NUMBER(...) OVER() +1 계산

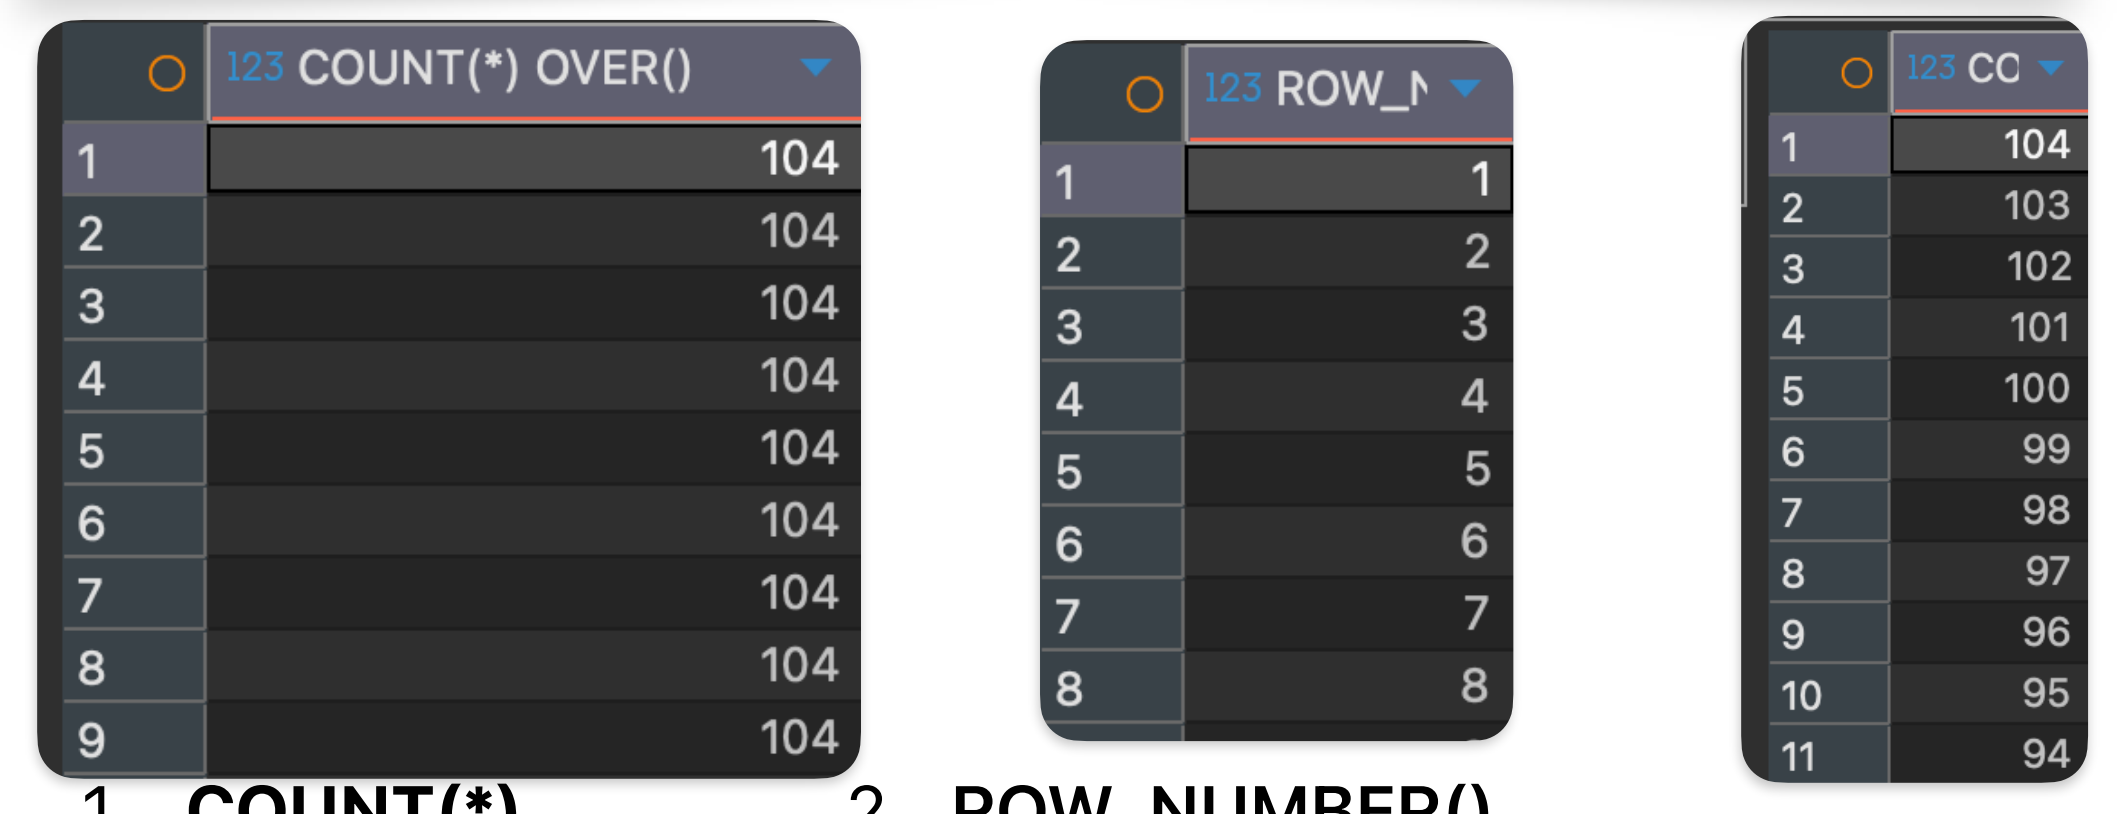

	COUNT(*) OVER()
1	104
2	104
3	104
4	104
5	104
6	104
7	104
8	104
9	104

1. COUNT(*) OVER()

	ROW_N
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8

2. ROW_NUMBER() OVER()

	CC
1	104
2	103
3	102
4	101
5	100
6	99
7	98
8	97
9	96
10	95
11	94

3. 계산