


Euclidean geometry retrieves false neighbors


Controlled probe over 64 ImageNet anchors; each set contains 1 weak view, 1 spatial corruption, and 63 geometric impostors.

A Weak-view retrieval (higher is better)

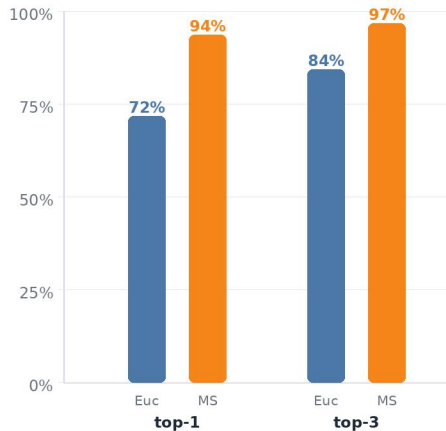


B Margins (higher is better)

(false - weak) / (false + weak); positive means weak is closer

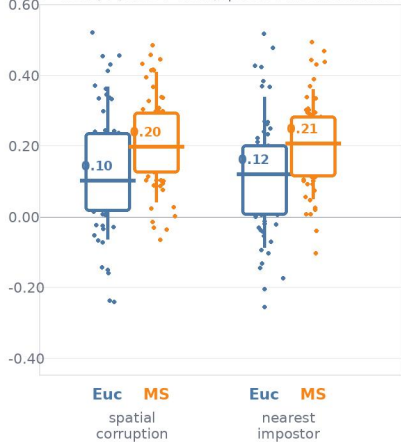

C False-neighbor rate (lower is better)

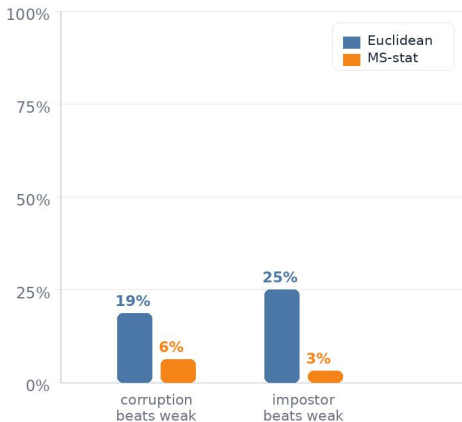

Geometric impostors are anchor-derived roll/shuffle corruptions hard-mined by Euclidean descriptor distance; both metrics score the same candidate sets.