

Metric turns noisy supports into coherent drift directions


Known local positives are weak anchor views; false supports are Euclidean-mined layout impostors.

A Nearest-support purity

128 generated anchors; each pool has 8 weak positives and 32 Euclidean-mined layout impostors.



B Resampled drift-force distributions

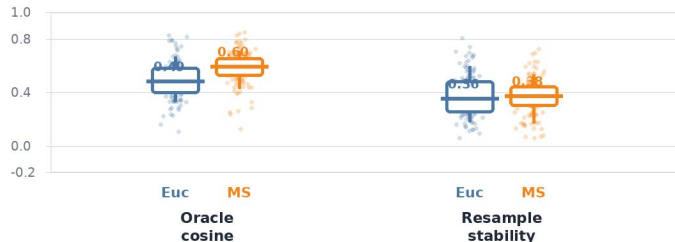

C Drift-estimator read

MS-stat adds 15.8 points weak-support mass.

Oracle-force cosine increases by 0.09.

Resampling stability stays comparable (0.38 vs 0.37).

This tests the metric where it is used: finite supports must create a coherent attraction direction.