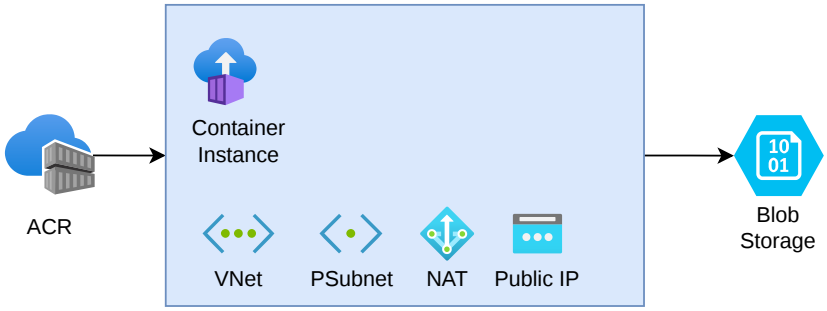

Launch long-run spider tasks in Azure container instances under a whitelisted static IP (to proxy service) which pipe silver data to blob storage.

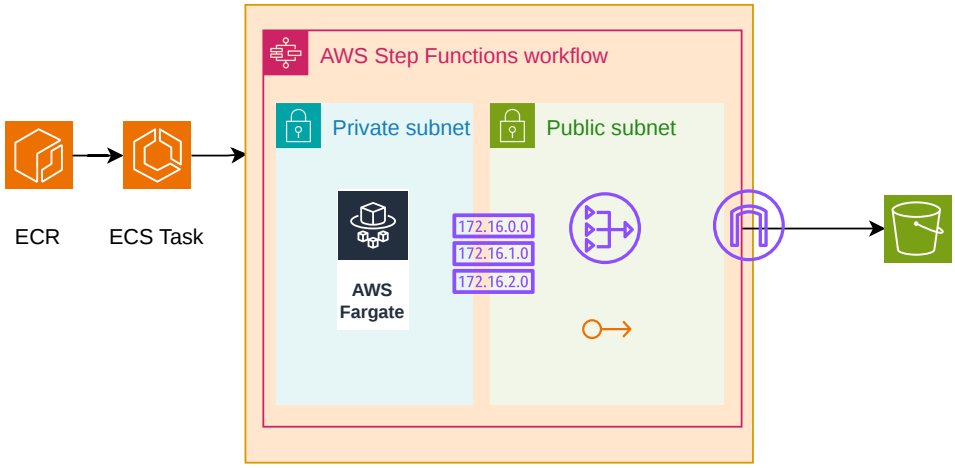

Launch long-run spider tasks in AWS Fargate in a private subnet that has a routing table configured to route outbound traffic in a public subnet such that the NAT gateway can open a connection to ECR on behalf of the task. The public subnets are routed to use an internet gateway with an elastic IP address (whitelisted by proxy service).