# Quarterly Notes · 季度笔记

A short demo of everything this converter can render. Edit the left side and watch the paper on the right update. ✨

## Text

**Bold**, *italic*, ~~strikethrough~~, `inline code`, and a link.

> Blockquotes get a coloured rule on the left — handy for callouts.

- [x] GitHub-style task lists
- [x] Tables, code, math and diagrams
- [ ] Your own content

## 中文排版

中文、日本語、한국어 都能正常显示。这里是一段较长的中文文字，用来检查换行与字体：人工智能模型的价格每天都在变化，所以我们需要一张清晰的价格表。

## Table

| Model | Input $/1M | Output $/1M | Context |
|---|---|---|---|
| Alpha | 0.50 | 1.50 | 128k |
| Beta | 3.00 | 15.00 | 200k |
| 伽马 | 0.14 | 0.28 | 64k |

## Code

```
def fib(n: int) -> int:
    a, b = 0, 1
    for _ in range(n):
        a, b = b, a + b
    return a

print([fib(i) for i in range(10)])  # 斐波那契
```

```
const total = items.reduce((sum, x) => sum + x.price, 0);
console.log(`Total: ${total.toFixed(2)}`);
```


## Math

Inline: $E = mc^2$ and $a^2 + b^2 = c^2$.

$$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

$$\int_a^b f'(x)\,dx = f(b) - f(a)$$

## Diagram

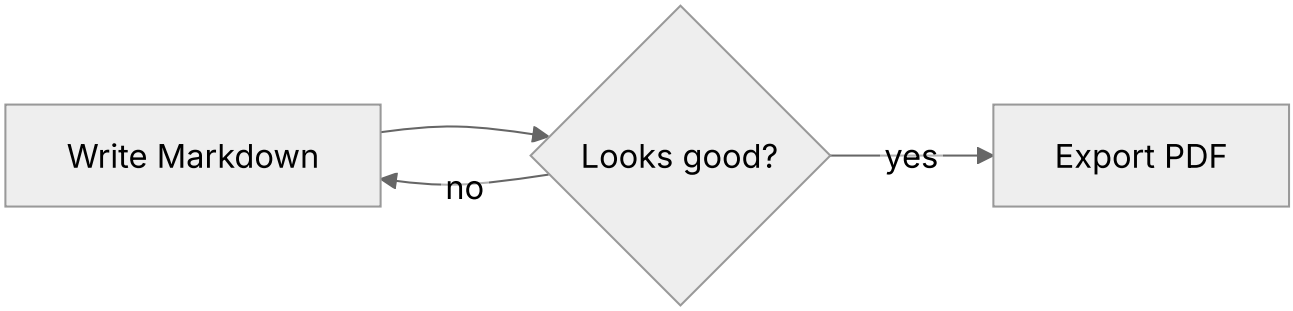

## Page breaks

This section starts on a new page. Put `\newpage` (or `<div class="page-break"></div>`) on its own line to force a break. A `---` line is just a horizontal rule.

---

Emoji shortcodes: 🚀 ✅ ⚠️ 🎉

测试实时预览 live-check-123