Related Articles

Write an Article

Write an Interview Experience

Tailwind CSS

Introduction to Tailwind CSS

Tailwind CSS Layout

Tailwind CSS Flexbox

Tailwind CSS Grid

Tailwind CSS Alignment

Tailwind CSS Justify Content

Tailwind CSS Justify Items

Tailwind CSS Justify Self

Tailwind CSS Align Content

Tailwind CSS Align Items

Tailwind CSS Align Self

Tailwind CSS Place Content

Tailwind CSS Place Items

Tailwind CSS Place Self

Tailwind CSS Spacing

Tailwind CSS Sizing

Tailwind CSS Typography

Tailwind CSS Backgrounds

Tailwind CSS Borders

Tailwind CSS Effects

Tailwind Filters

rapid custom

s you all of the

styling and

ır own CSS.

hoose the fast

come with

inbuilt a lot of features and styles for users to choose from and is also used to reduce the tendency of writing CSS code and create a beautiful custom UI. It will help you to overcome the complicated task. Tailwind CSS creates small utilities with a defined set of options enabling easy integration of existing classes directly into the HTML code.

Tailwind CSS CDN Link:

<link href="https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css" rel="stylesheet">

Note: There are some limitations when CDN is used. Some of them are:

- Customize Tailwind's default theme can't be used
- Directives like @apply, @variants, etc can't be used
- Can't install third-party plugins

Installation of Tailwind CSS:

Through npm:

- Basically Tailwind is available on npm and you can install it using the following command:

```
npm install tailwindcss
```

- After that create ad Tailwind configuration file using the following command:

```
npm tailwind init {name of file}
```

Through yarn:

- You can install tailwind by using the yarn command:

```
yarn add tailwindcss
```

- After that create ad Tailwind configuration file using the following command:

```
yarn tailwind init {name of file}
```

Example: It is a basic example of Tailwind CSS that describes how to change the background color on mouse hover.

- Tailwind CSS

```
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <!-- Tailwind CSS CDN link -->
    <link href=
"https://unpkg.com/tailwindcss@^2/dist/
tailwind.min.css"
          rel="stylesheet">
</head>

<body>
    <div class="h-full border-2 border-gray-200
                border-opacity-60 rounded-lg
                overflow-hidden">

        <div class="p-6 hover:bg-green-600
                    hover:text-white transition
                    duration-300 ease-in">

            <h1 class="text-2xl font-semibold mb-3">
                Hover
            </h1>
        </div>
    </div>
</body>

</html>
```

Introduction to Tailwind CSS

- Difficulty Level : **Medium**
- Last Updated : 22 Dec, 2022

  - **Read**
  - **Discuss**

- **Courses**
- **Practice**
- **Video**

d CSS can be used to style websites in the fastest and easiest way.

Tailwind CSS is basically a utility-first CSS framework for rapidly building custom user interfaces. It is a highly customizable, low-level CSS framework that gives you all of the building blocks you need to build bespoke designs without any annoying opinionated styles you have to fight to override.

The beauty of this thing called tailwind is it doesn’t impose design specifications or how your site should look, you simply bring tiny components together to construct a user interface that is unique. What Tailwind simply does is take a ‘raw’ CSS file, process this CSS file over a configuration file, and produces an output.

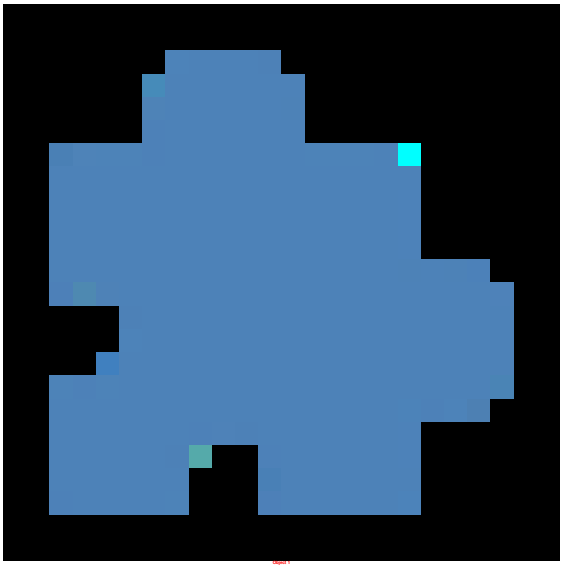

Why Tailwind CSS?

- Faster UI building process
- It is a utility-first CSS framework which means we can use utility classes to build custom designs without writing CSS as in the traditional approach.

Advantages of Tailwind CSS:

- No more silly names for CSS classes and Id’s.
- Minimum lines of Code in CSS file.
- We can customize the designs to make the components.
- Makes the website responsive.
- Makes the changes in the desired manner.
  CSS is global in nature and if make changes in the file the property is changed in all the HTML files linked to it. But with the help of Tailwind CSS we can use utility classes and make local changes.

Installation: There are two ways to use the CSS we can install them on our server or we can use the CDN link as well.

Method 1: Install Tailwind via npm

- Step 1:
  ```
  npm init -y
  ```
- Step 2:
  ```
  npm install tailwindcss
  ```
- Step 3:Use the @tailwind directive to inject Tailwind's base, components, and utility styles into your CSS file.
  ```
  @tailwind base;

  @tailwind components;

  @tailwind utilities;
  ```

- Step 4: This is used to create a config file to customize the designs. It is an optional step.

  `npx tailwindcss init`

- Step 5:This command is used to compile style.css is the file that has to be compiled and output.css is the file on which it has to be compiled. If the file output.css is not created earlier then it will automatically be created.

  `npx tailwindcss build styles.css -o output.css`

Method 2: Using Tailwind via CDN

<link href="https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"rel="stylesheet">

Limitation of Tailwind: But there are some limitations when CDN is used. Some of them are:

- Customize Tailwind's default theme can't be used
- Directives like @apply, @variants, etc can't be used
- Can't install third-party plugins

Example:

- html

```html
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">

    <!-- Tailwind CSS CDN link -->
    <link href=
"https://unpkg.com/tailwindcss@^2/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="m-4">
    <h1 class="text-green-500 text-4xl font-bold">
        Geeksforgeeks
```

```
    </h1>
    <strong>Tailwind CSS Tutorial</strong>
    <p>
        You can use Tailwind CSS as a replacement of CSS,
        this is a framework that increase your pace to
        design any website.</p>

</body>

</html>
```

Tailwind CSS Container

- Difficulty Level : **Hard**
- Last Updated : 23 Mar, 2022

  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

vind CSS, a container is used to fix the *max-width* of an element to match the *min-width* of the breakpoint. It comes very handy when content has to be displayed in a responsive manner to every breakpoint.

Breakpoints in tailwind CSS are as follows.

Breakpoint	min-width
sm	640px
md	768px
lg	1024px
xl	1280px

2xl	1536px

Tailwind CSS does not center itself automatically and also does not contain any pre-defined padding. The following are some utility classes that make the container class stand out.

mx-auto: To center the container, we use *mx-auto* utility class. It adjust the margin of the container automatically so that the container appears to be in center.

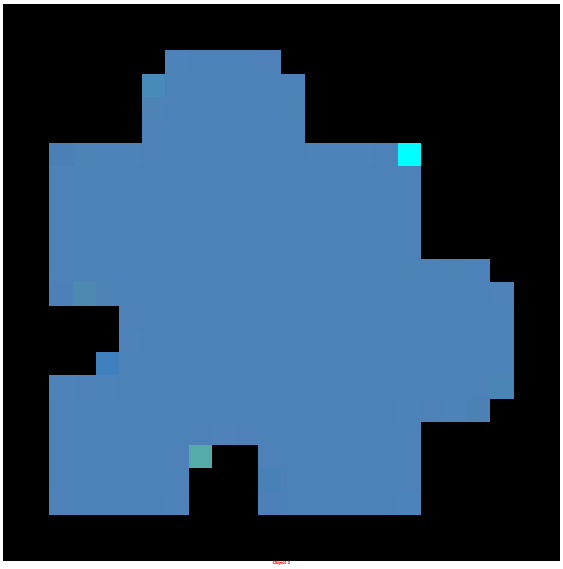

Syntax:

```
<element class="mx-auto">...</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<html>

<head>
    <link href=
```

```
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">

    <style>
        .container {
            background-color: rgb(2, 201, 118);
            color: white;
        }

        h2 {
            text-align: center;
        }
    </style>
</head>

<body>
    <h2 style="color:green">
        GeeksforGeeks
    </h2><br />

    <div class="container mx-auto">
        This is mx-auto class
    </div>
</body>

</html>
```

Output:

mx-auto class

px-{size}: To add padding the container, we use *px-{size}* utility class. It adds horizontal padding to the container which is equal to the size mentioned.

Syntax:

```
<element class="px-20">...</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<html>
```

```
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">

    <style>
        .container {
            background-color: rgb(2, 201, 118);
            color: white;
        }

        h2 {
            text-align: center;
        }
    </style>
</head>

<body>
    <h2 style="color:green">
        GeeksforGeeks
    </h2>
    <br />

    <div class="container mx-auto px-20">
        This is px-20 class
    </div>
</body>

</html>
```

Tailwind CSS Display

- Difficulty Level : **Easy**
- Last Updated : 23 Mar, 2022

  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts more than one value in tailwind CSS. All the properties are covered as in class form. It is the alternative to the **CSS display property**. This class is used to define how the components (div, hyperlink,

heading, etc) are going to be placed on the web page. As the name suggests, this property is used to define the display of the different parts of a web page.

Display Classes:

- block: It is used to display an element as a block element.
- inline-block: It is used to display an element as an inline-level block container.
- inline: It is used to display an element as an inline element.
- flex: It is used to display an element as a block-level flex container.
- inline-flex: It is used to display an element as an inline-level flex container.
- table: It is used to set the behavior as <table> for all elements.
- table-caption: It is used to set the behavior as <caption> for all elements.
- table-cell: It is used to set the behavior as <td> for all elements.
- table-column: It is used to set the behavior as <col> for all elements.
- table-column-group: It is used to set the behavior as <column> for all elements.
- table-footer-group: It is used to set the behavior as <footer> for all elements.
- table-header-group: It is used to set the behavior as <header> for all elements.
- table-row-group: It is used to set the behavior as <row> for all elements.
- table-row: It is used to set the behavior as <tr> for all elements.
- flow-root: It is used to set the default value.
- grid: It is used to display an element as a block-level grid container.
- inline-grid: It is used to display an element as an inline-level grid container.

- contents: It is used to disappear the container.
- hidden: It is used to remove the element.

block: It is used to display an element as a block-level element. This class is used as the default property of *div*. This class places the div one after another vertically. The height and width of the *div* can be changed using the block class if the width is not mentioned, then the *div* under *block* class will take up the width of the container.

Syntax:

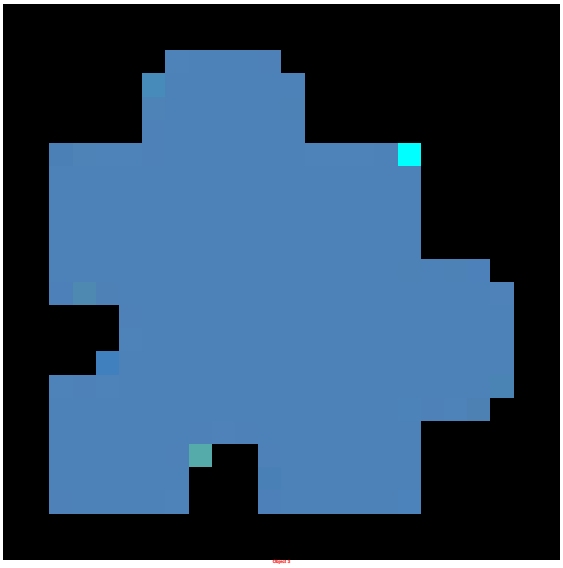

<element display="block">...</element>

Example 1:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
    "https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
     rel="stylesheet">
</head>

<body class="text-center">
```

```
<center>
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS block Class</b>
    <div class="bg-green-200 p-4 mx-16 space-y-4">
        <span class="block h-12 bg-green-500 rounded-lg">1</span>
        <span class="block h-12 bg-green-500 rounded-lg">2</span>
        <span class="block h-12 bg-green-500 rounded-lg">3</span>
    </div>
</center>
</body>

</html>
```

Output:

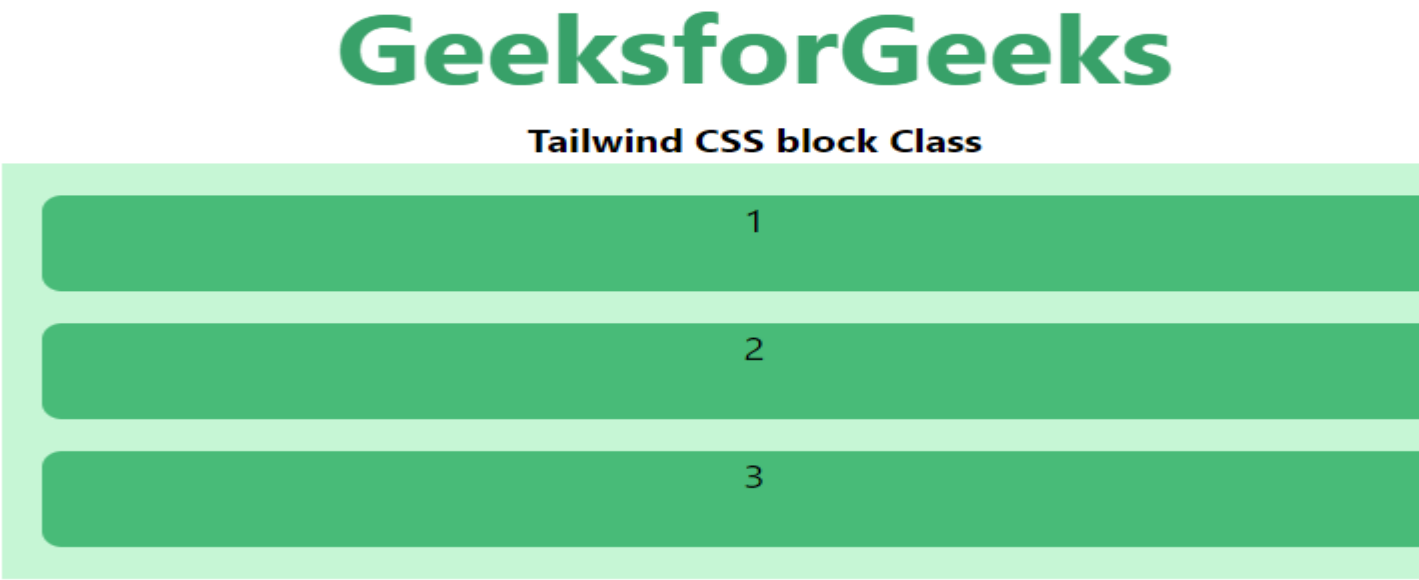

inline-block: It is used to display an element as an inline-level block container. This feature uses both properties mentioned above, block and inline. So, this class aligns the *div* inline but the difference is it can edit the height and the width of the block. Basically, this will align the div both in the block and inline fashion.

Syntax:

```
<element display="inline-block">...</element>
```

Example 2:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
    "https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
     rel="stylesheet">
</head>

<body class="text-center">
<center>
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS inline-block Class</b>
    <div class="bg-green-200 p-4 mx-16 space-y-4">
        <span class="inline-block w-32 h-12 bg-green-500 rounded-
lg">1</span>
        <span class="inline-block w-32 h-12 bg-green-500 rounded-
lg">2</span>
        <span class="inline-block w-32 h-12 bg-green-500 rounded-
lg">3</span>
    </div>
</center>
</body>

</html>
```

Tailwind CSS Float

- Last Updated : 23 Mar, 2022

  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts more than one value in **tailwind CSS**. It is the alternative to the **CSS float property**. The float class defines the flow of content for controlling the wrapping of content around an element.

Float Classes:

- float-right

- float-left
- float-none

float-right: This class is used to make the element float on the right side of the container.

Syntax:

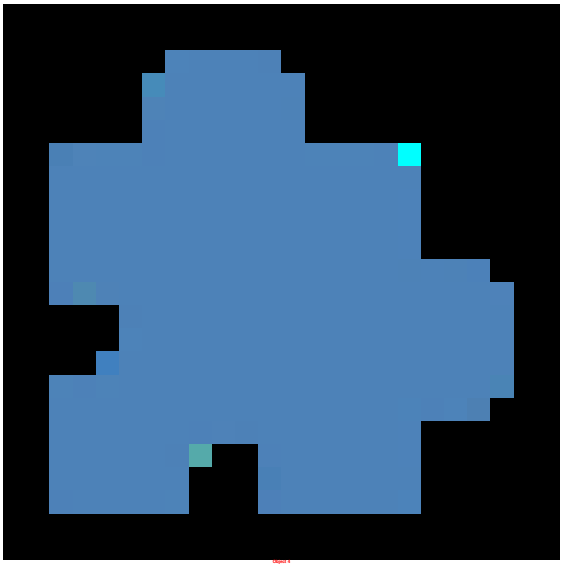

<element class="float-right">...</element>

Example:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="text-center">
<center>
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS float Class</b>
```

```
    <div class="mx-10">
    <img class="float-right p-2"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
    <p class="text-justify    ">How many times were you frustrated while
looking out
       for a good collection of programming/algorithm/interview
       questions? What did you expect and what did you get?
       This portal has been created to provide well written,
       well thought and well explained solutions for selected
       questions. An IIT Roorkee alumnus and founder of
       GeeksforGeeks. He loves to solve programming problems
       in most efficient ways. Apart from GeeksforGeeks, he
       has worked with DE Shaw and Co. as a software developer
       and JIIT Noida as an assistant professor.It is a good
       platform to learn programming. It is an educational
       website. Prepare for the Recruitment drive of product
       based companies like Microsoft, Amazon, Adobe etc with
       a free online placement preparation course.</p>

</center>
</body>

</html>
```

Output:

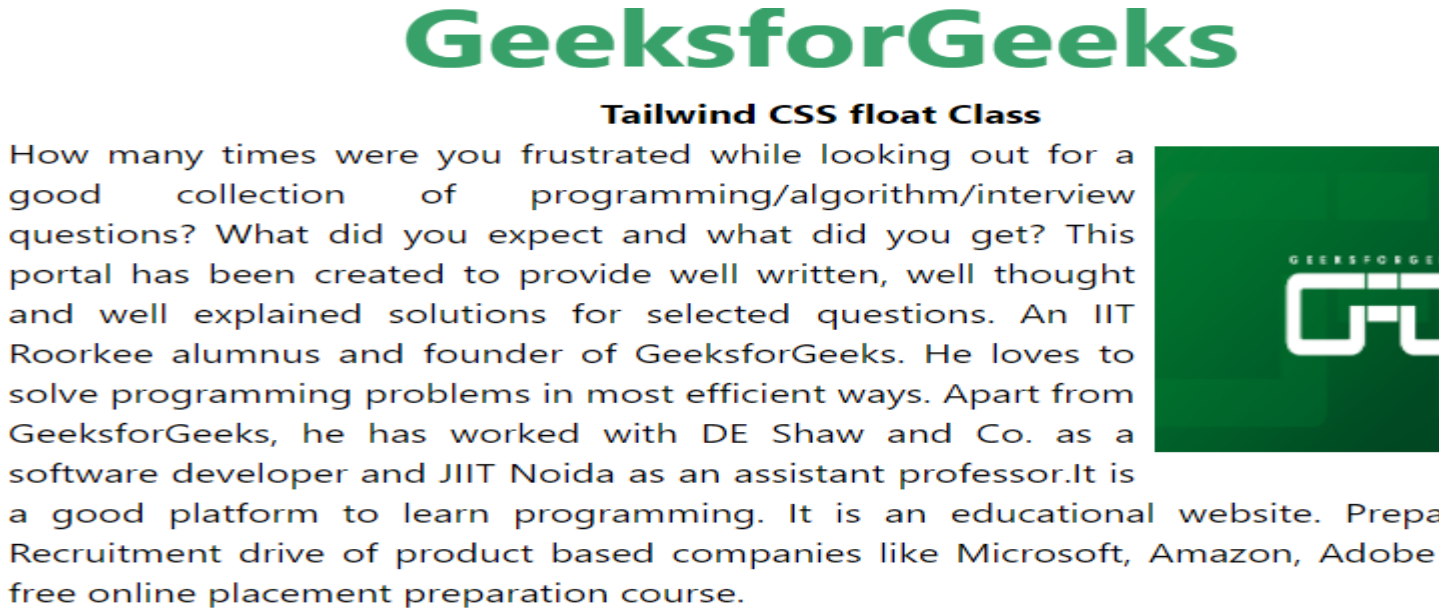

float-left: This class is used to make the element float on the left side of the container.

Syntax:

```
<element class="float-left"">...</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<head>

    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
           rel="stylesheet">
</head>

<body class="text-center">
<center>
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS float Class</b>
    <div class="mx-10">
    <img class="float-left p-2"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
    <p class="text-justify    ">How many times were you frustrated while
looking out
       for a good collection of programming/algorithm/interview
       questions? What did you expect and what did you get?
       This portal has been created to provide well written,
       well thought and well explained solutions for selected
       questions. An IIT Roorkee alumnus and founder of
       GeeksforGeeks. He loves to solve programming problems
       in most efficient ways. Apart from GeeksforGeeks, he
       has worked with DE Shaw and Co. as a software developer
       and JIIT Noida as an assistant professor.It is a good
       platform to learn programming. It is an educational
       website. Prepare for the Recruitment drive of product
       based companies like Microsoft, Amazon, Adobe etc with
       a free online placement preparation course.</p>

</center>
</body>

</html>
```

Output:

float-none: This class is used to make the element float at the default place. We are using the center tag so the image is placed at the center.

Syntax:

```
<element class="float-none">...</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="text-center">
<center>
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS float Class</b>
    <div class="mx-10">
    <img class="float-none p-2"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
    <p class="text-justify    ">How many times were you frustrated while
looking out
      for a good collection of programming/algorithm/interview
```

```
        questions? What did you expect and what did you get?
        This portal has been created to provide well written,
        well thought and well explained solutions for selected
        questions. An IIT Roorkee alumnus and founder of
        GeeksforGeeks. He loves to solve programming problems
        in most efficient ways. Apart from GeeksforGeeks, he
        has worked with DE Shaw and Co. as a software developer
        and JIIT Noida as an assistant professor.It is a good
        platform to learn programming. It is an educational
        website. Prepare for the Recruitment drive of product
        based companies like Microsoft, Amazon, Adobe etc with
        a free online placement preparation course.</p>

</center>
</body>

</html>
```

Tailwind CSS Clear

- Last Updated : 23 Mar, 2022
    - **Read**
    - **Discuss**
    - **Courses**
    - **Practice**
    - **Video**

ıss accepts more than one value in tailwind CSS. All the properties are covered as in class form. It is the alternative to the **CSS clear property**. This class is used to specify which side of floating elements are not allowed to float. It sets or returns the position of the element in relation to floating objects. If the element can fit horizontally in the space next to another element that is floated, it will. Basically, it is used for controlling the wrapping of content around an element.

CSS Clear Classes:

- clear-left
- clear-right

- clear-both
- clear-none

clear-left: This class is used to specify that elements are not allowed to float on the left side in relation to another element.

Syntax:

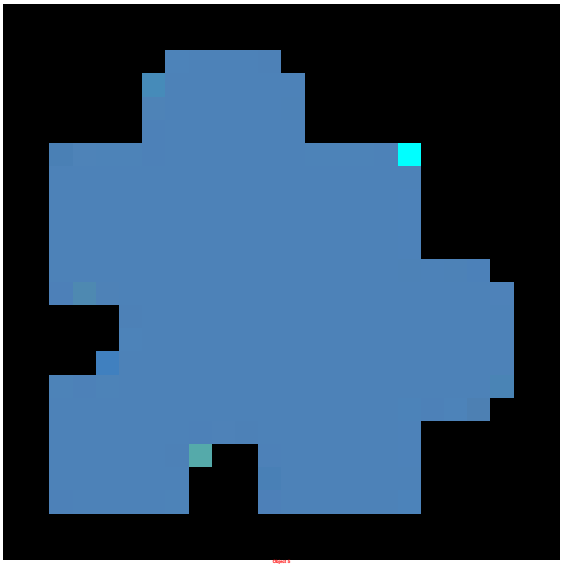

<element class="clear-left">...</element>

Example:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
 rel="stylesheet">
</head>

<body class="text-center">
<center>
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS clear Class</b>
```

```
    <div class="mx-10">
    <img class="float-left p-2 w-20 h-20"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
    <img class="float-right p-2"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
    <p class="text-justify clear-left">
      How many times were you frustrated while looking out
      for a good collection of programming/algorithm/interview
      questions? What did you expect and what did you get?
      This portal has been created to provide well written,
      well thought and well explained solutions for selected
      questions. An IIT Roorkee alumnus and founder of
      GeeksforGeeks. He loves to solve programming problems
      in most efficient ways. Apart from GeeksforGeeks, he
      has worked with DE Shaw and Co. as a software developer
      and JIIT Noida as an assistant professor.It is a good
      platform to learn programming. It is an educational
      website. Prepare for the Recruitment drive of product
      based companies like Microsoft, Amazon, Adobe etc with
      a free online placement preparation course.</p>

</center>
</body>

</html>
```

Output:

clear-right: This class is used to specify that elements are not allowed to float on the right side in relation to another element.

Syntax:

```
<element class="clear-right">...</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
     rel="stylesheet">
</head>

<body class="text-center">
<center>
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS clear Class</b>
    <div class="mx-10">
    <img class="float-left p-2 w-20 h-20"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
    <img class="float-right p-2"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
    <p class="text-justify clear-right">
      How many times were you frustrated while looking out
      for a good collection of programming/algorithm/interview
      questions? What did you expect and what did you get?
      This portal has been created to provide well written,
      well thought and well explained solutions for selected
      questions. An IIT Roorkee alumnus and founder of
      GeeksforGeeks. He loves to solve programming problems
      in most efficient ways. Apart from GeeksforGeeks, he
      has worked with DE Shaw and Co. as a software developer
      and JIIT Noida as an assistant professor.It is a good
      platform to learn programming. It is an educational
      website. Prepare for the Recruitment drive of product
      based companies like Microsoft, Amazon, Adobe etc with
      a free online placement preparation course.</p>
```

```
</center>
</body>

</html>
```

Output:

clear-both: This class used to specify that floating elements are not allowed to float on both sides.

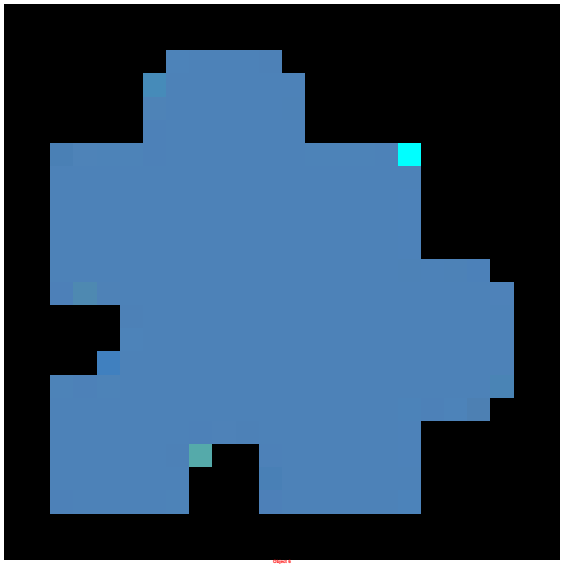

Syntax:

```
<element class="clear-both">...</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="text-center">
<center>
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS clear Class</b>
    <div class="mx-10">
    <img class="float-left p-2 w-20 h-20"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
    <img class="float-right p-2"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
    <p class="text-justify clear-both">
      How many times were you frustrated while looking out
      for a good collection of programming/algorithm/interview
      questions? What did you expect and what did you get?
      This portal has been created to provide well written,
      well thought and well explained solutions for selected
      questions. An IIT Roorkee alumnus and founder of
      GeeksforGeeks. He loves to solve programming problems
      in most efficient ways. Apart from GeeksforGeeks, he
      has worked with DE Shaw and Co. as a software developer
      and JIIT Noida as an assistant professor.It is a good
      platform to learn programming. It is an educational
      website. Prepare for the Recruitment drive of product
      based companies like Microsoft, Amazon, Adobe etc with
      a free online placement preparation course.</p>

</center>
</body>

</html>
```

Output:

clear-none: This class is used to specify the default value. It allows elements to float on both sides.

Syntax:

```
<element class="clear-none">...</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
    rel="stylesheet">
</head>

<body class="text-center">
<center>
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS clear Class</b>
    <div class="mx-10">
    <img class="float-left p-2 w-20 h-20"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
    <img class="float-right p-2"
```

```
          src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
     <p class="text-justify clear-none">
       How many times were you frustrated while looking out
       for a good collection of programming/algorithm/interview
       questions? What did you expect and what did you get?
       This portal has been created to provide well written,
       well thought and well explained solutions for selected
       questions. An IIT Roorkee alumnus and founder of
       GeeksforGeeks. He loves to solve programming problems
       in most efficient ways. Apart from GeeksforGeeks, he
       has worked with DE Shaw and Co. as a software developer
       and JIIT Noida as an assistant professor.It is a good
       platform to learn programming. It is an educational
       website. Prepare for the Recruitment drive of product
       based companies like Microsoft, Amazon, Adobe etc with
       a free online placement preparation course.</p>

</center>
</body>

</html>
```

Tailwind CSS Object Fit

- Last Updated : 23 Mar, 2022
  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts more than one value in tailwind CSS. All the properties are covered as in class form. It is the alternative to the CSS object-fit property. This class is used to specify how an image or video should be resized to fit its content box for controlling a replaced element’s content resizing.

Object fit Classes:

- object-contain
- object-cover

- object-fill
- object-none
- object-scale-down

object-contain: This class replaced image preserves the aspect ratio of the original image while fitting within the content box. Resize an element’s content to stay contained within its container.

Syntax:

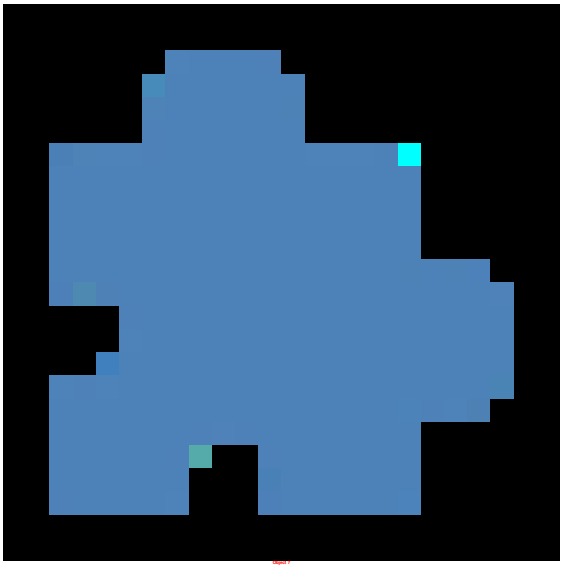

<element class="object-contain">...</element>

Example 1:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
     rel="stylesheet">
</head>

<body class="text-center">
<center>
    <h1 class="text-green-600 text-5xl font-bold">
```

```
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS object Class</b>
    <div class="bg-green-300 w-full h-full">
    <img class="object-contain h-48 w-full"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">

</center>
</body>

</html>
```

Output:

object-cover: This class preserves the aspect ratio of the original image as the replaced image while fitting in the content box. Sometimes it is clipped to fit when the aspect ratio of the original image doesn't match with the aspect ratio of the content box. Resize an element's content to cover its container using this class.

Syntax:

```
<element class="object-cover">...</element>
```

Example 2:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
    rel="stylesheet">
</head>

<body class="text-center">
<center>
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS object Class</b>
    <div class="bg-green-300 w-full h-full">
    <img class="object-cover h-48 w-full"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">

</center>
</body>

</html>
```

Output:

object-fill: This class replaced image is stretched to fit the content box. The replaced image will completely fill the box needless of its aspect ratio. Stretch an element’s content to fit its container using the class.

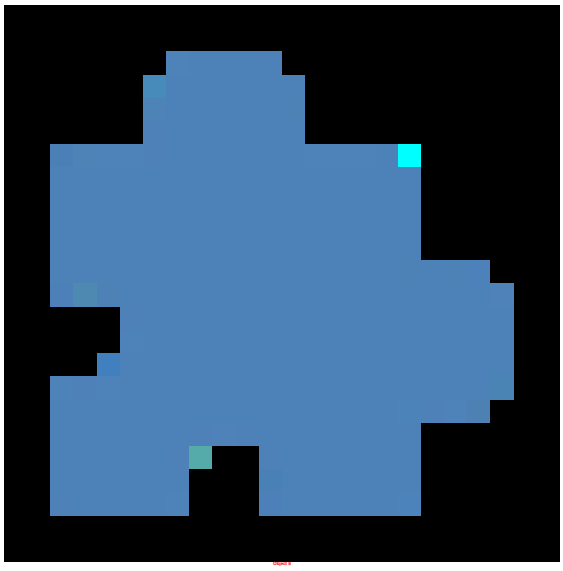

Syntax:

```
<element class="object-fill">...</element>
```

Example 3:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
    rel="stylesheet">
</head>

<body class="text-center">
<center>
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS object Class</b>
    <div class="bg-green-300 w-full h-full">
    <img class="object-fill h-48 w-full"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
```

```
GFG115.png">

</center>
</body>

</html>
```

Output:

object-none: In this class, the replaced image will ignore the aspect ratio of the original image. Hence, it is not resized. The class displays an element's content at its original size ignoring the container size.

Syntax:

```
<element class="object-none">...</element>
```

Example 4:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
           rel="stylesheet">
</head>

<body class="text-center">
<center>
```

```
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS object Class</b>
    <div class="bg-green-300 w-full h-full">
    <img class="object-none h-48 w-full"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">

</center>
</body>

</html>
```

Output:

object-scale-down: This class replaced image is resized as if none or contain were specified and results in the smallest object size. The class displays an element’s content at its original size but scale it down to fit its container.

Syntax:

```
<element class="object-scale-down">...</element>
```

Example 5:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
           rel="stylesheet">
</head>

<body class="text-center">
<center>
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS object Class</b>
    <div class="bg-green-300 w-full h-full">
    <img class="object-scale-down h-48 w-full"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">

</center>
</body>

</html>
```

Tailwind CSS Object Position

- Last Updated : 23 Mar, 2022

  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts more than one value in tailwind CSS. All the properties are covered as in class form. It is the alternative to the **CSS object-position property**. This class is used to specify, how an image or video element is positioned with x/y coordinates within its content box. It also controls the replacement of the element's content positioning within its container.

Object Position Classes:

- object-left-top: It is positioned at the left top of the image or video.
- object-top: It is positioned at the top of the image or video.
- object-right-top: It is positioned at the right top of the image or video.
- object-left: It is positioned on the left of the image or video.
- object-center: It is positioned at the center of the image or video.
- object-right: It is positioned to the right of the image or video.
- object-left-bottom: It is positioned at the left bottom of the image or video.
- object-bottom: It is positioned at the bottom of the image or video.
- object-right-bottom: It is positioned at the right-bottom of the image or video.

Note: All classes are used in the below example.

Example:

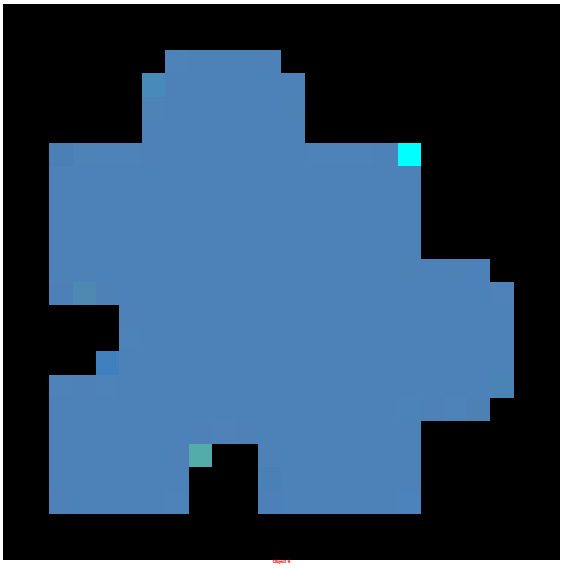

- HTML

```
<!DOCTYPE html>
<html>
  <head>
    <link
      href="https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
```

```
      rel="stylesheet">
  </head>

  <body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
      GeeksforGeeks
    </h1>
    <b>Tailwind CSS Object Position Class</b>
    <div class="bg-green-300
                 mx-16
                 space-y-4
                 p-2
                 justify-between
                 grid grid-rows-3
                 grid-flow-col">
      <img
        title="object-left-top"
        class="object-none object-left-top bg-gree-200 w-24 h-24
border-4 my-4"
        src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
      <img
        title="object-left"
        class="object-none object-left bg-gree-200 w-24 h-24 border-4"
        src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
      <img
        title="object-left-bottom"
        class="object-none object-left-bottom bg-gree-200 w-24 h-24
border-4"
        src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">

      <img
        title="object-top"
        class="object-none object-top bg-gree-200 w-24 h-24 border-4"
        src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
      <img
        title="object-center"
        class="object-none object-center bg-gree-200 w-24 h-24 border-
4"
        src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
      <img
        title="object-bottom"
        class="object-none object-bottom bg-gree-200 w-24 h-24 border-
```

```
4"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">

       <img
         title="object-right-top"
         class="object-none object-right-top bg-gree-200 w-24 h-24
border-4"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
       <img
         title="object-right"
         class="object-none object-right bg-gree-200 w-24 h-24 border-4"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">

       <img
         title="object-right-bottom"
         class="object-none object-right-bottom bg-gree-200 w-24 h-24
border-4"
         src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
     </div>
   </body>
</html>
```

Tailwind CSS Object Position

- Last Updated : 23 Mar, 2022

  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts more than one value in tailwind CSS. All the properties are covered as in class form. It is the alternative to the **CSS object-position property**. This class is used to specify, how an image or video element is positioned with x/y coordinates within its content box. It also

controls the replacement of the element’s content positioning within its container.

Object Position Classes:

- object-left-top: It is positioned at the left top of the image or video.
- object-top: It is positioned at the top of the image or video.
- object-right-top: It is positioned at the right top of the image or video.
- object-left: It is positioned on the left of the image or video.
- object-center: It is positioned at the center of the image or video.
- object-right: It is positioned to the right of the image or video.
- object-left-bottom: It is positioned at the left bottom of the image or video.
- object-bottom: It is positioned at the bottom of the image or video.
- object-right-bottom: It is positioned at the right-bottom of the image or video.

Note: All classes are used in the below example.

Example:

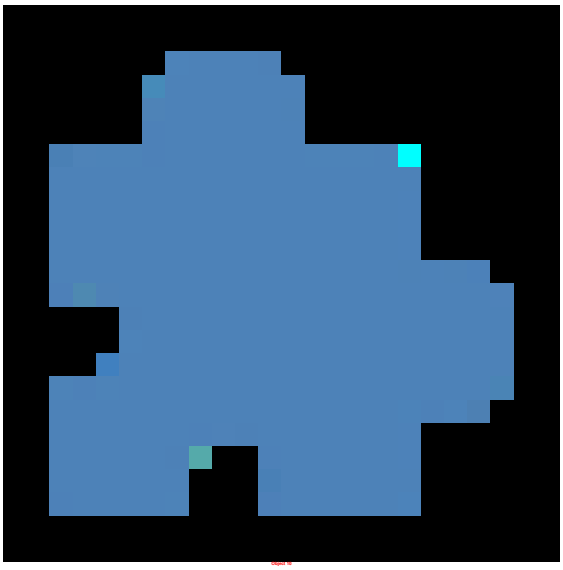

- HTML

```
<!DOCTYPE html>
<html>
  <head>
    <link
      href="https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
      rel="stylesheet">
  </head>

  <body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
      GeeksforGeeks
    </h1>
    <b>Tailwind CSS Object Position Class</b>
    <div class="bg-green-300
                 mx-16
                 space-y-4
                 p-2
                 justify-between
                 grid grid-rows-3
                 grid-flow-col">
      <img
        title="object-left-top"
        class="object-none object-left-top bg-gree-200 w-24 h-24
border-4 my-4"
        src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
      <img
        title="object-left"
        class="object-none object-left bg-gree-200 w-24 h-24 border-4"
        src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
      <img
        title="object-left-bottom"
        class="object-none object-left-bottom bg-gree-200 w-24 h-24
border-4"
        src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">

      <img
        title="object-top"
        class="object-none object-top bg-gree-200 w-24 h-24 border-4"
        src=
"https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/
GFG115.png">
      <img
        title="object-center"
```

```
        class="object-none object-center bg-gree-200 w-24 h-24 border-4"
        src="https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/GFG115.png">
      <img
        title="object-bottom"
        class="object-none object-bottom bg-gree-200 w-24 h-24 border-4"
        src="https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/GFG115.png">

      <img
        title="object-right-top"
        class="object-none object-right-top bg-gree-200 w-24 h-24 border-4"
        src="https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/GFG115.png">
      <img
        title="object-right"
        class="object-none object-right bg-gree-200 w-24 h-24 border-4"
        src="https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/GFG115.png">

      <img
        title="object-right-bottom"
        class="object-none object-right-bottom bg-gree-200 w-24 h-24 border-4"
        src="https://media.geeksforgeeks.org/wp-content/uploads/20190807114330/GFG115.png">
    </div>
  </body>
</html>
```

Tailwind CSS List Style Position

- Last Updated : 17 Feb, 2021

  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered as in class form. It is the alternative to the **CSS list-style-position Property**. This class specifies the position of the marker box with respect to the principal block box.

List Style Position classes:

- list-inside: In this value, the marker is the first element among the list item’s contents i.e the bullet points will be inside the list item.
- list-outside: In this value, the marker is outside the principal block box i.e the bullet points will be outside the list item. This is the default value.

Syntax:

```
<element class="List Style Position">...</element>
```

Example:

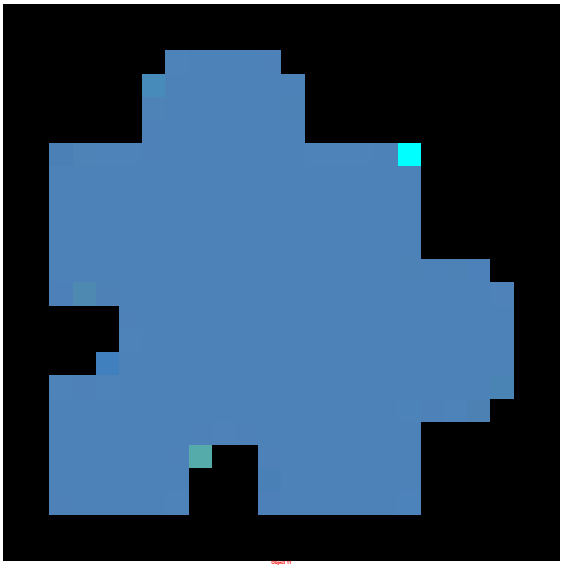

- HTML

```
<!DOCTYPE html>
```

```
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="text-center mx-4 space-y-2">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS List Style Position Class</b>
    <div class="mx-24 bg-green-200 text-justify">
        <ul class="list-disc list-inside ">
            <li>Self learning</li>
            <li>Contribute at Open Source</li>
            <li>Gain Stack overflow respect</li>
        </ul>
        <br>
        <ul class="list-disc list-outside ">
            <li>Self learning</li>
            <li>Contribute at Open Source</li>
            <li>Gain Stack overflow respect</li>
        </ul>
    </div>
</body>

</html>
```

Tailwind CSS List Style Type

- Last Updated : 23 Mar, 2022
    - **Read**
    - **Discuss**
    - **Courses**
    - **Practice**
    - **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered as in class form. It is the alternative to the **CSS List Style Type property**. This class specifies the appearance of the list item marker (such as a disc, character, or custom counter style) if the ‘list-style-image’ has the value ‘none’.

List Style Type classes:

- list-none: No marker is shown in this mode.
- list-disc: This is the default value. The marker is a filled circle.
- list-decimal: A marker is a decimal number, beginning with 1.

Syntax:

```
<element class="List Style Type">...</element>
```

Example:

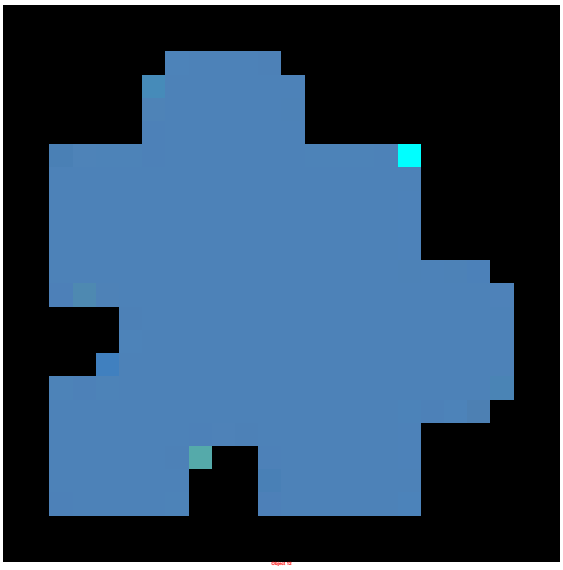

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="text-center mx-4 space-y-2">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS List Style Type Class</b>
```

```
    <div class="mx-24 bg-green-200 text-justify px-6">
        <ul class="list-disc">
            <li>Self learning</li>
            <li>Contribute at Open Source</li>
            <li>Gain Stack overflow respect</li>
        </ul>
        <br>
        <ol class="list-decimal">
            <li>Self learning</li>
            <li>Contribute at Open Source</li>
            <li>Gain Stack overflow respect</li>
        </ol>
        <br>
        <ul class="list-none">
            <li>Self learning</li>
            <li>Contribute at Open Source</li>
            <li>Gain Stack overflow respect</li>
        </ul>
    </div>
</body>

</html>
```

Tailwind CSS Grid Template Rows

- Last Updated : 23 Mar, 2022
    - **Read**
    - **Discuss**
    - **Courses**
    - **Practice**
    - **Video**

ıss accepts more than one value in tailwind CSS and all the properties are covered as in class form. It is the alternative of **CSS grid-template-row** property in CSS. It is used to set the number of rows and size of the rows of the grid, here we will do the same but for fast development of front-end. The number of rows is set by the number of values given to this class.

Grid Template Rows:

- grid-rows-1: Each row concedes only one row.

- grid-rows-2: Each row concedes only two rows.
- grid-rows-3: Each row concedes only three rows.
- grid-rows-4: Each row concedes only four rows.
- grid-rows-5: Each row concedes only five rows.
- grid-rows-6: Each row concedes six rows.
- grid-rows-none: Does not follow the grid-row property.

Syntax:

```
<element class="grid grid-rows-number"> Contents... </element>
```

Example 1:

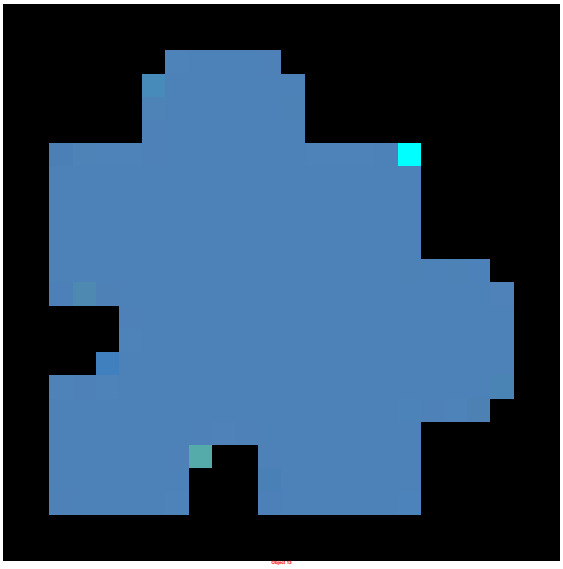

- HTML

```
<!DOCTYPE html>

<head>
    <title>Tailwind grid-rows Class</title>

    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>
```

```
<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>

    <b>Tailwind CSS grid-rows Class</b>

    <div id="main" class="grid grid-rows-3 grid-flow-col">
        <div class="bg-green-500 rounded-lg m-4 h-12">1</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">2</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">3</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">4</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">5</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">6</div>
    </div>
</body>

</html>
```

Output:

Example 2:

- HTML

```
<!DOCTYPE html>

<head>
    <title>Tailwind grid-rows Class</title>
```

```
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
           rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>

    <b>Tailwind CSS grid-rows Class</b>

    <div id="main" class="grid grid-rows-2 grid-flow-col">
        <div class="bg-green-500 rounded-lg m-4 h-12">1</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">2</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">3</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">4</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">5</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">6</div>
    </div>
</body>

</html>
```

Tailwind CSS Grid Auto Flow

- Last Updated : 23 Mar, 2022
    - **Read**
    - **Discuss**
    - **Courses**
    - **Practice**
    - **Video**

ıss accepts more than one value in tailwind CSS all the properties are covered as in class form. It is the alternative of **CSS grid-auto-flow property** and it is used to specify how auto-placed items get flowed into the grid items using Tailwind CSS.

Grid Auto Flow:

- grid-flow-row
- grid-flow-col
- grid-flow-row-dense
- grid-flow-col-dense

grid-flow-row: Auto-placement algorithm place the items by filling each row in turn, adding new rows as necessary.

Syntax:

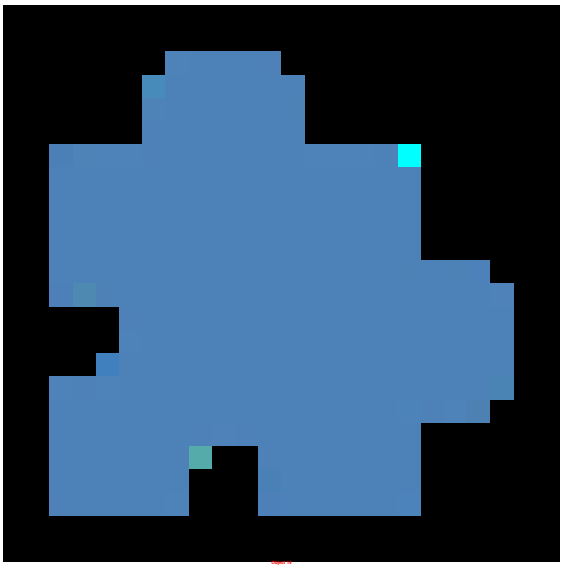

<element class="grid-flow-row"> Contents... </element>

Example:

- HTML

```
<!DOCTYPE html>
<html>

<head>
    <title>Tailwind grid-flow-row Class</title>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>
```

```
<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>

    <b>Tailwind CSS grid-flow-row Class</b>

    <div class = "m-8 grid grid-flow-row gap-1">
        <div class = "bg-green-300 rounded-lg">1</div>
        <div class = "bg-green-300 rounded-lg">2</div>
        <div class = "bg-green-300 rounded-lg">3</div>
        <div class = "bg-green-300 rounded-lg">4</div>
    </div>
</body>

</html>
```

Output:

grid-flow-col: Auto-placement algorithm place the items by filling each column in turn, adding new columns as necessary.

Syntax:

```
<element class="grid-flow-col"> Contents... </element>
```

Example:

- HTML

```html
<!DOCTYPE html>
<html>

<head>
    <title>Tailwind grid-flow-col Class</title>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>

    <b>Tailwind CSS grid-flow-col Class</b>

    <div class = "m-8 grid grid-flow-col gap-1">
        <div class = "bg-green-300 rounded-lg">1</div>
        <div class = "bg-green-300 rounded-lg">2</div>
        <div class = "bg-green-300 rounded-lg">3</div>
        <div class = "bg-green-300 rounded-lg">4</div>
    </div>
</body>

</html>
```

Tailwind CSS Grid Auto Rows

- Last Updated : 23 Mar, 2022
    - **Read**
    - **Discuss**
    - **Courses**
    - **Practice**
    - **Video**

ıss accepts more than one value in **tailwind CSS** in which all the properties are covered as in class form. It is the alternative to the **CSS grid-auto-rows property**. This class is used to specify the size for the

rows of implicitly generated grid containers. This class is used to utilities to control the size implicitly-created grid rows.

Grid Auto Rows classes:

1. auto-rows-auto
2. auto-rows-min
3. auto-rows-max
4. auto-rows-fr

auto-rows-auto: It is the default value. The size is determined implicitly according to the size of the container.

Syntax:

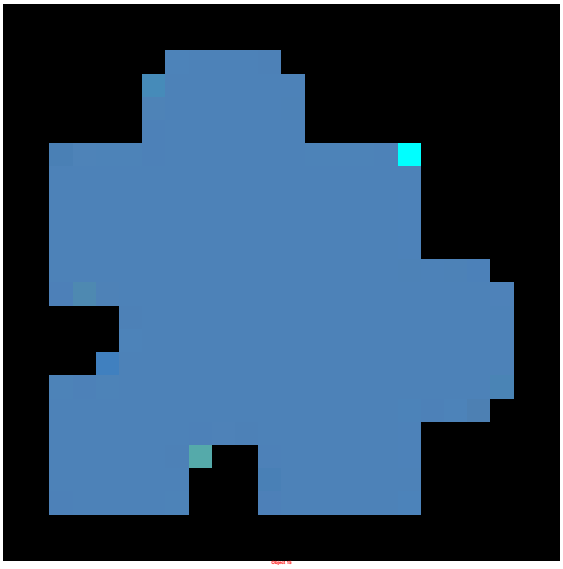

<element class="auto-rows-auto">..</element>

Example:

- HTML

```
<!DOCTYPE html>
<html>
    <head>
```

```
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>

    <b>Tailwind CSS Grid Auto Rows Class</b>
        <div class ="m-8 p-8 grid bg-green-600 grid-cols-2
                        grid-flow-row gap-4 auto-rows-auto">
            <div class = "p-4 bg-green-200">
                LiveScript Become JavaScript
            </div>
            <div class = "p-4 bg-green-200">
                HyperText Markup language

            </div>
            <div class = "p-4 bg-green-200">
                Bootstratp become replacement of CSS
            </div>
            <div class = "p-4 bg-green-200">
                Cascading Style Sheet
            </div>

        </div>
    </body>
</html>
```

Output:

auto-rows-min: It specifies the size depending on the smallest item in the container.

Syntax:

```
<element class="auto-rows-min">..</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<html>
    <head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>

    <b>Tailwind CSS Grid Auto Rows Class</b>
        <div class ="m-8 p-8 grid bg-green-600 grid-cols-2
                        grid-flow-row gap-4 auto-rows-min">
            <div class = "p-4 bg-green-200">
                LiveScript Become JavaScript
            </div>
            <div class = "p-4 bg-green-200">
                HyperText Markup language

            </div>
            <div class = "p-4 bg-green-200">
                Bootstratp become replacement of CSS
            </div>
            <div class = "p-4 bg-green-200">
                Cascading Style Sheet
            </div>

        </div>
    </body>
</html>
```

Output:

auto-rows-max: It specifies the size depending on the largest item in the container.

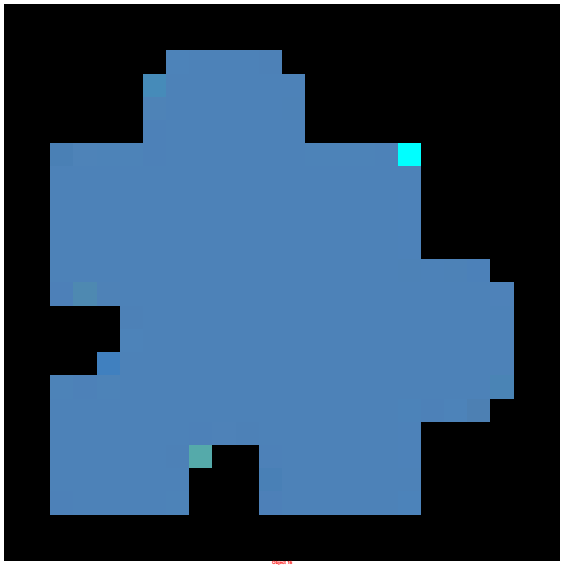

Syntax:

```
<element class="auto-rows-max">..</element>
```

Example:

- HTML

```
<!DOCTYPE html>
```

```html
<html>
    <head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>

    <b>Tailwind CSS Grid Auto Rows Class</b>
        <div class ="m-8 p-8 grid bg-green-600 grid-cols-2
                    grid-flow-row gap-4 auto-rows-max">
            <div class = "p-4 bg-green-200">
                LiveScript Become JavaScript
            </div>
            <div class = "p-4 bg-green-200">
                HyperText Markup language

            </div>
            <div class = "p-4 bg-green-200">
                Bootstratp become replacement of CSS
            </div>
            <div class = "p-4 bg-green-200">
                Cascading Style Sheet
            </div>

        </div>
    </body>
</html>
```

Output:

auto-rows-fr: It specifies the size in the range of [min, max] greater than or equal to *min* and less than or equal to *max*.

Syntax:

```
<element class="auto-rows-fr">..</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<html>
    <head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>

    <b>Tailwind CSS Grid Auto Rows Class</b>
        <div class ="m-8 p-8 grid bg-green-600 grid-cols-2
                        grid-flow-row gap-4 auto-rows-fr">
            <div class = "p-4 bg-green-200">
                LiveScript Become JavaScript
            </div>
            <div class = "p-4 bg-green-200">
```

```
                HyperText Markup language

            </div>
            <div class = "p-4 bg-green-200">
                Bootstratp become replacement of CSS
            </div>
            <div class = "p-4 bg-green-200">
                Cascading Style Sheet
            </div>

        </div>
    </body>
</html>
```

Tailwind CSS Justify Self

- Last Updated : 23 Mar, 2022
    - **Read**
    - **Discuss**
    - **Courses**
    - **Practice**
    - **Video**

ıss accepts two values in tailwind CSS. The different properties are covered in the class form. It is the alternative to the **CSS justify-self property**. This class is used to specify the alignment of a content's position along with the appropriate axis in a CSS Grid.

Justify self class options:

- justify-self-auto
- justify-self-start
- justify-self-end
- justify-self-center
- justify-self-stretch

justify-self-auto: It is the value used to align an item based on the value of the grid's *justify-items* class.

Syntax:

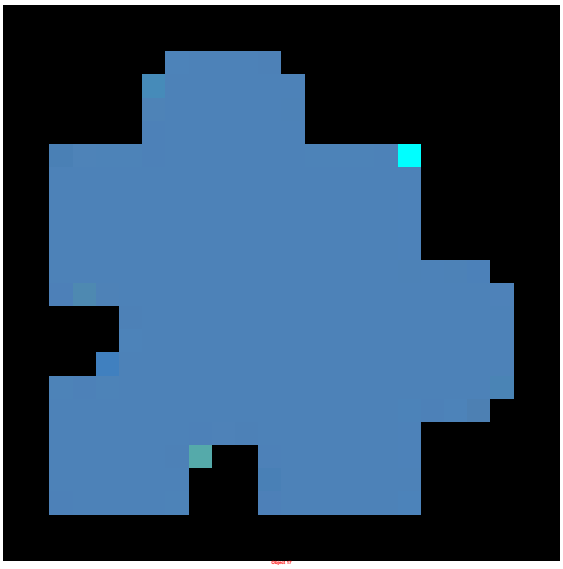

<element class="justify-self-auto">...</element>

Example:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Justify Self Class</b>
    <div id="main" class="grid justify-items-stretch grid-cols-2">
        <div class="justify-self-auto bg-green-500 rounded-lg m-4 h-
12">
          1
        </div>
        <div class="bg-green-500 rounded-lg m-4 h-12">2</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">3</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">4</div>
```

```
    </div>
</body>

</html>
```

Output:

justify-self-start: It allows the content to align itself to the left of the cell.

Syntax:

```
<element class="justify-self-start">...</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Justify Self Class</b>
```

```
    <div id="main" class="grid justify-items-stretch grid-cols-2">
        <div class="justify-self-start
            bg-green-500 rounded-lg m-4 h-12">1</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">2</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">3</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">4</div>
    </div>
</body>

</html>
```

Output:

justify-self-end: It allows the content to align itself to the right of the cell.

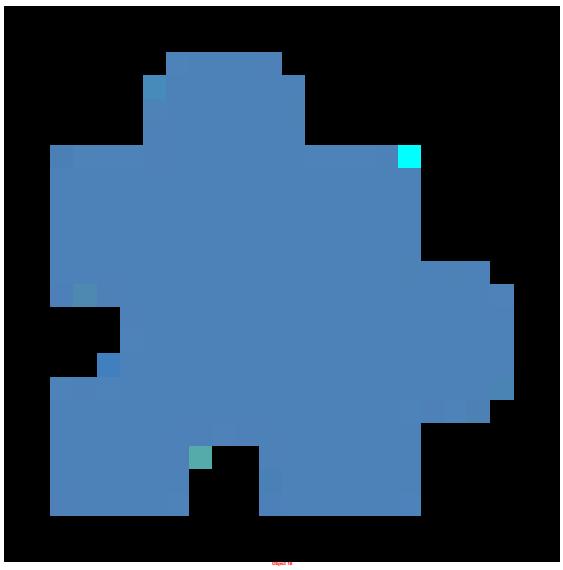

Syntax:

```
<element class="justify-self-end">...</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Justify Self Class</b>
    <div id="main" class="grid justify-items-stretch grid-cols-2">
        <div class="justify-self-end bg-green-500
            rounded-lg m-4 h-12">1</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">2</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">3</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">4</div>
    </div>
</body>

</html>
```

Output:

justify-self-center: It allows the content to align itself to the center of the cell.

Syntax:

```
<element class="justify-self-center">...</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Justify Self Class</b>
    <div id="main" class="grid justify-items-stretch grid-cols-2">
        <div class="justify-self-center bg-green-500
            rounded-lg m-4 h-12">1</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">2</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">3</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">4</div>
    </div>
</body>
```

```
</html>
```

Output:

justify-self-stretch: It is the default value of this property and it makes the content fill the whole width of the cell.

Syntax:

```
<element class="justify-self-stretch">...</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Justify Self Class</b>
    <div id="main" class="grid justify-items-stretch grid-cols-2">
        <div class="justify-self-stretch bg-green-500
            rounded-lg m-4 h-12">1</div>
```

```
        <div class="bg-green-500 rounded-lg m-4 h-12">2</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">3</div>
        <div class="bg-green-500 rounded-lg m-4 h-12">4</div>
    </div>
</body>

</html>
```

Tailwind CSS Border Collapse

- Last Updated : 23 Mar, 2022

  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered in class form. This class is used to set the borders of the cell present inside the table and tells whether these cells will share a common border or not. In CSS, we can do that by using **CSS border-collapse property**.

Syntax:

```
<element class="border-collapse">...</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">
</head>

<body class="text-center mx-4 space-y-2">
```

```
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Border Collapse Class</b>
    <div class="grid grid-flow-col text-center p-2">
        <table class="border-Collapse border border-green-900">
        <thead>
          <tr>
            <th class="border border-green-600">Frameworks</th>
            <th class="border border-green-600">Release Year</th>
          </tr>
        </thead>
        <tbody>
          <tr>
            <td class="border border-green-600">Tailwind CSS</td>
            <td class="border border-green-600">2019</td>
          </tr>
          <tr>
            <td class="border border-green-600">Bulma</td>
            <td class="border border-green-600">2016</td>
          </tr>
          <tr>
            <td class="border border-green-600">Bootstrap</td>
            <td class="border border-green-600">2011</td>
          </tr>
        </tbody>
        </table>
    </div>
</body>

</html>
```

Tailwind CSS Table Layout

- Difficulty Level : **Expert**
- Last Updated : 23 Mar, 2022

  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered in class form. By using this class we can set the display of the

layout of the table. In CSS, we do that by using the **CSS table-layout property**.

Table Layout classes:

- table-auto
- table-fixed

table-auto: This class is used to allow the table to automatically size columns to fit the contents of the cell.

Syntax:

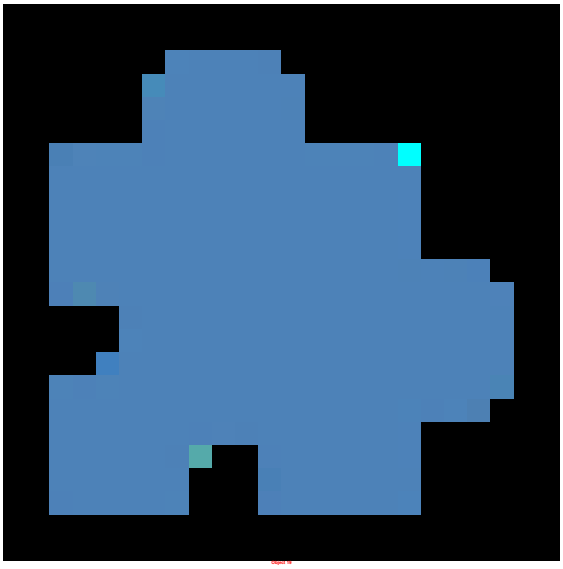

<element class="table-auto">...</element>

Example:

- HTML

```
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">
```

```
</head>

<body class="text-center mx-4 space-y-2">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Table Layout Class</b>
    <div class="bg-green-200">
        <table class="table-auto border-separate border border-green-
900">
        <thead>
          <tr>
            <th class="border border-green-600">Frameworks</th>
            <th class="border border-green-600">About</th>
          </tr>
        </thead>
        <tbody>
          <tr>
            <td class="border border-green-600">Tailwind CSS</td>
            <td class="border border-green-600">
                Tailwind CSS is a highly customizable,
                low-level CSS framework that gives you all
                of the building blocks
            </td>
          </tr>
          <tr>
            <td class="border border-green-600">Bulma</td>
            <td class="border border-green-600">
                Bulma CSS by @jgthms is just perfect.
                Simple, easily customizable and doesn't
                impose Javascript implementations.
            </td>
          </tr>
          <tr>
            <td class="border border-green-600">Bootstrap</td>
            <td class="border border-green-600">
                Bootstrap is a free and open-source CSS
                framework directed at responsive, mobile-first
                front-end web development.
            </td>
          </tr>
        </tbody>
        </table>
    </div>
</body>

</html>
```

Output:

table-fixed: This class is used to allow the table to ignore the content and use fixed widths for columns. The width of the first row will set the column widths for the whole table.

Syntax:

```
<element class="table-fixed">...</element>
```

Example:

- HTML

```
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">
</head>

<body class="text-center mx-4 space-y-2">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Table Layout Class</b>
    <div class="bg-green-200">
        <table class="table-fixed border-separate border border-green-
900">
        <thead>
          <tr>
            <th class="border border-green-600 w-1/4">Frameworks</th>
            <th class="border border-green-600 w-3/4">About</th>
          </tr>
        </thead>
        <tbody>
          <tr>
            <td class="border border-green-600">Tailwind CSS</td>
            <td class="border border-green-600">
                Tailwind CSS is a highly customizable,
                low-level CSS framework that gives you all
                of the building blocks
            </td>
          </tr>
          <tr>
```

```
            <td class="border border-green-600">Bulma</td>
            <td class="border border-green-600">
                Bulma CSS by @jgthms is just perfect.
                Simple, easily customizable and doesn't
                impose Javascript implementations.
            </td>
          </tr>
          <tr>
            <td class="border border-green-600">Bootstrap</td>
            <td class="border border-green-600">
                Bootstrap is a free and open-source CSS
                framework directed at responsive, mobile-first
                front-end web development.
            </td>
          </tr>
        </tbody>
        </table>
    </div>
</body>

</html>
```

Tailwind CSS Transition Property

- Last Updated : 23 Mar, 2022
  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered in class form. The transition-property class is used to specify the name of the CSS property for which the transition effect will occur. In CSS, we have done that by using the **CSS transition-property**.

Transition Property classes:

- transition-none: This value is used to specify that no class will get a transition effect.

- transition-all: All the class will get a transition effect. This is also the default value for this class.
- transition: We can specify the names of CSS properties for which transition effect will be applied. We can also specify multiple properties by separating them with a comma.
- transition-colors: This value is used to specify that the color class will get a transition effect.
- transition-opacity: This value is used to specify that the opacity class will get a transition effect.
- transition-shadow: This value is used to specify that the shadow class will get a transition effect.
- transition-transform: This value is used to specify that the transformation into a defined shape.

Syntax:

```
<element class="transition-{properties}">...</element>
```

Example:

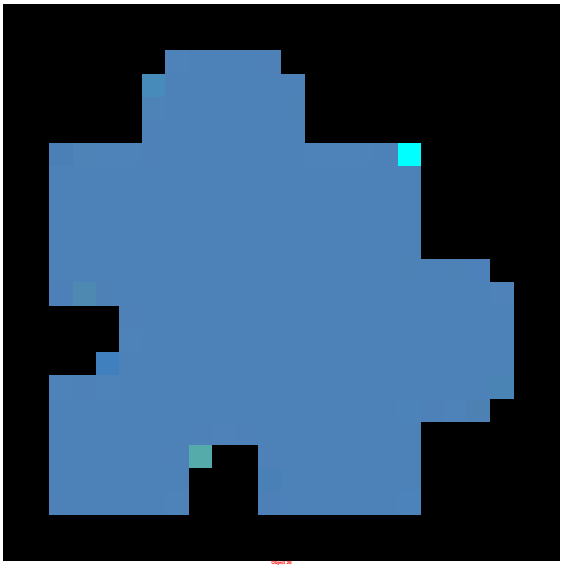

- HTML

```html
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">
</head>

<body class="text-center mx-4 space-y-2">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Transition Property Class</b>
    <div class="bg-green-200 m-8 grid grid-flow-col gap-4 p-5">
        <button class="transition duration-500 ease-in-out
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me
        </button>
        <button class="transition-opacity duration-500 ease-in-out
                        bg-green-300 hover:opacity-75 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me
        </button>
        <button class="transition-none duration-500 ease-in-out
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me
        </button>
        <button class="transition-colors duration-500 ease-in-out
                        bg-green-300 hover:bg-yellow-600 transform
                        hover:scale-110 rounded-lg p-4 border
                        border-green-900 hover:border-black">
            Hover me
        </button>
    </div>
</body>

</html>
```

Tailwind CSS Transition Duration

- Last Updated : 23 Mar, 2022

  - **Read**

- **Discuss**
- **Courses**
- **Practice**
- **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered in class form. The transition-duration class is used to specify the length of time (in seconds or milliseconds) to complete the transition effect. In CSS, we have done that by using the **CSS transition-duration**.

Transition Duration classes:

- duration-75: This class is used to take the transition time of 75ms.
- duration-100: This class is used to take the transition time of 100ms.
- duration-150: This class is used to take the transition time of 150ms.
- duration-200: This class is used to take the transition time of 200ms.
- duration-300: This class is used to take the transition time of 300ms.
- duration-500: This class is used to take the transition time of 500ms.
- duration-700: This class is used to take the transition time of 700ms.
- duration-1000: This class is used to take the transition time of 1000ms.

Syntax:

```
<element class="duration-{amount}">...</element>
```

Example:

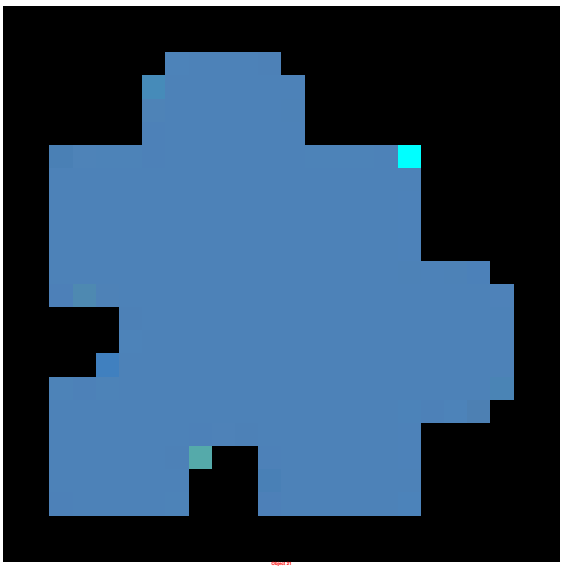

- HTML

```
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">
</head>

<body class="text-center mx-4 space-y-2">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Transition Duration Class</b>
    <div class="bg-green-200 m-8 grid grid-flow-col gap-4 p-5">
        <button class="transition duration-75 ease-in-out
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me
        </button>
        <button class="transition duration-100 ease-in-out
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me
        </button>
        <button class="transition duration-500 ease-in-out
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me
        </button>
```

```
        <button class="transition duration-1000 ease-in-out
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me
        </button>
    </div>
</body>

</html>
```

Tailwind CSS Transition Timing Function

- Last Updated : 23 Mar, 2022
    - **Read**
    - **Discuss**
    - **Courses**
    - **Practice**
    - **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered in class form. The transition timing function class is used to specify the time an animation uses to change from one set of CSS transitions to another. In CSS, we have done that by using the **CSS transition-timing-function.**

Transition timing function classes:

- ease-linear: In this, the animation has the same speed from start to end.
- ease-in: This is similar to easing where the end of the animation is fast.
- ease-out: This is similar to easing where the start of the animation is fast.
- ease-in-out: This sets the class to its default value.

Syntax:

```
<element class="ease-{timing}">...</element>
```

Example:

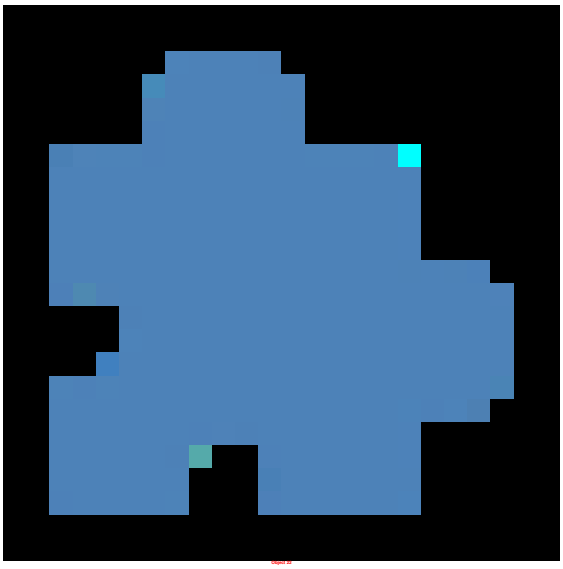

- HTML

```
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">
</head>

<body class="text-center mx-4 space-y-2">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Transition Timing Function Class</b>
    <div class="bg-green-200 m-8 grid grid-flow-col gap-4 p-5">
        <button class="transition duration-700 ease-in
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me for ease-in
        </button>
        <button class="transition duration-700 ease-out
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me for ease-out
```

```
        </button>
        <button class="transition duration-700 ease-in-out
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me for ease-in-out
        </button>
        <button class="transition duration-700 ease-linear
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me for ease-linear
        </button>
    </div>
</body>
</html>
```

Tailwind CSS Transition Delay

- Last Updated : 23 Mar, 2022
    - **Read**
    - **Discuss**
    - **Courses**
    - **Practice**
    - **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered as in class form. The transition delay class is used to specify the length of time (in seconds or milliseconds) to start the transition effect. In CSS, we have done that by using the **CSS transition-delay**.

Transition Delay classes:

- delay-75: This class is used to start the transition time of 75ms.
- delay-100: This class is used to start the transition time of 100ms.
- delay-150: This class is used to start the transition time of 150ms.
- delay-200: This class is used to start the transition time of 200ms.
- delay-300: This class is used to start the transition time of 300ms.
- delay-500: This class is used to start the transition time of 500ms.
- delay-700: This class is used to start the transition time of 700ms.

- delay-1000: This class is used to start the transition time of 1000ms.

Syntax:

```
<element class="delay-{amount}">...</element>
```

Example:

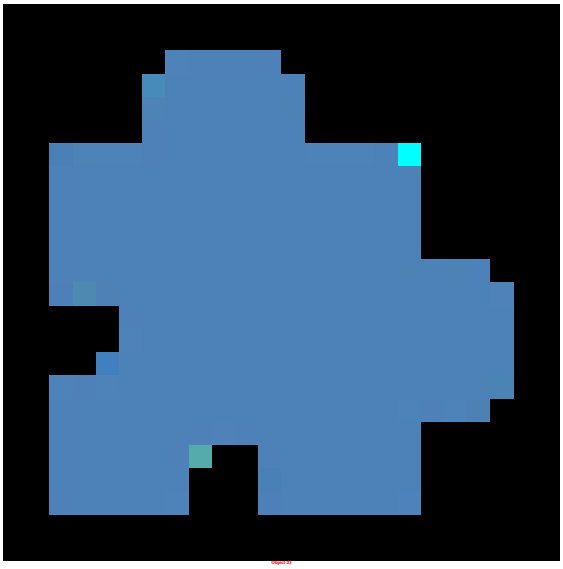

- HTML

```
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">
</head>

<body class="text-center mx-4 space-y-2">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Transition Delay Class</b>
    <div class="bg-green-200 m-8 grid grid-flow-col gap-4 p-5">
        <button class="transition delay-75 ease-in-out
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me
```

```
        </button>
        <button class="transition delay-100 ease-in-out
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me
        </button>
        <button class="transition delay-500 ease-in-out
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me
        </button>
        <button class="transition delay-1000 ease-in-out
                        bg-green-300 hover:bg-green-600 transform
                        hover:-translate-y-1 hover:scale-110
                        rounded-lg p-4 border border-green-900">
            Hover me
        </button>
    </div>
</body>

</html>
```

Tailwind CSS Transform

- Last Updated : 23 Mar, 2022

  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered in class form. This class is used to control the transform behavior of any element. In CSS, we can do that by using the **CSS transform property**.

Transform Classes:

- transform: To perform any transformation you have to use this class.

- transform-gpu: By using this class the transformation will be executed on GPU on CPU that will perform in a more soothing way.
- transform-none: This class is used to deactivate the transformation effect.

Syntax:

```
<element class="transform-{trans-on}">...</element>
```

Example:

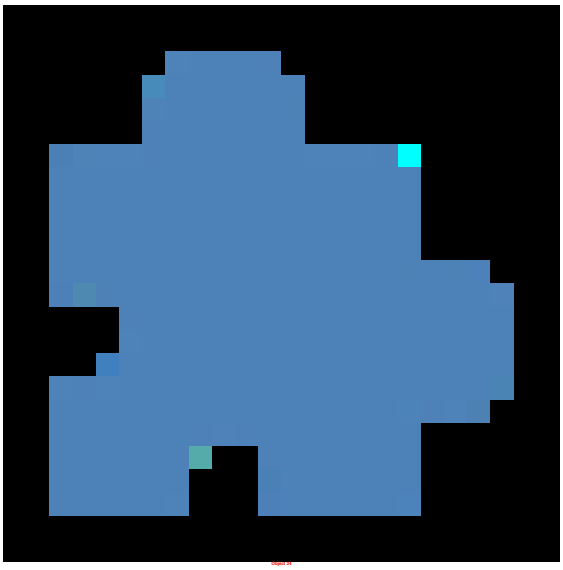

- HTML

```
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
    rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Transform Class</b>
    <div class="bg-green-300
```

```
                  mx-16
                  space-y-4
                  p-2
                  justify-between
                  grid grid-rows-1
                  grid-flow-col">

     <div title="bg-left-top"
         class="bg-no-repeat
                w-16 h-16
                my-4 transform skew-y-12"
         style=
         "background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
     </div>
     <div title="bg-left"
         class="bg-no-repeat
                w-16 h-16
                my-4 transform rotate-45"
         style=
         "background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
     </div>
     <div title="bg-left-bottom"
         class="bg-no-repeat
                w-16 h-16
                my-4 transform scale-50"
         style="background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
     </div>
     <div title="bg-left-bottom"
         class="bg-no-repeat
                w-16 h-16
                my-4 transform translate-x-4 translate-y-4"
         style="background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
     </div>
     </div>
</body>
</html>
```

Tailwind CSS Transform Origin

- Last Updated : 23 Mar, 2022

    - **Read**

- **Discuss**
- **Courses**
- **Practice**
- **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered in class form. This class is used to specify the origin of the rotation of an element. It is the point about which an element is rotated. It can be used for both 2D and 3D rotations. In CSS, we can do that by using the **CSS transform-origin property**.

Transform Origin classes:

- origin-center: This class is used to set the element’s origin as center.
- origin-top: This class is used to set the element’s origin as top.
- origin-top-right: This class is used to set the element’s origin as top-right.
- origin-right: This class is used to set the element’s origin as right.
- origin-bottom-right: This class is used to set the element’s origin as bottom-right.
- origin-bottom: This class is used to set the element’s origin as bottom.
- origin-bottom-left: This class is used to set the element’s origin as bottom-left.
- origin-left: This class is used to set the element’s origin as left.
- origin-top-left: This class is used to set the element’s origin as top-left.

Syntax:

```
<element class="origin-{keyword}">...</element>
```

Example:

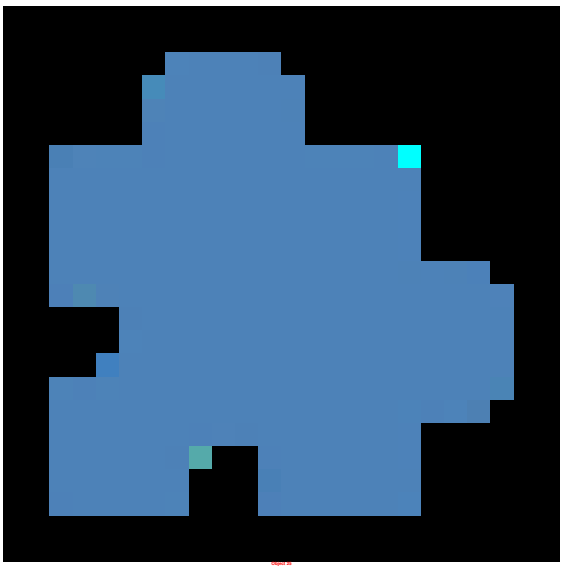

- HTML

```
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
    rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
       GeeksforGeeks
    </h1>
    <b>Tailwind CSS Transform Origin Class</b>
    <div class="bg-green-300
                mx-16
                p-4
                justify-between
                grid grid-flow-col">
    <div class="bg-yellow-500 w-16 h-16">
    <div class="bg-no-repeat
                w-16 h-16 origin-center
                transform rotate-45"
        style=
        "background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
    </div>
    </div>
    <div class="bg-yellow-500 w-16 h-16">
    <div class="bg-no-repeat
                w-16 h-16 origin-top-left
                transform rotate-45"
```

```
        style=
        "background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
    </div>
    </div>
    <div class="bg-yellow-500 w-16 h-16">
    <div class="bg-no-repeat
                w-16 h-16 origin-bottom-right
                transform rotate-45"
        style="background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
    </div>
    </div>
    <div class="bg-yellow-500 w-16 h-16">
    <div class="bg-no-repeat
                w-16 h-16 origin-left
                transform rotate-45"
        style="background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
    </div>
    </div>
    </div>
</body>
</html>
```

Tailwind CSS Rotate

- Last Updated : 23 Mar, 2022

  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered in class form. This class is used to rotate an element based on the given angle as an argument. The angle can be set in terms of degrees, radians, or turns. In CSS, we can do that by using the **CSS rotate() function**.

Rotate classes:

- rotate-0: This class is for no rotation.
- rotate-1: This class is used to rotate 1 degree clockwise.
- rotate-2: This class is used to rotate 2 degrees clockwise.
- rotate-3: This class is used to rotate 3 degrees clockwise.
- rotate-6: This class is used to rotate 6 degrees clockwise.
- rotate-12: This class is used to rotate 12 degrees clockwise.
- rotate-45: This class is used to rotate 45 degrees clockwise.
- rotate-90: This class is used to rotate 90 degrees clockwise.
- rotate-180: This class is used to rotate 180 degrees clockwise.
- -rotate-1: This class is used to rotate 1 degree anti-clockwise.
- -rotate-2: This class is used to rotate 2 degrees anti-clockwise.
- -rotate-3: This class is used to rotate 3 degrees anti-clockwise.
- -rotate-6: This class is used to rotate 6 degrees anti-clockwise.
- -rotate-12: This class is used to rotate 12 degrees anti-clockwise.
- -rotate-45: This class is used to rotate 45 degrees anti-clockwise.
- -rotate-90: This class is used to rotate 90 degrees anti-clockwise.
- -rotate-180: This class is used to rotate 180 degrees anti-clockwise.

Syntax:

```
<element class="rotate-{degree}">...</element>
```

Example:

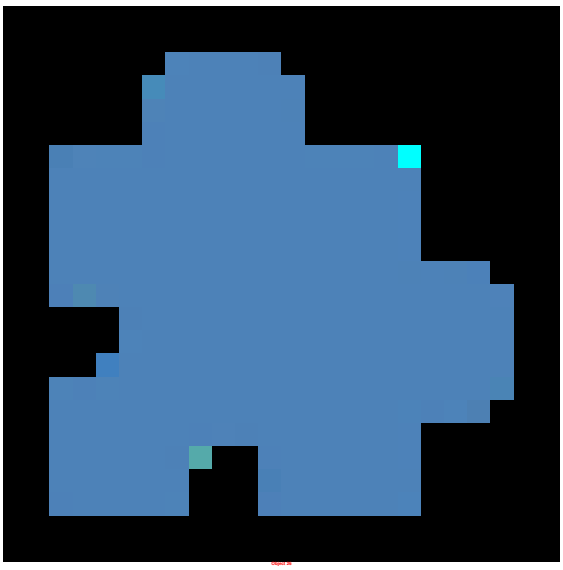

- HTML

```
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
    rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
       GeeksforGeeks
    </h1>
    <b>Tailwind CSS Rotate Class</b>
    <div class="bg-green-300
                mx-16
                p-4
                justify-between
                grid grid-flow-col">
    <div class="bg-no-repeat
                w-16 h-16 transform rotate-0"
        style=
        "background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
    </div>
    <div class="bg-no-repeat
                w-16 h-16 transform rotate-45"
        style=
        "background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
    </div>
    <div class="bg-no-repeat
```

```
                  w-16 h-16 transform rotate-90"
         style="background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
     </div>
     <div class="bg-no-repeat
                  w-16 h-16 transform rotate-180"
         style="background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
     </div>
     </div>
</body>
</html>
```

Tailwind CSS Translate

- Last Updated : 23 Mar, 2022

  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered in class form. This class is used to translating elements with transform. In CSS, we have done that by using the **CSS translate() function**.

Translate Classes:

- translate-x-{amount}: This class holds the length of translation corresponding to the x-axis.
- -translate-x-{amount}: This parameter holds the length of translation corresponding to the reverse x-axis.
- translate-y-{amount}: This parameter holds the length of translation corresponding to the y-axis.
- -translate-y-{amount}: This parameter holds the length of translation corresponding to the reverse y-axis.

Note: Amount totally depends on your choices, you can set it as full as percentage, or directly put the rem value.

Syntax:

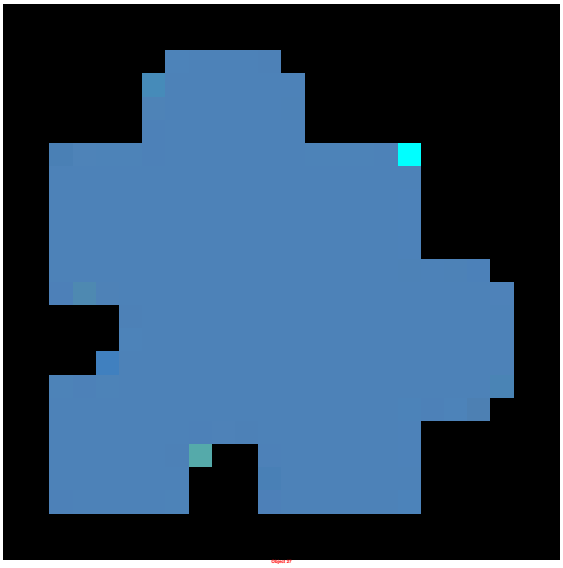

<element class="translate-{axis}-{amount}">...</element>

Example:

- HTML

```
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
    rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Translate Class</b>
    <div class="bg-green-300
                mx-16
                p-4
                justify-between
```

```
                grid grid-flow-col">
    <div class="bg-no-repeat
                w-16 h-16 transform translate-x-16"
        style=
        "background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
    </div>
    <div class="bg-no-repeat
                w-16 h-16 transform translate-y-16"
        style=
        "background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
    </div>
    <div class="bg-no-repeat
                w-16 h-16 transform -translate-x-16"
        style="background-image:url(

    </div>
    <div class="bg-no-repeat
                w-16 h-16 transform -translate-y-16"
        style="background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
    </div>
    </div>
</body>
</html>
```

Tailwind CSS Transform Origin

- Last Updated : 23 Mar, 2022
    - **Read**
    - **Discuss**
    - **Courses**
    - **Practice**
    - **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered in class form. This class is used to specify the origin of the rotation of an element. It is the point about which an element is rotated. It can be used for both 2D and 3D rotations. In CSS, we can do that by using the **CSS transform-origin property**.

Transform Origin classes:

- origin-center: This class is used to set the element’s origin as center.
- origin-top: This class is used to set the element’s origin as top.
- origin-top-right: This class is used to set the element’s origin as top-right.
- origin-right: This class is used to set the element’s origin as right.
- origin-bottom-right: This class is used to set the element’s origin as bottom-right.
- origin-bottom: This class is used to set the element’s origin as bottom.
- origin-bottom-left: This class is used to set the element’s origin as bottom-left.
- origin-left: This class is used to set the element’s origin as left.
- origin-top-left: This class is used to set the element’s origin as top-left.

Syntax:

```
<element class="origin-{keyword}">...</element>
```

Example:

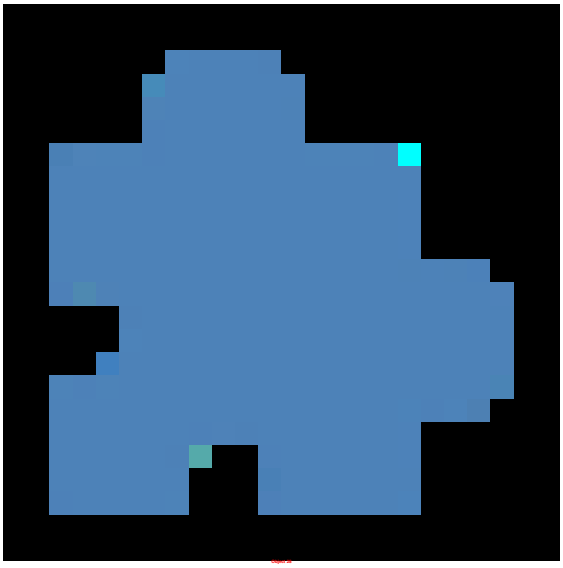

- HTML

```
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
    rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
       GeeksforGeeks
    </h1>
    <b>Tailwind CSS Transform Origin Class</b>
    <div class="bg-green-300
                 mx-16
                 p-4
                 justify-between
                 grid grid-flow-col">
    <div class="bg-yellow-500 w-16 h-16">
    <div class="bg-no-repeat
                 w-16 h-16 origin-center
                 transform rotate-45"
        style=
        "background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
    </div>
    </div>
    <div class="bg-yellow-500 w-16 h-16">
    <div class="bg-no-repeat
                 w-16 h-16 origin-top-left
                 transform rotate-45"
        style=
        "background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
    </div>
    </div>
    <div class="bg-yellow-500 w-16 h-16">
    <div class="bg-no-repeat
                 w-16 h-16 origin-bottom-right
                 transform rotate-45"
        style="background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
    </div>
    </div>
    <div class="bg-yellow-500 w-16 h-16">
```

```
    <div class="bg-no-repeat
                  w-16 h-16 origin-left
                  transform rotate-45"
        style="background-image:url(
https://media.geeksforgeeks.org/wp-content/uploads/20210222211217/
Screenshot20210222211207.png)">
    </div>
    </div>
    </div>
</body>
</html>
```

Tailwind CSS Fill

- Last Updated : 22 Mar, 2021

  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered in class form. This class is a presentation attribute used to set the color of an SVG shape. In CSS, we have done that by using the **CSS fill property**.

FIll class:

- fill-current: This class is used to set the fill color of an SVG to the current text color. This makes it easy to set an element's fill color by combining this class with an existing text color utility.

Syntax:

```
<svg class="fill-current">...</svg>
```

Example:

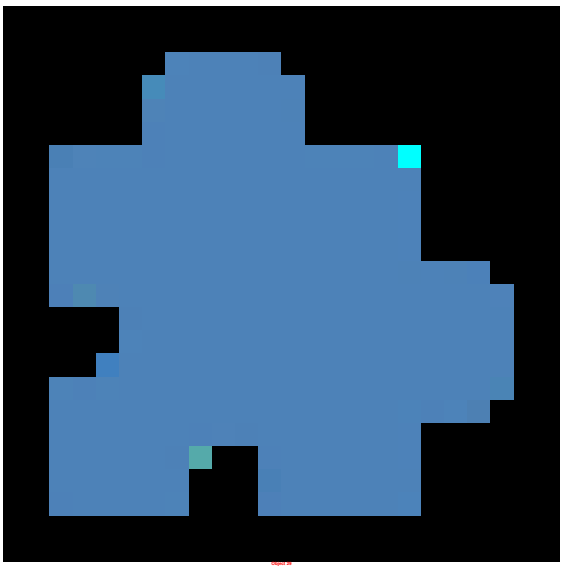

- HTML

```
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">
</head>

<body class="text-center mx-4 space-y-2">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Fill Class</b>
    <div class="bg-green-200 m-4 grid grid-flow-col gap-4 p-5">
        <svg height="150px" width="600px"
          xmlns="http://www.w3.org/2000/svg"
          version="1.1">
         <circle class="fill-current text-red-600" cx="100"
                cy="100" r="50" />
         <circle class="fill-current text-green-600" cx="250"
                cy="100" r="50" />
          <circle class="fill-current text-blue-600" cx="400"
                cy="100" r="50" />
          <circle class="fill-current text-yellow-600" cx="550"
                cy="100" r="50" />
         </svg>
    </div>
</body>

</html>
```

- CSS-Questions
- CSS-Quiz 1
- CSS-Quiz 2
- CSS-Quiz 3
- CSS-Tutorial
- Web Development
- Web-Technology

Write an Article

- Write an Interview Experience
- Tailwind CSS
- Introduction to Tailwind CSS

Tailwind CSS Layout

Tailwind CSS Flexbox

Tailwind CSS Grid

Tailwind CSS Alignment

- **Tailwind CSS Justify Content**
- Tailwind CSS Justify Items
- Tailwind CSS Justify Self
- Tailwind CSS Align Content
- Tailwind CSS Align Items
- Tailwind CSS Align Self
- Tailwind CSS Place Content
- Tailwind CSS Place Items
- Tailwind CSS Place Self

Tailwind CSS Spacing

Tailwind CSS Sizing

Tailwind CSS Typography

Tailwind CSS Backgrounds

Tailwind CSS Borders

Tailwind CSS Effects

Tailwind Filters

Tailwind CSS Tables

Tailwind CSS Transitions and Animation

Tailwind CSS Transforms

Tailwind CSS Interactivity

Tailwind CSS SVG



Object 30

Tailwind CSS Justify Content

- Last Updated : 23 Mar, 2022

- **Read**
- **Discuss**
- **Courses**
- **Practice**
- **Video**

s accepts two values in tailwind CSS. It is the alternative to the **CSS justify-content property**. This class is used to describe the alignment of the flexible box container. It contains the space between and around content items along the main axis of a flex container. It is basically used for controlling how flex and grid items are positioned along a container's main axis.

Justify Content classes:

- justify-start
- justify-end
- justify-center
- justify-between
- justify-around
- justify-evenly

justify-start: It is used to align flex items from the start of the container.

Tailwind CSS Flex Direction

- Difficulty Level : **Basic**
- Last Updated : 23 Mar, 2022

- **Read**
- **Discuss**
- **Courses**
- **Practice**
- **Video**

S **flexbox** is a vital feature to develop the frontend, there are four directions available in CSS so in **tailwind CSS** all the properties are covered as in class form. It is the alternative of **CSS flex-direction Property** for fast development of front-end.

Note: To activate the flex-direction you have to include the flex class in your element before the flex-direction class.

Flex Direction:

- flex-row
- flex-row-reverse
- flex-col
- flex-col-reverse

flex-row: It arranges the row the same as the text direction. The default value of flex-direction is a row. It is used to specify that the item has a normal text direction. It makes the item follow the normal text direction in lines.

Syntax:

```
<element class="flex flex-row"> Contents... </element>
```

Example:

- HTML

```
<!DOCTYPE html>

<head>
    <title>Tailwind flex-row Class</title>

    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="text-center">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
```

```
    <b>Tailwind CSS flex-row Class</b>

    <div id="main" class="flex flex-row justify-evenly">
        <div class="bg-green-900 w-24 h-12">1</div>
        <div class="bg-green-800 w-24 h-12">2</div>
        <div class="bg-green-700 w-24 h-12">3</div>
        <div class="bg-green-600 w-24 h-12">4</div>
        <div class="bg-green-500 w-24 h-12">5</div>
        <div class="bg-green-400 w-24 h-12">6</div>
    </div>
</body>

</html>
```

Tailwind CSS Font Family

- Last Updated : 23 Mar, 2022
    - **Read**
    - **Discuss**
    - **Courses**
    - **Practice**
    - **Video**

ıss accepts a lot of font names in **tailwind CSS** in which all the properties are covered in class form. It is the alternative to the **CSS font-family property**. This class is used to specify the font of an element. It can have multiple fonts as a backup system i.e. if the browser does not support one font then the other can be used.

Font family classes:

- font-sans
- font-serif
- font-mono

font-sans: This class is used to apply a websafe *sans-serif* font family, like *ui-sans-serif*, *system-ui*, *-apple-system*, *BlinkMacSystemFont*, “*Segoe*

UI“, *Roboto*, “*Helvetica Neue*“, *Arial*, “*Noto Sans*“, *sans-serif*, “*Apple Color Emoji*“, “*Segoe UI Emoji*“, “*Segoe UI Symbol*“, “*Noto Color Emoji*“, etc.

Syntax:

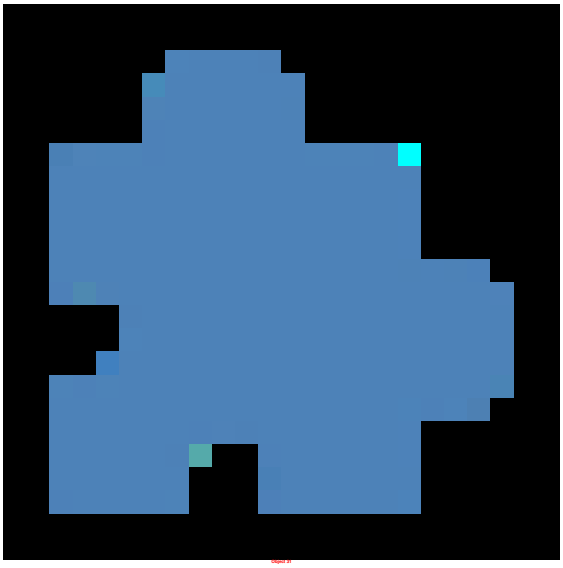

<element class="font-sans">...</element>

Example:

- HTML

```
<!DOCTYPE html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
          rel="stylesheet">
</head>

<body class="text-center mx-4 space-y-2">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Font Family Class</b>
    <div class="mx-24 bg-green-200">
        <p class="font-sans p-4">
            Geeksforgeeks: A Computer Science portal for Geeks
        </p>
```

```
    </div>
</body>

</html>
```

Tailwind CSS Outline

- Last Updated : 09 Dec, 2022
  - **Read**
  - **Discuss**
  - **Courses**
  - **Practice**
  - **Video**

ıss accepts lots of value in **tailwind CSS** in which all the properties are covered as in class form. This class is used to control an element's outline.

Outline Classes:

- outline-none: This class is used to hide the default browser outline on focused elements.
- outline-white: This class is used to add a white 2px dotted border around an element with a 2px offset.
- outline-black: This class is used to add a black 2px dotted border around an element with a 2px offset.

Syntax:

```
<element class="outline-{style}">...</element>
```

Example:

- HTML

```html
<!DOCTYPE html>
<html>
<head>
    <link href=
"https://unpkg.com/tailwindcss@^1.0/dist/tailwind.min.css"
        rel="stylesheet">
</head>

<body class="text-center mx-4 space-y-2">
    <h1 class="text-green-600 text-5xl font-bold">
        GeeksforGeeks
    </h1>
    <b>Tailwind CSS Outline Class</b>
    <div class="mx-6 bg-green-200 grid grid-rows-3
                 grid-flow-col text-justify p-4">

        <input class="placeholder-gray-500 p-3 m-2 rounded-lg
                     border-2 border-green-400 bg-green-100
                     focus:outline-none"
               placeholder="Outline-none">
        <input class="placeholder-gray-500 p-3 m-2 rounded-lg
                       border-2 border-green-400 bg-green-100
                       focus:outline-white"
               placeholder="Outline-white">

        <input class="placeholder-gray-500 p-3 m-2 rounded-lg
                     border-2 border-green-400 bg-green-100
                     focus:outline-black"
               placeholder="Outline-black">
    </div>
</body>

</html>
```