

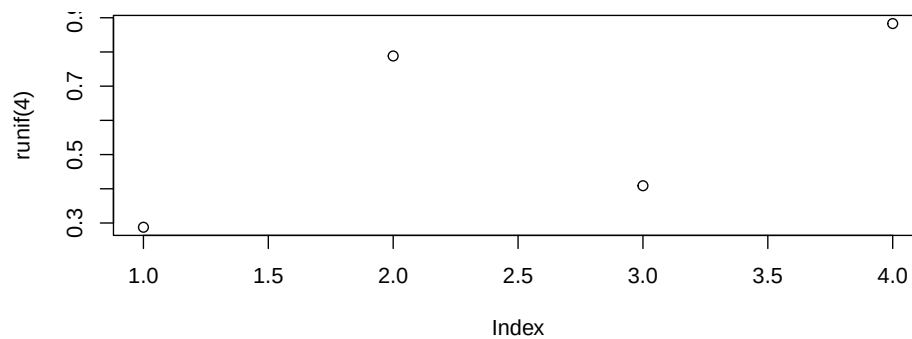


Figure 1: 2×2 is 4

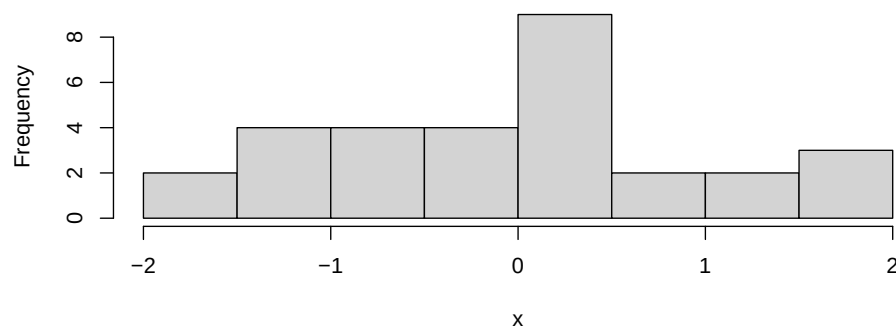


Figure 2: The P-value is 0.93

Knitr can automatically generate a figure environment if `fig.cap` is specified.

```
par(mar = c(4, 4, 0.1, 0.1))
plot(runif(4))
```

When `fig.cap` needs to use objects in the current chunk, we need to set the `eval.after` options so the objects are available when `fig.cap` is used.

```
library(knitr)
# evaluate fig.cap after a chunk is evaluated
opts_knit$set(eval.after = "fig.cap")
```

Dynamically generate a figure caption:

```
x = rnorm(30)
par(mar = c(4, 4, 0.1, 0.1))
hist(x, main = "")
```

Change the figure environment:

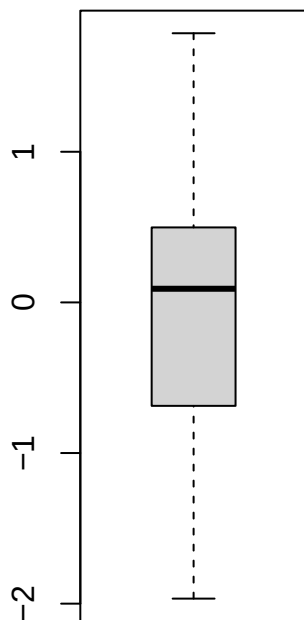


Figure 3: Figure * environment.

```
par(mar = c(4, 4, 0.1, 0.1))
boxplot(x)
```

If you have two figures, you can assign two captions to fig.cap:

```
par(mar = rep(0, 4), ann = FALSE)
plot(1:10)
```

```
plot(runif(10))
```

You can use figure references too. For example, Figure 2 is a histogram, and Figure 3 is a boxplot. The reference key is “fig: + the chunk label” by default.

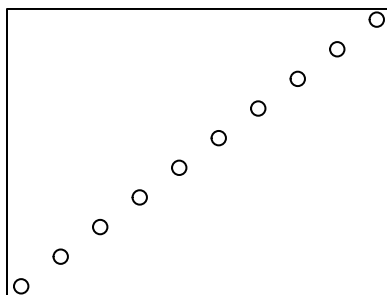


Figure 4: Hi figure one

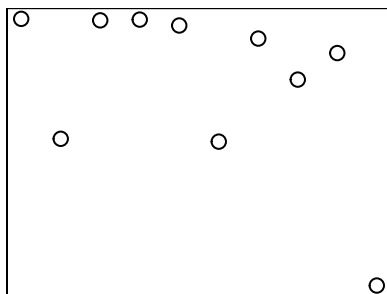


Figure 5: Hi figure two