

Converting Markdown to Other Formats with knitr::pandoc()

Yihui Xie

March 1st, 2013

A bit *introduction* here.

1 Start with a cool section

You can use traditional **Markdown** syntax, such as links and `code`.

2 Followed by another section

Of course you can write lists:

- apple
- pear
- banana

Or ordered lists:

1. items
2. will
3. be
4. ordered
 - nested
 - items

3 More sections

3.1 Hi

hi hi

3.2 Hello

hello hello

3.3 Howdy

howdy howdy

4 Okay, some R code

```
fit = lm(dist ~ speed, data = cars)
b = coef(fit) # coefficients
summary(fit)

##
## Call:
## lm(formula = dist ~ speed, data = cars)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -29.07  -9.53  -2.27   9.21  43.20
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  -17.579      6.758   -2.60   0.012 *
## speed         3.932      0.416    9.46  1.5e-12 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 15.4 on 48 degrees of freedom
## Multiple R-squared:  0.651, Adjusted R-squared:  0.644
## F-statistic: 89.6 on 1 and 48 DF, p-value: 1.49e-12
```

The code will be highlighted in all output formats.

5 And some pictures

```
par(mfrow = c(2, 2), pch = 20, mar = c(4, 4, 2, .1), bg = 'white')
plot(fit)
```

6 A little bit math

Our regression equation is $Y = -17.5791 + 3.9324x$, and the model is:

$$Y = \beta_0 + \beta_1 x + \epsilon$$

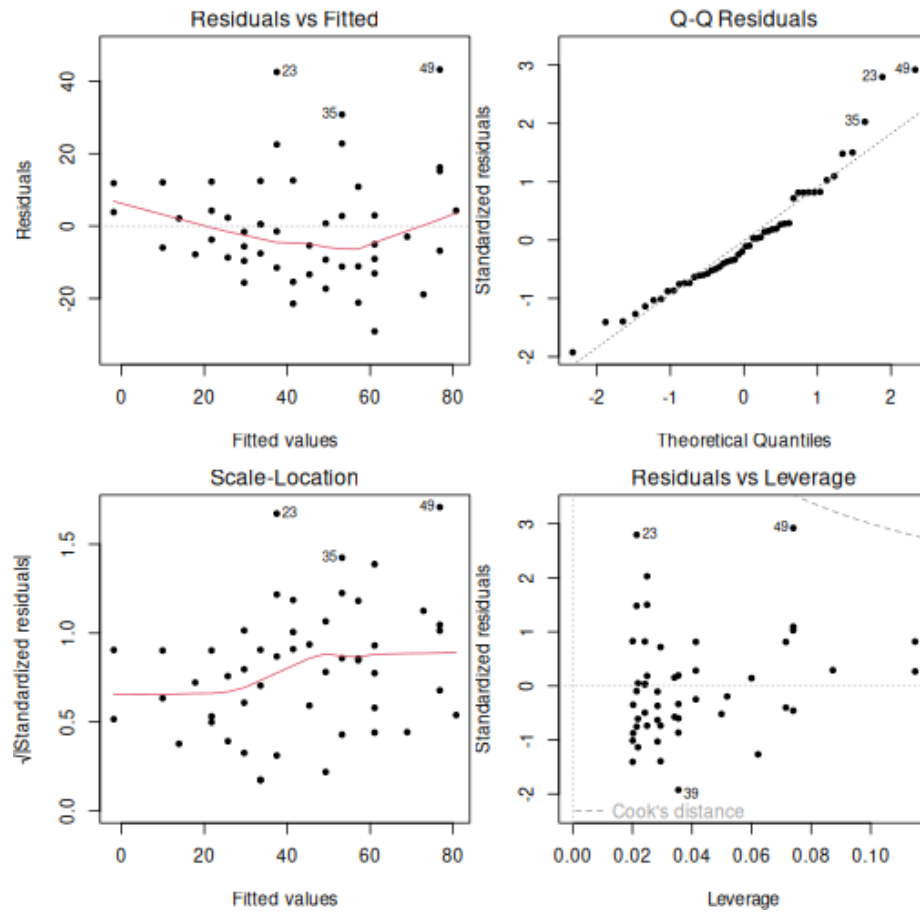


Figure 1: Regression diagnostics