


Input and Filters

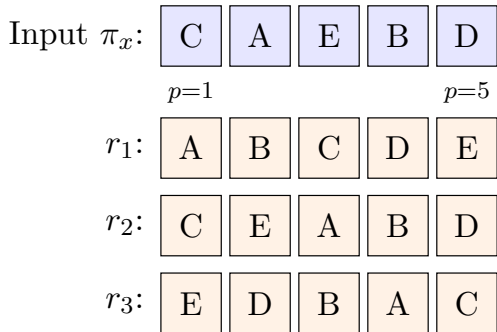

compute
motion
→

Motions $m_j[p] = \text{pos}_{r_j}(\pi_x[p]) - p$

$$D_j = \sum_p |m_j[p]|$$

m_1 :

+2	-1	+2	-2	-1
----	----	----	----	----

 $D_1=8$

m_2 :

0	+1	-1	0	0
---	----	----	---	---

 $D_2=2$

m_3 :

+4	+2	-2	-1	-3
----	----	----	----	----

 $D_3=12$



Output: $\pi' = [r_2, r_1, r_3]$ (closest first)