

Activity: Manage files with Linux commands

Scenario

In this scenario, you need to ensure that the /home/analyst directory is properly organized.

You have to make a few changes to the /home/analyst directory and the files it contains.

You also have to edit a file to record the changes or updates you make to the directory.

When you start, the /home/analyst directory contains the following subdirectories and files:

```
home
├── analyst
│   ├── notes
│   │   ├── Q3patches.txt
│   │   └── tempnotes.txt
│   ├── reports
│   │   ├── Q1patches.txt
│   │   └── Q2patches.txt
│   └── temp
```

You need to modify the /home/analyst directory to the following directory and file structure:

```
home
├── analyst
│   ├── logs
│   ├── notes
│   │   └── tasks.txt
│   └── reports
│       ├── Q1patches.txt
│       ├── Q2patches.txt
│       └── Q3patches.txt
```

Task 1. Create a new directory

First, you must create a dedicated subdirectory called **logs**, which will be used to store all future log files.

1. Create a new subdirectory called logs in the **/home/analyst** directory.
2. List the contents of the **/home/analyst** directory to confirm that you've successfully created the new logs subdirectory.

```
analyst@3a3adb1a44:~$ mkdir logs
analyst@3a3adb1a44:~$ ls
logs  notes  reports  temp
analyst@3a3adb1a44:~$
```

Task 2. Remove a directory

Next, you must remove the **temp** directory, as you'll no longer be placing items in it.

1. Remove the **/home/analyst/temp** directory.
2. List the contents of the **/home/analyst** directory to confirm that you have removed the **temp** subdirectory.

```
analyst@3a3adb1a44:~$ rmdir temp
analyst@3a3adb1a44:~$ ls
logs  notes  reports
analyst@3a3adb1a44:~$
```

Task 3. Move a file

The **Q3patches.txt** file contains notes taken on third-quarter patches and is now in the correct reporting format.

You must move the **Q3patches.txt** file from the **notes** directory to the **reports** directory.

1. Navigate to the **/home/analyst/notes** directory.

```
cd notes
```

2. Move the **Q3patches.txt** file from the **/home/analyst/notes** directory to the **/home/analyst/reports** directory.
3. List the contents of the **/home/analyst/reports** directory to confirm that you have moved the file successfully.

```

analyst@3a3adbe1a44:~/notes$ mv Q3patches.txt /home/analyst/reports
analyst@3a3adbe1a44:~/notes$ ls /home/analyst/reports
Q1patches.txt  Q2patches.txt  Q3patches.txt
analyst@3a3adbe1a44:~/notes$ rm tempnotes.txt
analyst@3a3adbe1a44:~/notes$ ls
analyst@3a3adbe1a44:~/notes$ touch tasks.txt
analyst@3a3adbe1a44:~/notes$ ls
tasks.txt
analyst@3a3adbe1a44:~/notes$ █

```

Task 4. Remove a file

Next, you must delete an unused file called **tempnotes.txt** from the **/home/analyst/notes** directory.

1. Remove the **tempnotes.txt** file from the **/home/analyst/notes** directory.
2. List the contents of the **/home/analyst/notes** directory to confirm that you've removed the file successfully.

```

analyst@3a3adbe1a44:~/notes$ mv Q3patches.txt /home/analyst/reports
analyst@3a3adbe1a44:~/notes$ ls /home/analyst/reports
Q1patches.txt  Q2patches.txt  Q3patches.txt
analyst@3a3adbe1a44:~/notes$ rm tempnotes.txt
analyst@3a3adbe1a44:~/notes$ ls
analyst@3a3adbe1a44:~/notes$ touch tasks.txt
analyst@3a3adbe1a44:~/notes$ ls
tasks.txt
analyst@3a3adbe1a44:~/notes$ █

```

No file in the notes directory

Task 5. Create a new file

Now, you must create a file named **tasks.txt** in the **/home/analyst/notes** directory that you'll use to document completed tasks.

1. Use the **touch** command to create an empty file called **tasks.txt** in the **/home/analyst/notes** directory.
2. List the contents of the **/home/analyst/notes** directory to confirm that you have created a new file.

```

analyst@3a3adbe1a44:~/notes$ mv Q3patches.txt /home/analyst/reports
analyst@3a3adbe1a44:~/notes$ ls /home/analyst/reports
Q1patches.txt  Q2patches.txt  Q3patches.txt
analyst@3a3adbe1a44:~/notes$ rm tempnotes.txt
analyst@3a3adbe1a44:~/notes$ ls
analyst@3a3adbe1a44:~/notes$ touch tasks.txt
analyst@3a3adbe1a44:~/notes$ ls
tasks.txt
analyst@3a3adbe1a44:~/notes$ █

```

Task 6. Edit a file

Finally, you must use the nano text editor to edit the **tasks.txt** file and add a note describing the tasks you've completed.

1. Using the nano text editor, open the **tasks.txt** file that is located in the **/home/analyst/notes** directory. **Answer:**

```
</> bash nano tasks.txt
```

2. Copy and paste the following text into the text input area of the nano editor:


```
Managed file structure in /home/analyst
```

3. Press **CTRL+X** to exit the nano text editor.
This triggers a prompt asking **Save modified buffer?**
4. Press **Y** to confirm that you want to save the new data to your file. (Answering "no" will **discard** changes.)

```
Completed tasks
1. Managed file structure in /home/analyst
```

```
Save modified buffer?
Y Yes
N No      ^C Cancel
```

5. Press **ENTER** to confirm that **File Name to Write** is tasks.txt.

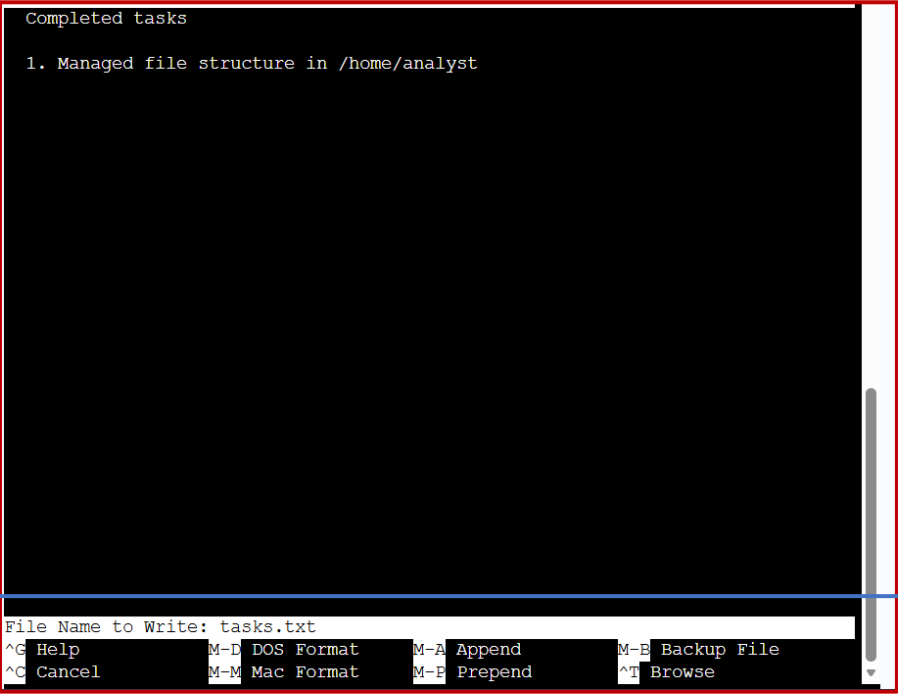


The screenshot shows the nano text editor interface. The main text area contains the following content:

```
Completed tasks  
  
1. Managed file structure in /home/analyst
```

The bottom status bar is highlighted with a blue box and contains the following text:

```
File Name to Write: tasks.txt  
^G Help      M-D DOS Format  M-A Append     M-B Backup File  
^C Cancel    M-M Mac Format  M-P Prepend    ^T Browse
```

6. Use the **clear** command to clear the Bash shell window and remove any traces of the nano text input area.

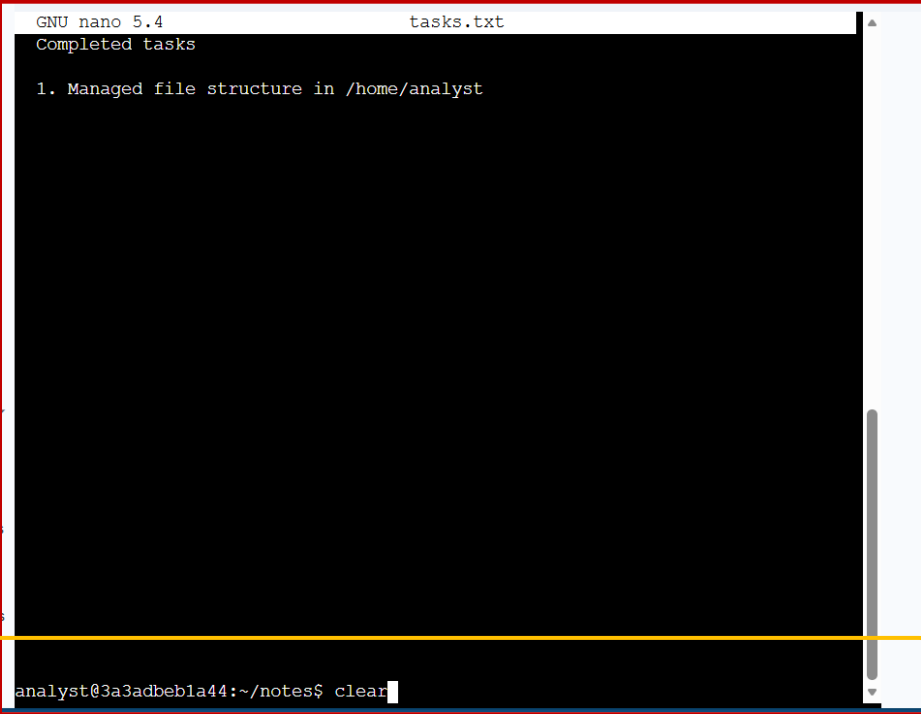

The screenshot shows the nano text editor interface. The main text area contains the following content:

```
GNU nano 5.4      tasks.txt  
Completed tasks  
  
1. Managed file structure in /home/analyst
```

The bottom status bar is highlighted with a yellow box and contains the following text:

```
analyst@3a3adb1a44:~/notes$ clear
```

7. Display the contents of the **tasks.txt** file to confirm that it contains the updated task details.

```
analyst@3a3adbeb1a44:~/notes$ cat tasks.txt
```

```
Completed tasks
```

```
1. Managed file structure in /home/analyst
```

```
analyst@3a3adbeb1a44:~/notes$
```