



Auditory foraging (non-episodic)

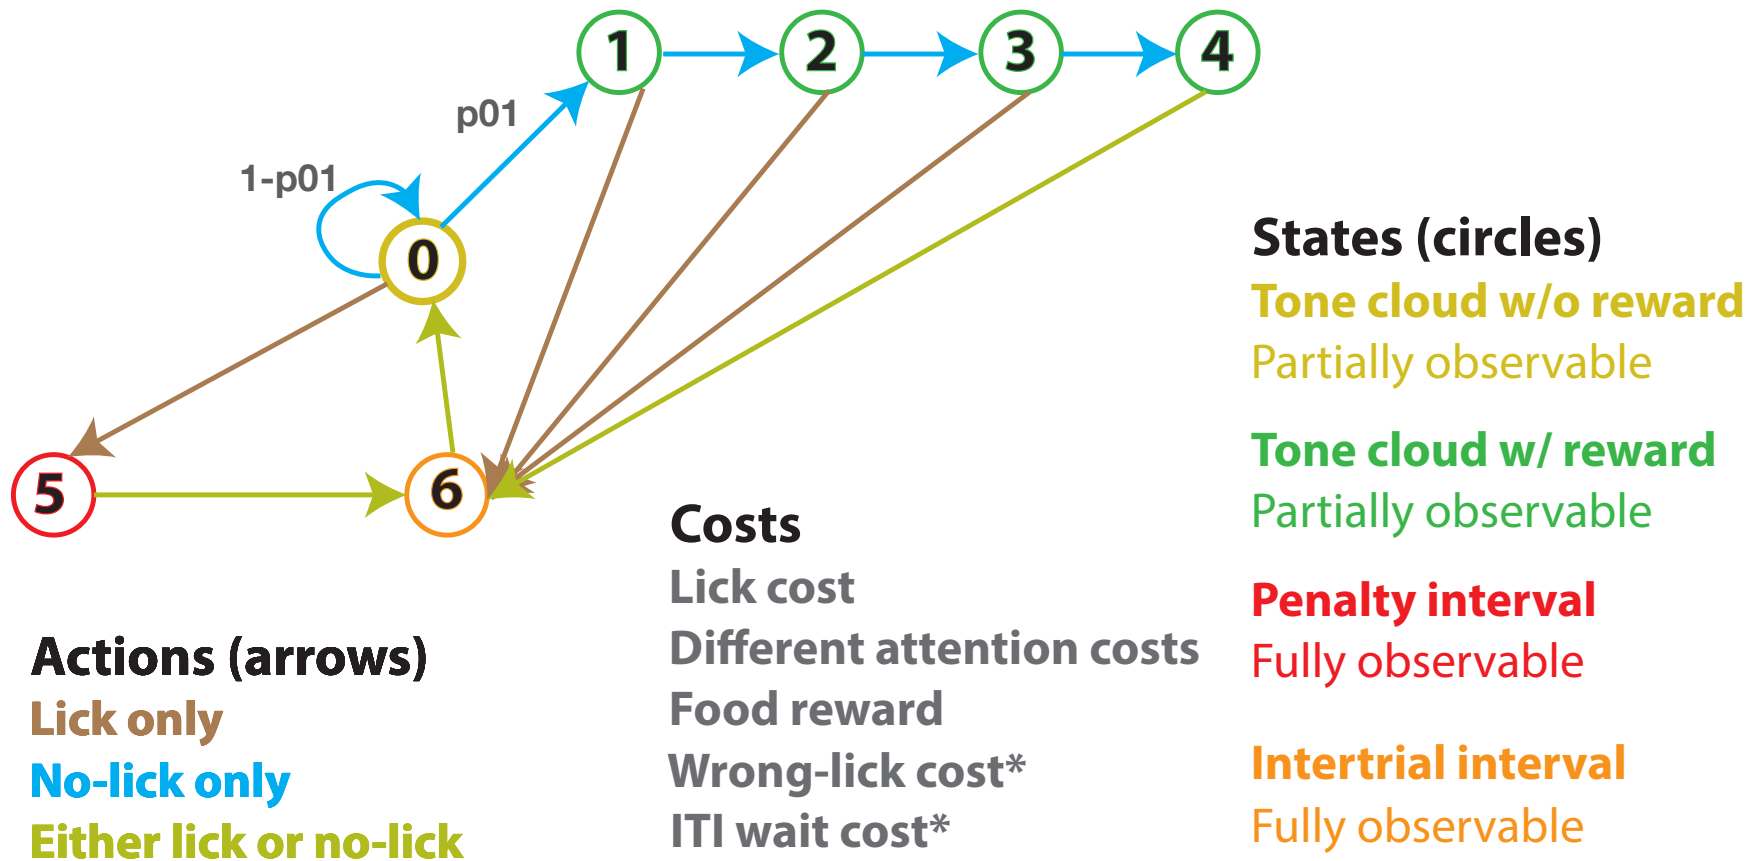


Auditory foraging (non-episodic)

- Inputs - observations, attention choice
- Output - cost of attention, parameterized using (coefficient, temperature)


Likelihoods for different ground truths

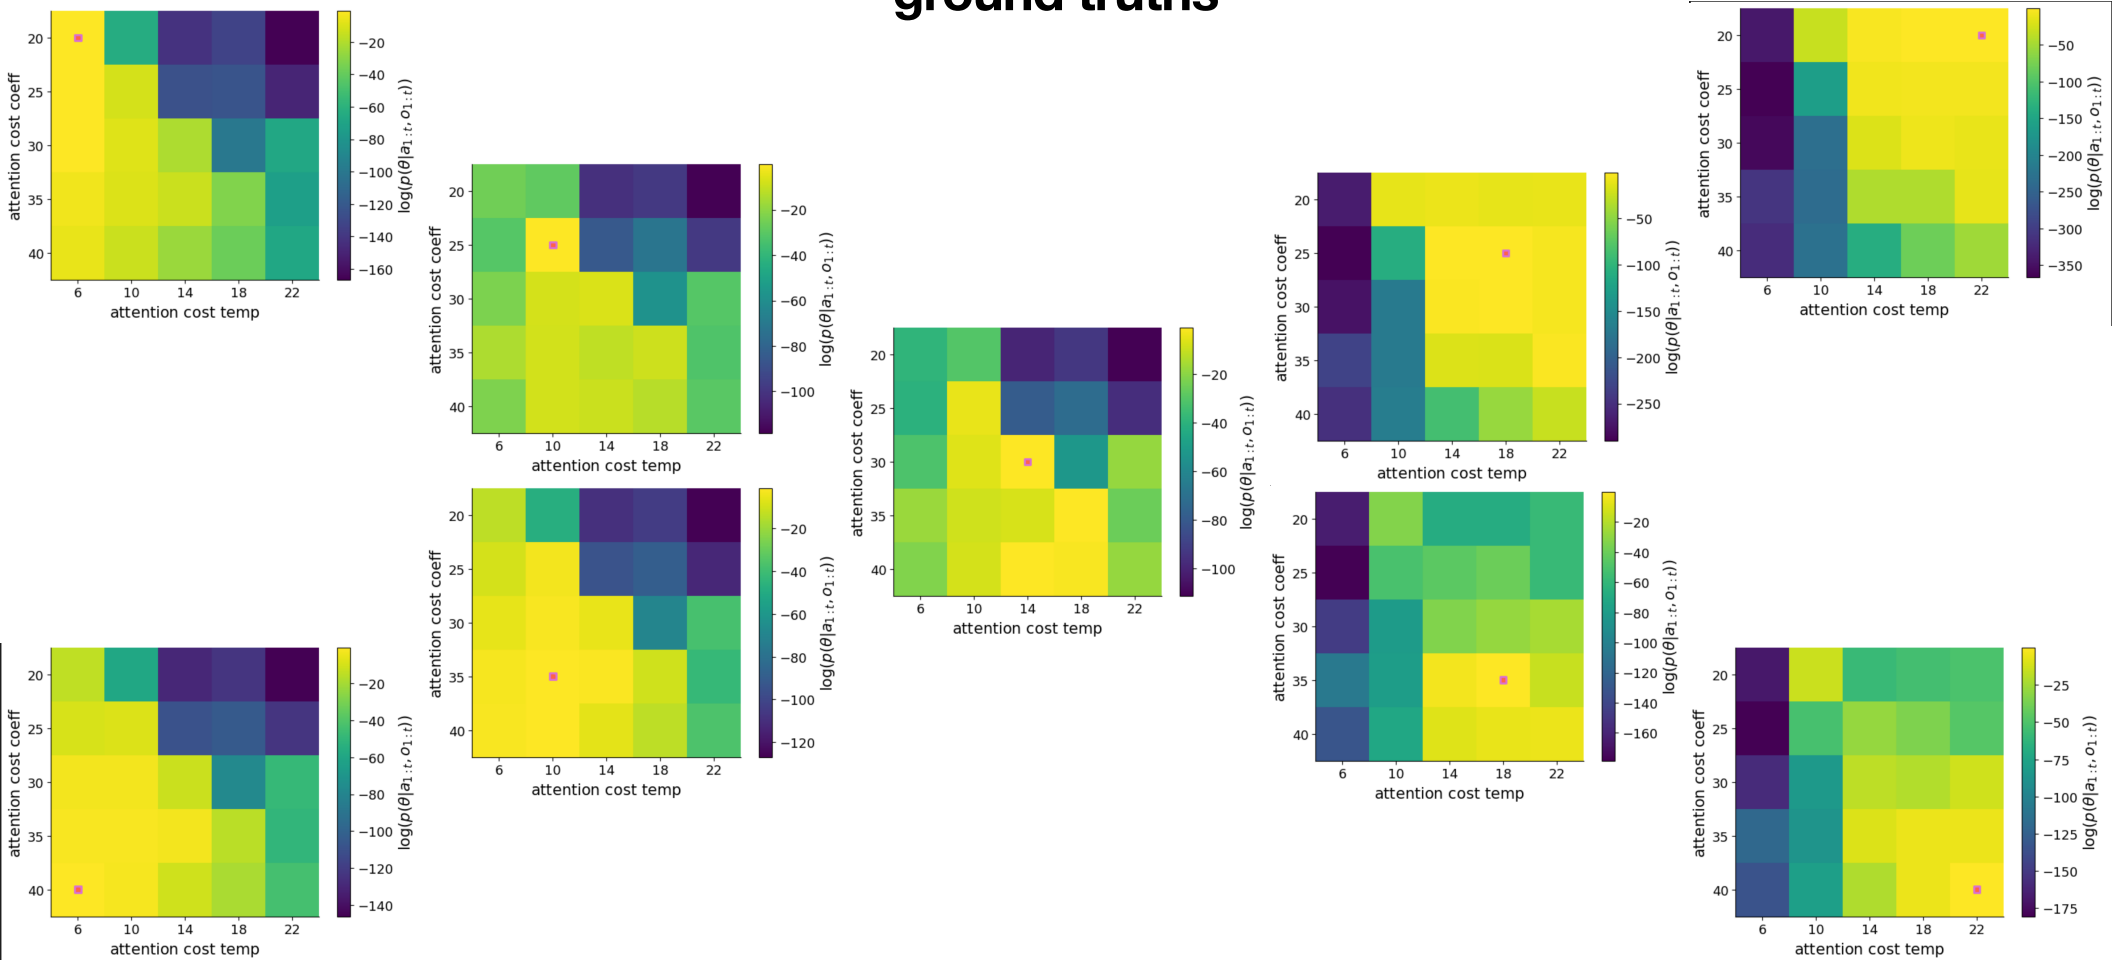

Auditory foraging (episodic)

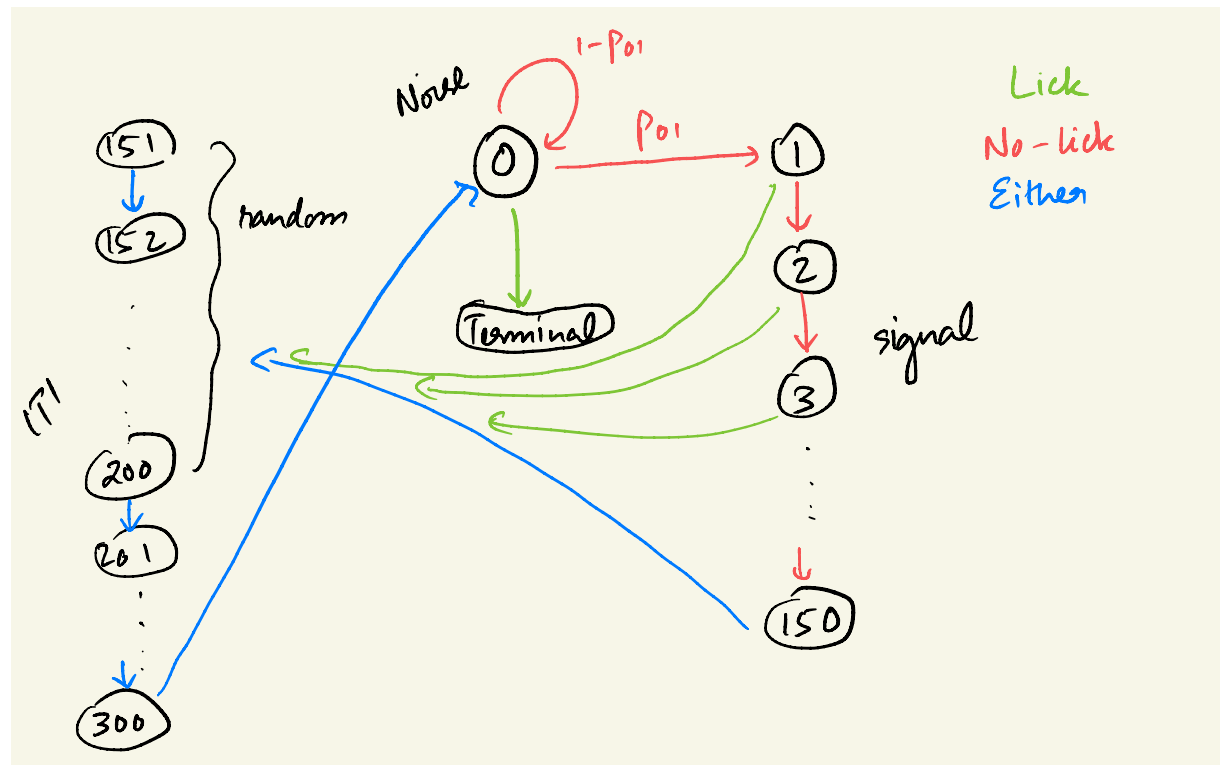


Able to collect some rewards before terminating

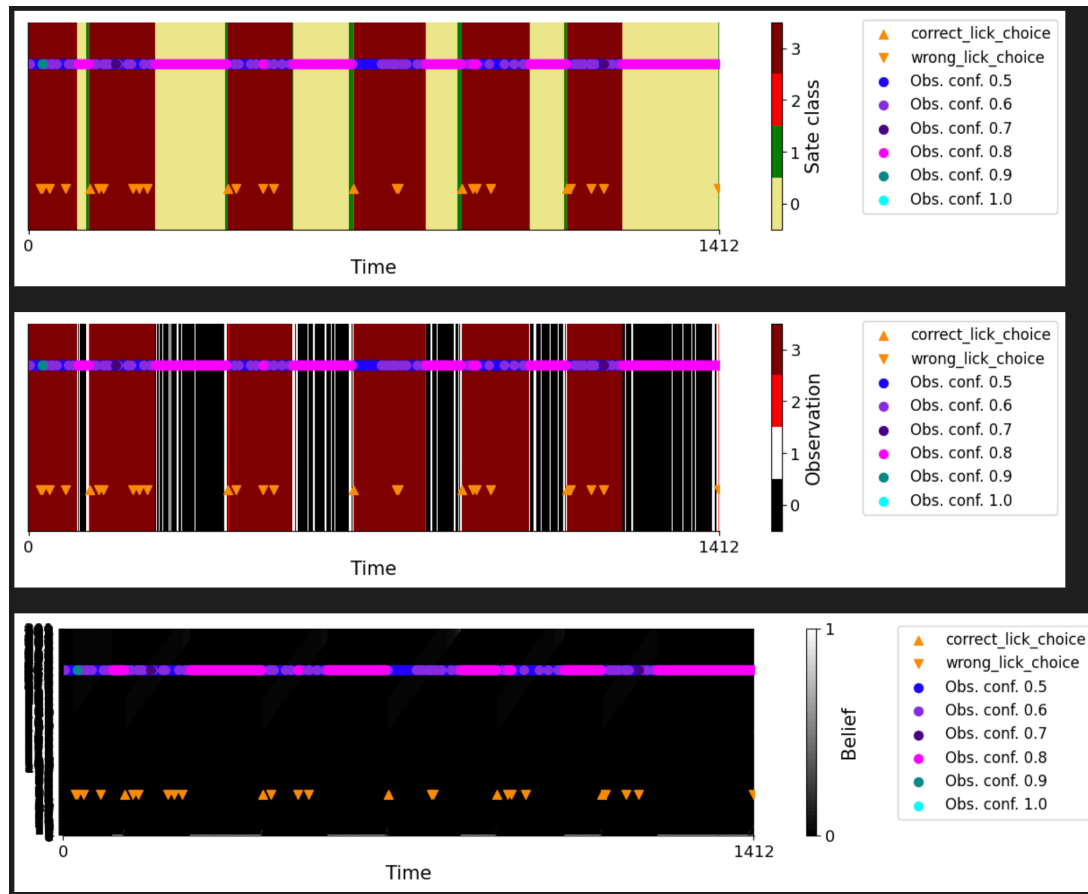


Preliminary analyses

Artificial beliefs to probe

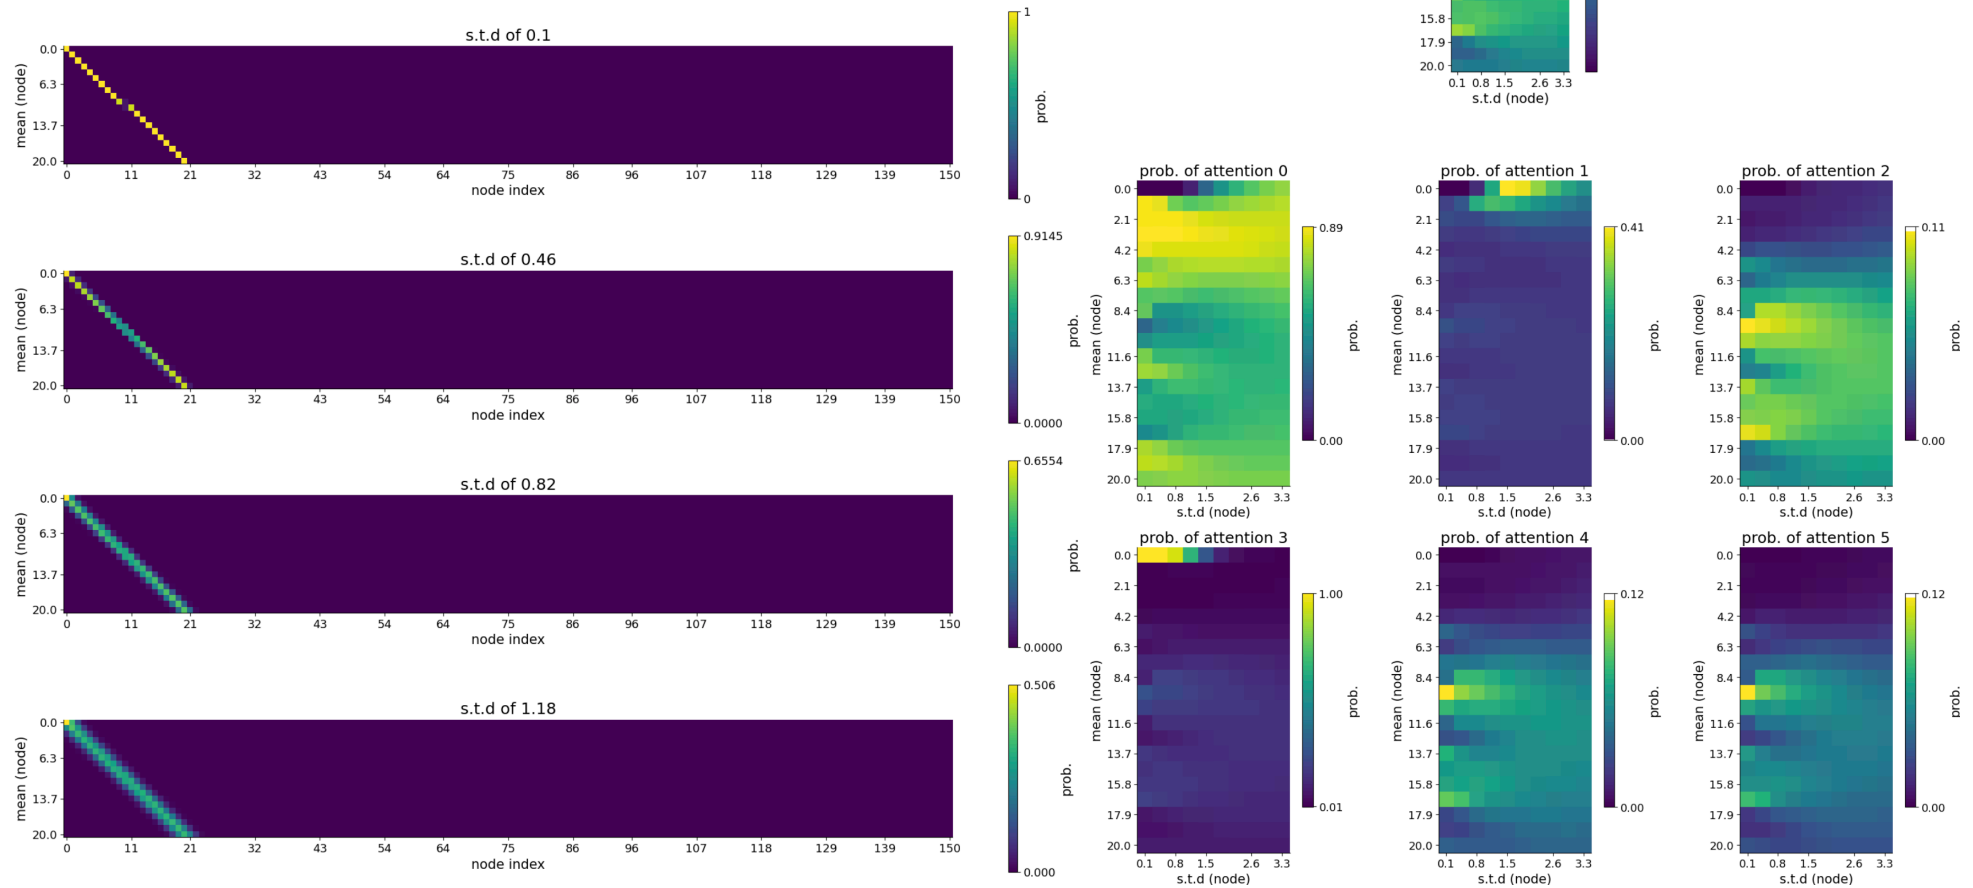


Preliminary analyses

Average action dist. during parts of the episode

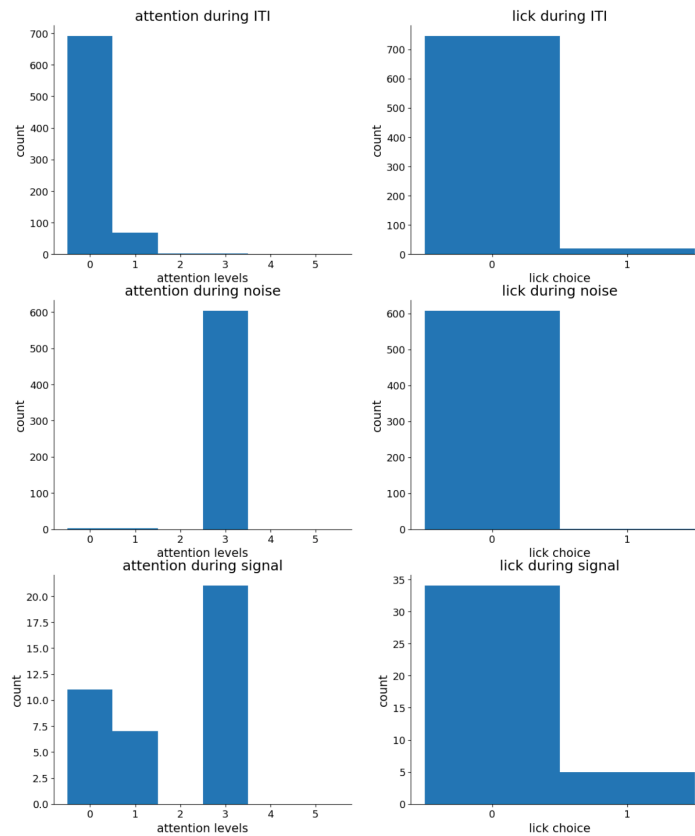



Preliminary analyses

Action dist. as a function of signal probability


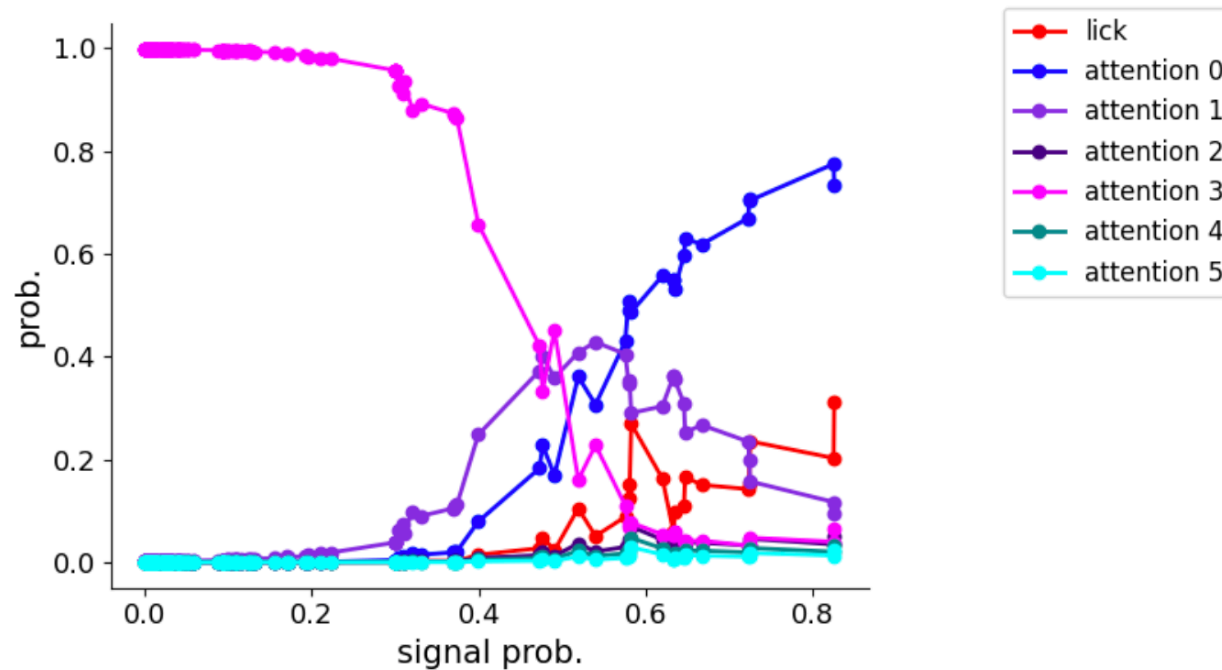


Preliminary analyses

Action dist. before termination (in ordering of time).

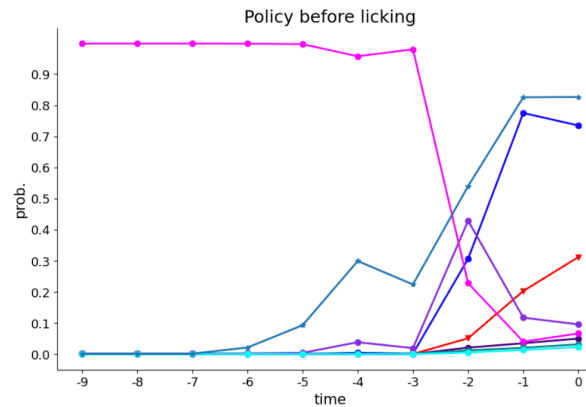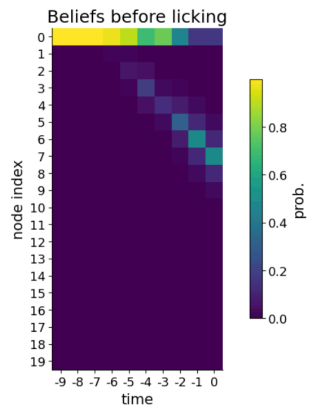

Zig-zag effect can be attributed to belief updates.

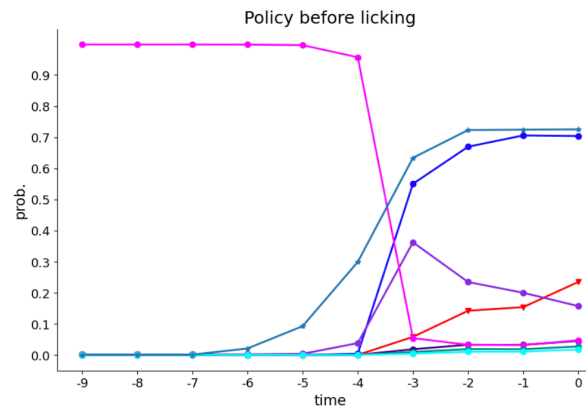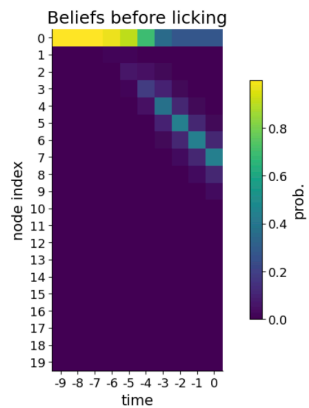

Partially observable action

- Inputs - observations, lick choice
- Output - attention choice, cost of attention
- Generating random actions, feeding to IRC, finding which has maximum likelihood
 - e.g. 6 levels of attention, 700 time steps in non-ITI region
 - 6^{700} possibilities worse case. Maybe possible to get rid of very few.
- Different settings of params gives about the same cumulative rewards (5-7). Maybe hard to distinguish just based on lick choices.