



User - Initialization (§4.1)

(1) Users build apps with the mRPC library and the compiled protocol stub. (2) The app connects to the mRPC service, specifying protocols of interest. (3) The mRPC service compiles and loads a library with app-specific marshaling functions.

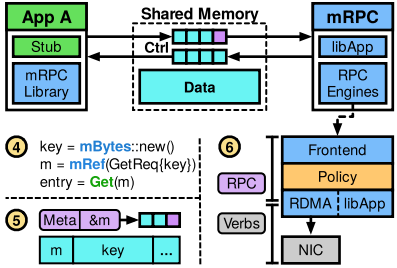

User - Runtime (§4.2)

(4) Users invoke RPCs using familiar function stubs, (5) while the mRPC library handles allocations and dispatching RPCs through shared memory. (6) The mRPC service implements the RPC processing logic with minimal copies and marshaling of data.

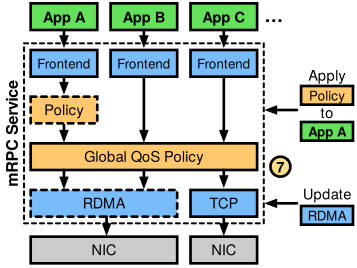

Operator - Management (§4.3)

(7) Operators manage RPC services by applying policies (global or per-app) and adding/upgrading processing logic. All of this can be done without disrupting (or modifying) apps.