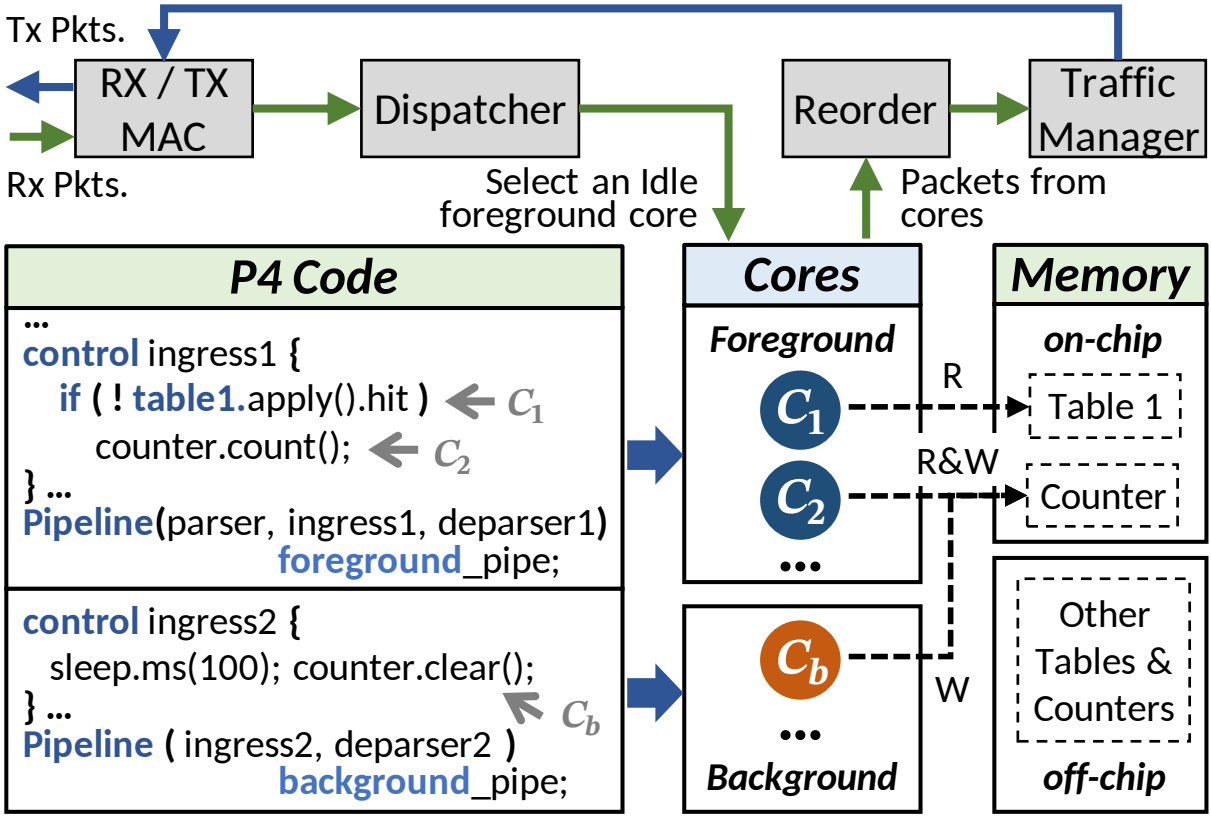
Tx Pkts.
RX / TX MAC
Rx Pkts.
Dispatcher
Select an Idle foreground core
Reorder
Traffic Manager
Packets from cores
P4 Code
...
control ingress1 {
if (! table1.apply().hit) ← C1
counter.count(); ← C2
} ...
Pipeline(parser, ingress1, deparser1)
foreground_pipe;
control ingress2 {
sleep.ms(100); counter.clear();
} ...
Cb
Pipeline (ingress2, deparser2)
background_pipe;
Cores
Foreground
C1
C2
...
Cb
...
Background
Memory
on-chip
R
Table 1
R&W
Counter
W
Other Tables & Counters
off-chip