From pose evidence to a controlled label decision

1 Source sequence + subject split

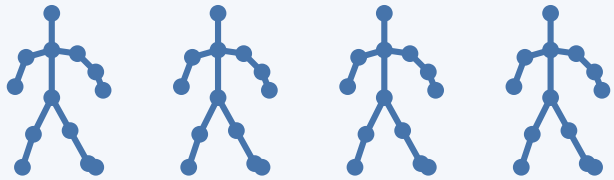

TRAIN

TEST

2 Deterministic measurements

Range | Asymmetry | Variability | Smoothness

3 Render one input view

Named values → train z-score

Fixed summary template

4 Evidence + candidate labels

A | B | C | D

No / shuffled evidence

Reverse / shuffle order

Zero-shot LLM

Parse candidate label

LoRA-SFT

Train → parse label

Matched LR / SVM

Same feature columns

Accuracy / macro-F1 / κ

Participant-cluster uncertainty · class-wise errors