

Guarded Win Statistics for Continuous Agent Evaluation

Yukang Zeng
yukang.zeng@yale.edu

Preprint—September 2026

Abstract

Agent evaluation combines verified completion, policy compliance, and resource use, often while trajectories are still arriving. A hierarchical win statistic makes outcome priorities explicit, but a favorable aggregate can conceal a decline in a higher-priority population outcome. We develop a guarded evaluation protocol that combines prioritized comparisons with separate component requirements. It distinguishes same-task benchmark repetitions from randomized cross-arrival online comparisons and gives finite-sample continuous-monitoring guarantees. For delayed outcomes, feasible completions of partial traces bound the final pair score. A prefix envelope transfers established full-data guarantees to these partial scores and cannot decide later than its matched completed-prefix comparator. Complete proofs identify the required enrollment-order assumptions and distinguish threshold error control from a calendar-time e-process. In 2,000-repetition stationary simulations, guarded betting made false deployments in 0.45% of identical-agent runs versus 31.05% for repeated ordinary Wald tests. In a separate informative-delay study, partial evidence reduced mean capped decision time from 41.285 to 22.363 ticks for an equally successful, cheaper alternative; both valid methods deployed in 99.7% of runs and had 0.6% null false deployments. An ordinal replay of 10,008 historical trace comparisons certified 34.2% before the later terminal marker, demonstrating archived certificate feasibility without claiming operational latency savings. Two local open-weight studies add 1,182 coding episodes and 196 planned airline records, with descriptive same-task contrasts and explicitly qualified replay inference.

1 Introduction

An agent can finish a task while using excessive resources, violate a permission rule while obtaining a correct answer, or add verification steps that improve reliability at a higher cost. An evaluator therefore has several outcomes, often with a meaningful order of importance. Accuracy–cost analyses emphasize that capability alone does not characterize an agent system (Kapoor et al., 2024). Interactive agent benchmarks further expose variation across repeated trajectories and across task families (Barres et al., 2025; Yang et al., 2024). These measurements leave a consequential statistical question: when does accumulating evidence justify replacing the deployed system?

Generalized pairwise comparisons and win statistics address ordered outcomes in clinical trials (Buyse, 2010; Pocock et al., 2012). A comparison proceeds through a prespecified hierarchy, stopping at the first meaningful difference. Applied to agents, the rule might prefer policy compliance, then verified completion, then lower cost among successful runs. Unlike a weighted score, the explanation of a win identifies the deciding tier. This construction is established statistical machinery, and win statistics have already appeared in AI evaluation (Feng et al., 2026).

Three distinctions determine whether such a comparison can support an online decision. First, priority within a pair does not protect a population-level component: many cost wins can outweigh fewer success losses. Second, a resettable benchmark observes both systems on a common task, whereas an ordinary live A/B experiment observes only the assigned system on each arrival. The corresponding preferences need

not agree. Third, repeatedly inspecting a fixed-sample confidence interval does not preserve its error rate. Repeated runs, adaptive allocation, and delayed completion add further ways for the nominal comparison to differ from the one actually estimated.

We specify a protocol that keeps these decisions separate and then combines them. The inferential ingredients are existing bounded-score confidence sequences and betting processes (Howard et al., 2021; Waudby-Smith and Ramdas, 2024). Our contribution is a design-specific treatment of prioritized agent evaluation: explicit targets for paired and online data; a guarded deployment rule with the appropriate stationary or drifting error guarantee; partial-trace score bounds that retain pending episodes; and reproducible experiments examining compensation, informative delay, and dependence. We give complete derivations, including conditions under which the guarantees do not apply. We do not propose a new generic confidence-sequence inequality or claim that sequential win statistics are new.

2 What is a win, and whose outcomes are compared?

Let Y record an entire episode through a fixed evaluation horizon: verified outcomes, selected trajectory summaries, and resources. A chronological tool call is not an independent statistical unit. For tier k , an antisymmetric rule $d_k(y, y') \in \{-1, 0, 1\}$ reports a meaningful advantage, disadvantage, or operational tie. The hierarchical kernel is

$$h(y, y') = \sum_{k=1}^K d_k(y, y') \prod_{\ell < k} \mathbf{1}\{d_\ell(y, y') = 0\}. \quad (1)$$

Only the first decisive tier contributes. A resource comparison can be disabled unless both episodes satisfy a symmetric eligibility rule, such as both achieving verified completion. For positive costs, our empirical primary tolerance is $|c_A - c_B| > 0.05 \max(c_A, c_B)$. Equality is a tie. This threshold is an operational preference, not a significance test.

For a specified comparison law, let (p_W, p_L, p_T) denote win, loss, and tie probabilities. We monitor the bounded net benefit $\theta = p_W - p_L = \mathbb{E}h$. We also report $WR = p_W/p_L$ when $p_L > 0$, and $WO = (1 + \theta)/(1 - \theta)$ when defined. A win ratio of two does not imply twice the task-success probability. Tier-level win and loss contributions accompany the summary, together with the component means. Zero losses do not justify adding an arbitrary pseudocount.

Three comparison targets. For task description X and episode randomness ξ , a resettable benchmark can estimate

$$\theta_{\text{task}} = \mathbb{E}_X \mathbb{E}_{\xi_A, \xi_B} h\{Y^A(X, \xi_A), Y^B(X, \xi_B)\}, \quad \xi_A \perp \xi_B \mid X. \quad (2)$$

This compares independent runs of the same task and depends on the task distribution. Using the same simulator seed instead defines a coupled-run preference. Neither is automatically the individual live-arrival cross-world quantity $\mathbb{E}h(Y^A, Y^B)$, which requires a joint potential-outcome law unobserved under single-system exposure. The distinction between marginal, individual, and same-covariate preferences is established in Even and Josse (2025). Contrast functions averaged over the marginal potential-outcome laws, with inverse-probability and doubly robust estimation, are developed by Mao (2018); this distributional causal target is not new here.

For independent online arrivals in stratum s , the observable distributional comparison is

$$\theta_s = \int h(a, b) dF_{A,s}(a) dF_{B,s}(b). \quad (3)$$

This can mix tasks of different difficulty within a stratum. Stratification by an outcome-blind task family refines the question but does not make separate users the same user. Appendix A supplies an explicit

coupling example with identical arm marginals and opposite individual preferences. The example illustrates an identification limitation; it is not evidence that the product-law target in Equation (2) is inherently unidentified.

Pairwise priority and population protection. Let B always succeed. Suppose A fails with probability ϵ , and otherwise succeeds more cheaply. Then a success-first hierarchy gives $\theta = 1 - 2\epsilon$ while $\Delta_S = P(S^A = 1) - P(S^B = 1) = -\epsilon$. Thus even a strongly favorable preference can violate a success noninferiority margin. We define the desired deployment region as

$$\mathcal{D} = \{\theta > 0, \Delta_j > -\delta_j \text{ for all } j = 1, \dots, J\}, \quad (4)$$

where $g_j(Y) \in [0, 1]$ is an independently reported component and $\Delta_j = \mathbb{E}g_j(Y^A) - \mathbb{E}g_j(Y^B)$. The margins δ_j require application-specific justification. A relative compliance requirement also does not certify an acceptable absolute event rate.

3 A randomized online observation protocol

Before observing outcomes, form disjoint pairs of arrivals within a prespecified stratum. Let $R_i = 1$ assign system A to the first arrival and B to the second; $R_i = 0$ reverses the order. The known probability $q_i = \mathbb{P}(R_i = 1 \mid \mathcal{F}_{i-1})$ may depend on completed past data, but is bounded away from zero and one. Each arrival receives only one system. This design fixes one exposure per arm per pair; it is not an arbitrary traffic-allocation bandit.

Write $U_i = h(Y_{i1}^A, Y_{i2}^B)$ and $V_i = h(Y_{i2}^A, Y_{i1}^B)$ for the potential oriented pair scores. Only one is observed. The inverse-probability score

$$Z_i = \frac{R_i U_i}{2q_i} + \frac{(1 - R_i)V_i}{2(1 - q_i)} \quad (5)$$

has conditional expectation $\mathbb{E}\{(U_i + V_i)/2 \mid \mathcal{F}_{i-1}\}$ under randomization independent of the potential records and no cross-arrival interference. With conditionally independent, exchangeable arrivals in a stratum, this reduces to Equation (3). Otherwise it remains a symmetric cross-arrival target, rather than silently imposing exchangeability. Component scores replace h by $g_j(a) - g_j(b)$.

For balanced order randomization, $q_i = 1/2$ and $Z_i \in \{-1, 0, 1\}$. For unbalanced randomized order, $|Z_i| \leq B_i = 1/\{2 \min(q_i, 1 - q_i)\}$. Unweighted observed preferences can be biased when the two positions differ. The target, weighting, and range must therefore be specified together. The proof is a conditional randomization identity (Theorem 4), not an assumption that adaptive allocation makes potential outcomes observable.

Endpoint maturity. Freeze an episode horizon H . Prespecified per-episode limits define endpoint outcomes; exhaustion of a study-level monetary budget instead leaves unobserved endpoints requiring bounds. A baseline processes the completely matured prefix of enrolled pairs. This can incur latency when a slow earlier pair blocks later completed pairs. It preserves the order defining the target. Selecting whichever runs finish first can preferentially include fast successes and change the comparison law. A display at a random completed-prefix index is covered by an all-prefix guarantee; this is not a license to delete missing or slow episodes. The delayed-outcome result in Proposition 10 states the necessary filtration assumptions.

4 Continuous monitoring and guarded decisions

A finite-sample bound for drifting averages. Let $\mu_i = \mathbb{E}(Z_i \mid \mathcal{F}_{i-1})$ and $\bar{\mu}_n = n^{-1} \sum_{i \leq n} \mu_i$. If the predictable range of Z_i has width r_i , put $V_n = \sum_{i \leq n} r_i^2/4$. For a fixed $\rho > 0$, a normal-mixture confidence

sequence is

$$\bar{Z}_n \pm \frac{1}{n} \sqrt{(V_n + \rho) \log \left(\frac{V_n + \rho}{\rho \alpha^2} \right)}. \quad (6)$$

Simultaneously over all n , this interval covers $\bar{\mu}_n$ with probability at least $1 - \alpha$. For balanced ternary scores $V_n = n$. The proof integrates Hoeffding exponential supermartingales against a normal mixing law and applies Ville’s inequality (Howard et al., 2021). Under drift the covered quantity is a running average of conditional effects; it does not describe the current or future deployment population. Range-only bounds can be conservative for rare-event components.

A directional fixed-stake betting implementation. For a bounded score $X_i \in [-B, B]$, gate threshold $c > -B$, and fixed bets $0 < \lambda_k < 1/(B + c)$ with weights $w_k \geq 0$ summing to one, define

$$E_n(c) = \sum_k w_k \prod_{i=1}^n \{1 + \lambda_k (X_i - c)\}. \quad (7)$$

Under the conditional null $\mathbb{E}(X_i \mid \mathcal{F}_{i-1}) \leq c$, this is a nonnegative supermartingale starting at one. Crossing $1/\alpha$ therefore rejects the gate null with anytime error at most α (Waudby-Smith and Ramdas, 2024). Our stationary simulations use 40 fixed geometric bets and ternary count sufficient statistics. Finite-grid validity does not imply power for arbitrarily small gaps: at least one bet must have positive expected log growth. This implementation is a standard betting baseline specialized to the deployment rule.

By martingale domination, the same fixed grid controls crossings at prefixes whose running conditional mean is at or below the threshold (Proposition 7); under drift, the observed wealth need not itself be a supermartingale.

One deployment claim versus simultaneous component claims. Let $c_0 = 0$ for preference and $c_j = -\delta_j$ for the component gates. Under constant conditional means, accept deployment only after every gate has valid evidence against its null. If the deployment region fails, at least one fixed component null is true. A false deployment entails a crossing of that component’s level- α process. Consequently the probability of ever falsely deploying is at most α , without dividing α across the required conjuncts (Theorem 8). This intersection–union guarantee concerns the single deployment decision; it is not simultaneous $1 - \alpha$ coverage for all reported effects.

Under arbitrary drift, the component violating the region can change over time. Then a fixed-null argument is insufficient. Use simultaneous component confidence sequences, for example at levels $\alpha/(J + 1)$, and deploy only when every lower bound for its running target exceeds its threshold (Theorem 9). For fixed-stake betting gates the same allocation controls the conjunction when every gate crosses at the same current prefix; retaining old crossings does not certify current running targets. For several candidates or repeated model revisions, further error allocation is necessary. Reusing the same data to choose the hierarchy, tolerances, or candidate invalidates a guarantee that assumes those choices frozen.

4.1 Using incomplete trajectories without selecting fast outcomes

Let $N(t)$ denote the number of enrolled pairs at calendar time t . For each gate, the observed partial traces define bounds $\ell_i(t) \leq X_i \leq u_i(t)$ on the final fixed-horizon score, within the known score range, simultaneously for every pair and update. These bounds range over every feasible completion. For a success-then-cost hierarchy, a successful A episode at cost 1 already defeats a pending B episode that has irreversibly spent 2: B either fails or succeeds at higher cost. An unresolved higher safety tier would prevent that certificate. An absence of observed violations alone cannot certify final compliance.

Write $b_\alpha(V_n)$ for the numerator of the radius in Equation (6). For every enrolled prefix $n \leq N(t)$,

$$\left[\frac{\sum_{i \leq n} \ell_i(t) - b_\alpha(V_n)}{n}, \frac{\sum_{i \leq n} u_i(t) + b_\alpha(V_n)}{n} \right] \quad (8)$$

covers the corresponding running conditional mean simultaneously over n and t with probability at least $1 - \alpha$. On the event that the complete-score confidence sequence covers every prefix, replacing its score sum by lower and upper bounds preserves coverage pathwise. No outcome-independent reveal-time assumption is needed. Its width is the complete-data width plus $n^{-1} \sum_i (u_i - \ell_i)$, making the cost of unresolved information explicit. If the number enrolled tends to infinity and that average width vanishes, stationary means with strictly positive gate margins are eventually resolved (Appendix B).

For stationary gates, positive betting factors similarly give

$$\underline{E}_{n,t}(c) = \sum_k w_k \prod_{i \leq n} \{1 + \lambda_k(\ell_i(t) - c)\} \leq E_n(c). \quad (9)$$

Thus a partial-score crossing at any time and prefix entails a crossing of the latent complete-score process, controlling its probability under the fixed conditional null. Retrospectively refining a pending factor uses new information about the original pair; it does not add a new observation. Under stationarity, deploy if one available prefix satisfies all gates. Evaluating every candidate prefix includes every completed prefix and therefore cannot decide later than a completed-prefix method using the same candidates, bets, and calendar looks. Using only the latest enrolled prefix lacks this dominance, because additional pending pairs can dilute its lower wealth.

The argument assumes a valid complete-score enrollment filtration and guaranteed completion bounds. Shared infrastructure, candidate adaptation, or fallible interim labels can violate those premises. We prove threshold-crossing control, not that the partial wealth is an e-process in the richer calendar-time filtration. Worst-case pending-outcome stopping and time-uniform filtration transfer have direct precedents (Henzi and Ziegel, 2022b;a; Choe and Ramdas, 2024); our specialization uses hierarchy and component bounds in a deployment protocol. Under drift, each selected prefix retains its own target and requires simultaneous component coverage. A maximum of historical lower bounds is not a lower bound on the current drifting effect.

Offline repeated runs. With R common-seed trials for each task, the R^2 cross-run scores are dependent. Under independent seed clusters, pairs with different seed indices estimate the independent-run target; the R same-seed pairs estimate a coupled target. Their equal-weight mixture assigns weight $1/R$ to the latter. We average eligible cross-run scores within each task, weight tasks equally, and resample complete tasks for uncertainty. The effective independent units are tasks, or larger shared clusters when required. The appendix provides the unbiased task estimator, asymptotic variance, bounded-mean alternative, and coupling decomposition.

5 Experiments

Synthetic online streams. We generated six stationary independent-arrival scenarios, each with 2,000 independent repetitions and at most 10,000 pairs (20,000 agent executions). Compliance and success are Bernoulli outcomes; cost is lognormal. The primary hierarchy is compliance, success, then cost among jointly compliant successful pairs. The guarded rule requires positive net benefit, a success difference above -0.03 , and a compliance difference above -0.01 . These illustrative margins were fixed before viewing the initial numerical results. Alpha is 0.05. Monitoring begins at 100 pairs and occurs every 50 pairs, additionally

Table 1: Deployment probability (%) over 2,000 synthetic repetitions. Win-only betting addresses composite preference; guarded methods require the same three gates. Repeated Wald is unadjusted; group Wald uses ten planned looks with Bonferroni allocation. Wald validity is asymptotic. The normal-mixture guarded baseline made no deployments in these settings.

	Win only betting	Guarded betting	Repeated Wald	Group Wald	Fixed Wald
Identical agents	0.55	0.45	31.05	1.65	4.30
Efficiency gain	100.00	96.85	99.95	99.30	99.95
Success regression	100.00	0.00	0.35	0.00	0.00
Compliance regression	100.00	0.00	2.05	0.00	0.00
Joint gain	100.00	100.00	100.00	100.00	100.00
Weak gain	5.50	4.90	58.35	13.30	28.40

including the ten prespecified group looks. Analytic net-benefit targets are independently checked in the code.

Under identical agents, guarded betting made 9/2,000 deployments (0.45%; 95% Wilson interval 0.24–0.85%), while unadjusted repeated Wald inspection made 621/2,000 (31.05%; 29.06–33.11%). The valid guarded betting procedure deployed the cheaper, equally effective agent in 96.85% of repetitions. Win-only betting favored the cheaper agent in every success-regression and compliance-regression repetition; guarded betting made no deployments in either scenario (0/2,000; upper Wilson limit 0.192%). These are failures of a preference-only deployment rule, not false rejections of the composite-preference null, which is false in those scenarios.

The range-only normal-mixture rule made no deployments in any initial scenario. Its width at 10,000 balanced pairs is about 0.033, too large to resolve the 0.01 compliance margin when the compliance difference is near zero. This is a documented conservatism cost of that baseline, not evidence that anytime-valid inference generally lacks power. Directional betting uses the observed score distribution and is materially more useful here. We do not infer uniform power superiority over competitive empirical-Bernstein or sequential U-statistic methods.

Targeted stress tests. Extensions designed after the initial run placed each guardrail exactly on its null boundary. Guarded betting deployed in 0.75% of success-boundary and 0.45% of compliance-boundary repetitions; repeated Wald deployed in 32.40% and 30.45%. A separate repeated-run experiment with 40 task clusters and four runs per arm gave 95.25% coverage for a task-level t interval, versus 55.65% when all 16 within-task comparisons were incorrectly treated as independent. In a nonexchangeable-pair stress model with adaptive order probabilities and zero symmetric preference, unweighted normal-mixture monitoring rejected in 93.0% of 1,000 repetitions. Correctly weighted betting rejected in 1.1% and the conservative weighted normal-mixture rule in 0%. This abstract bounded-score experiment isolates weighting bias; it does not simulate full agent traces.

Historical agent trajectories. We reanalyzed 3,336 public τ^2 -bench runs from three systems (GPT-4.1, o4-mini, and Claude-3.7) on 50 airline, 114 retail, and 114 telecom tasks, with four trials per task and system. Within each domain, the compared runs share the same harness commit, tasks, and user simulator. We also analyzed 600 SWE-agent trajectories, one per system on each of 300 SWE-bench Lite tasks. The hierarchy is verified success, historical recorded agent cost, then tool-call count; both failures tie. No policy-compliance label is fabricated where the source does not provide one. Recorded simulation duration includes simulator and service delays and is not used as clean agent latency.

o4-mini versus Claude-3.7: historical task-matched comparisons

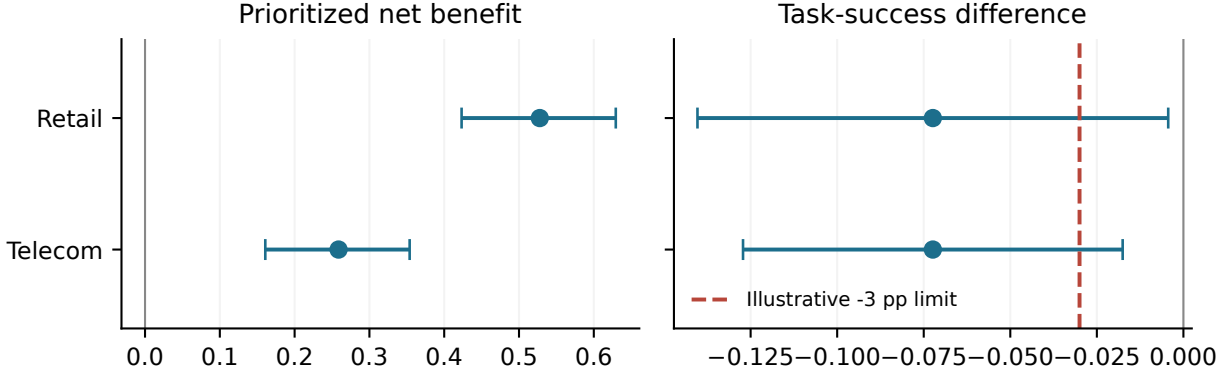


Figure 1: Historical agent comparisons: net benefit and success-rate difference can favor opposite systems. Intervals are pointwise task bootstrap summaries, conditional on the archived run configurations; they do not supply simultaneous or production-population guarantees.

The primary τ^2 statistic excludes same-seed diagonal comparisons, leaving 12 cross-seed comparisons per task. A theory audit motivated this amendment before the hierarchical numerical results were inspected. Same-seed and all-16-pair statistics are sensitivity analyses. We report pointwise percentile intervals from 10,000 complete-task bootstrap resamples. Because these are historical benchmark tasks with only four shared seed values per domain, the intervals are descriptive under task-resampling assumptions, conditional on the recorded seed suite; they do not account for arbitrary cross-task seed effects or establish uncertainty over newly generated seeds. SWE repository dependence poses an additional limitation. There is no multiplicity-adjusted leaderboard claim.

The primary empirical finding is a disagreement between preference and success. In retail, o4-mini versus Claude-3.7 has net benefit 0.528 (pointwise interval $[0.423, 0.629]$), despite a success difference of -0.072 ($[-0.140, -0.004]$). In telecom the corresponding values are 0.259 ($[0.161, 0.354]$) and -0.072 ($[-0.127, -0.018]$). The recorded success differences themselves violate the illustrative three-percentage-point requirement, even though the composite preferences are favorable. This is a descriptive diagnosis on the archived workload, not an anytime-valid deployment decision. Cost decides 60.0% of retail and 33.1% of telecom comparisons for this contrast.

The two reversals persist for cost tolerances from 0% to 20%. Changing the priority itself matters: placing tool-call count before cost changes the telecom o4-mini–Claude-3.7 net benefit from 0.259 to -0.126 . This is a different preference question, not an estimator inconsistency. SWE-agent Claude-3-Opus versus GPT-4 has net benefit -0.113 and success difference -0.063 on the archived runs. These case studies retain historical model, harness, and price limitations; they do not assert a ranking of current models.

Open-weight coding workflows. On 591 tasks, local Qwen2.5-Coder-7B with self-tests and repairs (B) and single-shot generation (A) each passed 433 tasks. B used 4.46 times the mean workflow latency and 6.33 times the total tokens. The 295 randomized first-pass cross-task pairs gave 69 B wins, 18 ties and 208 losses under success, latency, then completion tokens. Net benefit was -0.471 ; the post-hoc normal-mixture band $[-0.654, -0.288]$ targets running history-conditional means, not a fixed roster, without selection adjustment. All 1,182 episodes completed; the success guardrail was not certified. Appendix M provides details and descriptive same-task results.

Interactive open-weight airline workflows. On 49 τ^2 -bench tasks with two trials per arm, Qwen2.5-7B and Qwen3-4B each succeeded on 15/98 units. All 196 planned entries are retained, including two infrastructure failures. Appendix N reconciles 206 attempts, a serving-policy amendment, descriptive contrasts and a masked-replay illustration. These batch observations do not establish equivalence or live stopping gains. The earlier incomplete telecom pilot is retained in Appendix H.

5.1 Informative delays and partial outcomes

A separate frozen simulation isolates an asymmetric measurement pipeline. Both systems succeed with probability 0.90; their lognormal cost scales are equal under the null and have ratio 0.55 under the alternative. Failures and expensive traces from A are reported late, even when the systems have identical outcome distributions. We enroll 100 pairs per tick, up to 6,000, and reveal all outcomes within 20 ticks of enrollment. This directly simulates the balanced oriented score law, without running agents or assigning production users. Each of 1,000 repetitions per scenario is shared by three methods: completed-only selection, completed prefixes, and partial-score prefix inference. The two valid methods use the same candidate prefixes, positive bets, and same-prefix conjunction of preference superiority and success noninferiority at margin 0.03. Missing bits admit both outcomes; unrevealed cost signs admit all signs. The bounds do not infer hidden values from the informative reveal clock.

Under identical outcomes, completed-only selection falsely deployed in 1000 of 1,000 repetitions, whereas each valid method deployed in 6 (0.6%; Wilson 95% interval, 0.275–1.303%). Under the cheaper alternative, both valid methods deployed in 997 of 1,000 repetitions. Partial evidence reduced mean capped decision time from 41.285 to 22.363 ticks; the paired gain was 18.922 (Monte Carlo standard error 0.033). Mean initiated executions fell from 8130.8 to 4459.6. No partial decision occurred later than its comparator, and all 997 deployment paths were strictly earlier. Identical final decisions after complete revelation are guaranteed by the matched prefix construction, not evidence of universally high power. The magnitude of the gain depends on this particular reveal mechanism.

Certificates from actual archived prefixes. We replayed all nine retained τ^2 source files, comprising 3,336 episodes and 51,247 assistant messages. With final labels hidden until a terminal marker and pending resources bounded only by accrued values, 3,426 of 10,008 off-diagonal comparisons (34.2%) had a guaranteed sign before the later terminal marker. Of all comparisons, 25.9% resolved while at least one actual assistant message remained unseen; the rest of the early cases preceded only the artificial terminal marker. Every one of 195,171 prefix intervals contained the archived final sign. The replay uses ordinal message ticks, not observed concurrent time, and does not test a sequential deployment rule or estimate execution savings. Appendix F reports every contrast and the completion-set audit.

Decision objectives and grader errors. A separate 500-repetition ablation on each of six scenarios compares success-only, component-only, guarded-win, and fixed weighted-utility rules. These test different objectives. With identical agents, component-only noninferiority qualifies 78.4% of streams while guarded win qualifies 0.2%: satisfying component margins does not establish a preference improvement. The fixed utility $0.8S + 0.1C + 0.1/(1 + \text{cost})$ approves the compliance-regression scenario in 32.6% of runs, correctly reflecting its positive utility target; adding component requirements reduces this to zero. No rule is uniformly more powerful across different objectives. Guarded bounded-efficiency superiority matches guarded win in both deployment rate and mean capped pair count in the efficiency-gain and joint-gain cases; these cases show no decision-speed advantage for the hierarchical objective over that component-based rule. Appendix G explains the objectives; the supplementary CSV tables retain all comparisons and population Pareto descriptions.

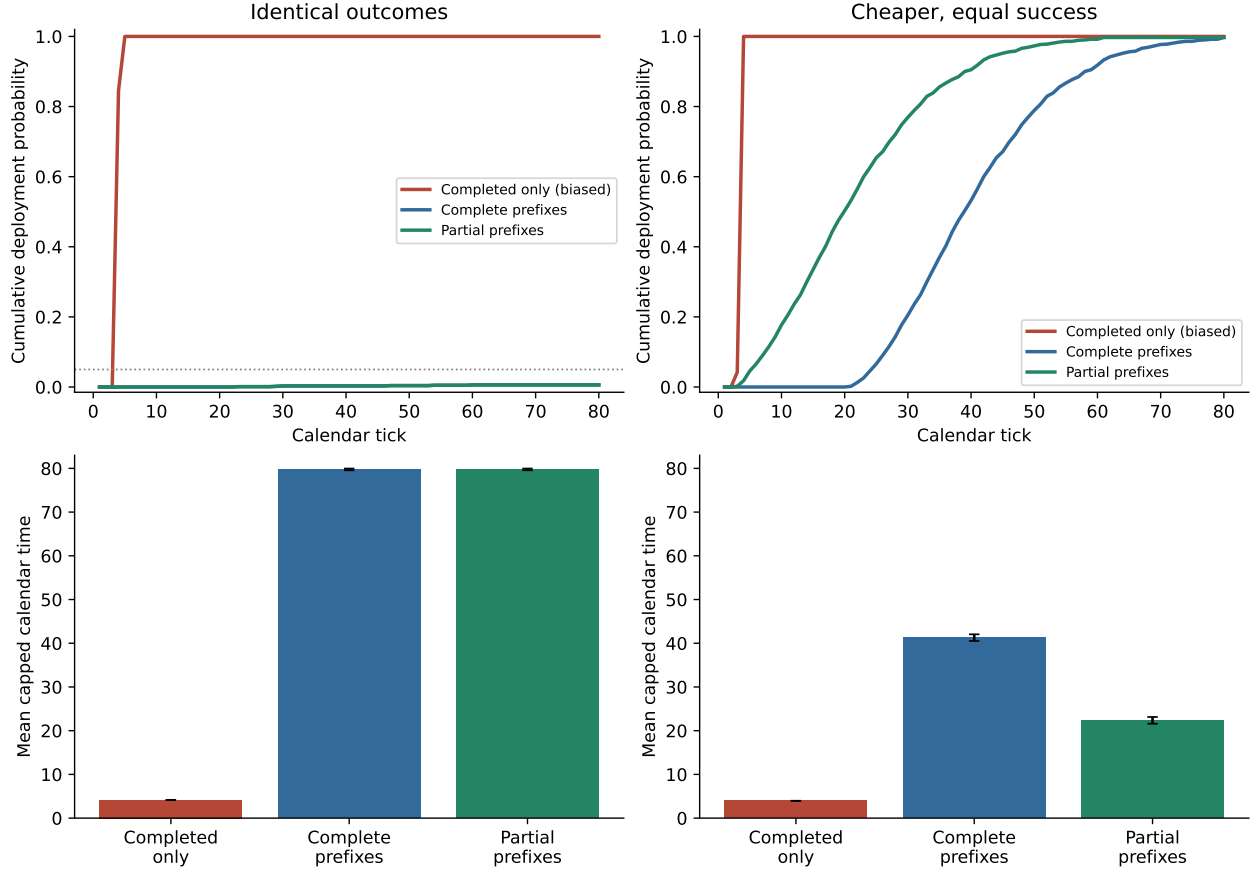


Figure 2: Informative-delay score simulation. Partial-score prefix inference retains the complete-data threshold guarantee while using incomplete episodes. Completed-only selection targets a biased subset. Calendar ticks and cost units are synthetic. Curves show the fraction that has deployed, using the same latent draws for all methods.

Four additional cases perturb success grading. With 5% false-positive errors for A and 5% false-negative errors for B , a true success contrast of -0.04 becomes $+0.012$ measured. Measured-label guarded inference approves 489/500 streams (97.8%), while true-label inference approves none. A conservative rule using the specified error bounds also approves none. Conversely, adverse differential grading prevents detection of a genuine efficiency gain. Optional-stopping validity for measured outcomes cannot repair a biased definition of success. The error bounds are known simulation inputs, not empirically validated grader guarantees.

An established likelihood-mixture reference. A separate eight-scenario comparison uses the Dirichlet-mixture construction for categorical data (Lindon and Malek, 2022), with a fixed uniform prior and separate tests of the three raw gate scores. All methods share complete iid pairs, targets, thresholds and looks. With a fresh fixed seed and 2,000 repetitions, guarded DM has zero null deployments and 60.1% efficiency-gain deployments, versus 0.6% and 96.6% for guarded betting. Both detect the joint gain in every repetition. These are results of a separately reproduced comparison, not replacements for the primary study. Appendix I gives all eight scenarios, the likelihood derivation, and the narrower iid categorical assumptions. This reference is not substituted into partial-score betting, since its evidence is not coordinatewise monotone in the observed scores.

Competitive sequential comparison and drift. A separate equal-execution-budget comparison includes all-pairs Wald, three alpha-spending designs, and projection-Gaussian monitoring. At the rare-compliance boundary, the last method rejected the component gate in 7.25% of 10,000 repetitions but deployed under the simultaneous guarded rule in 1.83%; those are different error events. Its asymptotic guarantee does not promise finite-sample 5% control from the first look. In an independently reproduced drift extension, guarded betting falsely deployed in 0.55% of 10,000 common-drift null streams, versus 26.86% for repeated Wald. Appendices K–L report the matched comparisons, uncertainty, moving targets and power costs.

6 Related work and scope

Generalized pairwise comparisons (Buyse, 2010) and the clinical win ratio (Pocock et al., 2012) establish the ordered-outcome construction. Clustered win-statistic inference is also developed (Fang et al., 2026); benchmark tasks with both systems observed are not parallel-arm randomized clinical clusters. Sequential derived-win designs (Zhang and Wu, 2024; Bergemann and Hanson, 2026) and recent anytime-valid U-statistic methods (Cai et al., 2026) are direct methodological precedents. Manole and Ramdas (2023, Section 4.2) also describes a finite-sample confidence-sequence route for bounded symmetric U-statistics under i.i.d. sampling using reverse martingales. Its generic displayed construction is one-sample; it is not directly our two-arm antisymmetric kernel. Our disjoint-pair construction trades some information available to all-pairs estimators for a simple randomized score and explicit finite-sample monitoring. We do not establish its efficiency relative to every sequential U-statistic method.

Two recent win-statistic proposals address nearby concerns. Li et al. (2026) tests benefit under every prespecified hierarchy or threshold rule using an intersection–union argument and asymptotic fixed-sample inference. Our conjunction uses separate outcome-component requirements and continuously monitored evidence; the intersection–union principle itself is established. McCoy et al. (2026) replaces reach-weighted tier aggregation with prespecified weights on stage-conditional effects, explicitly limiting lower-tier influence. That changes the composite estimand; it does not impose our requirements on raw population success or compliance differences. A positive reweighted composite can still fail such a requirement, as illustrated in Appendix J. We claim neither discovery of lower-tier dominance nor superiority to these different decision targets.

Anytime off-policy confidence sequences already support deployment gates (Karampatziakis et al., 2021). Combining superiority with noninferiority guardrails, including their intersection–union error logic, is established in product experimentation (Schultzberg et al., 2024). Our use of those ideas is specific to prioritized episode comparisons and component constraints. The agent-evaluation contribution must therefore be judged by the clarity of the design, the empirical consequences it reveals, and the usefulness of the complete protocol, rather than novelty of e-processes themselves. Delayed-outcome inference also depends on the target: Lindon and Kallus (2026) studies calendar-time cumulative rewards, whereas our bounds retain fixed-horizon enrollment-prefix outcomes. Historical benchmark outcomes remain measurements under their original harness and model configurations. A favorable comparison does not identify the module causing a gain or establish transport to production.

Huang (2026) already examines estimand-aware pairwise conclusions and utility-sensitive selections on public agent records, including SWE-bench and τ_2 -bench. Our additional focus is the hierarchical contrast under randomized observation, component constraints, and certified partial-outcome monitoring. We do not claim that target-dependent rankings or resource-sensitive selection are new.

Limitations. The primary synthetic model deliberately isolates compensation and monitoring; real work-flows have richer dependence, measurement error, and workload shifts. Benchmark cost records are historical charges, not current price quotes. An imperfect success or policy grader changes the measured target, and

rare severe failures require separate monitoring. Our component margins are illustrative, not elicited from application owners. All-pairs methods may use data more efficiently than disjoint pairs. Partial bounds can remain uninformative when outcomes cannot be certified early; our delay simulation uses one deliberately simple measurement pipeline and two outcome scenarios. The historical prefix audit validates certificate feasibility under an artificial message schedule; its operational latency and deployment value remain untested. Public retrospective traces and laboratory experiments do not constitute a randomized intervention among production users.

Reproducibility statement

The accompanying reproducibility code contains the comparator, monitoring procedures, simulation generators, analytic simulation targets, seed and source manifests, and result tables. Appendix A states the assumptions and complete proofs. Public-data analysis records original artifact locations, hashes, processing rules, and task-level uncertainty. Internal protocol amendments are distinguished from public preregistration. The full preprint includes all supplementary proofs and results after the references. Code and versioned evidence are available at <https://github.com/ykzeng-yale/ICLR-WinRatioAgentEval>; the accompanying archive records the exact released files.

Ethics statement

This work studies synthetic environments and public benchmark records. Deployment rules require externally justified preferences and safeguards; a favorable composite cannot certify absolute safety or fairness. Released materials exclude credentials and private user data. No live production users are assigned experimental agents in the reported historical reanalyses or synthetic studies.

AI use statement

AI assistants were used substantially in literature discovery, conceptual development, theorem and proof drafting, experiment design and implementation, interpretation, manuscript drafting, and internal scientific review. These reviews are model-assisted checks, not independent human peer review. The present development version does not assert that human verification of every result and citation has been completed.

References

- Jacob Austin, Augustus Odena, Maxwell Nye, Maarten Bosma, Henryk Michalewski, David Dohan, Ellen Jiang, Carrie Cai, Michael Terry, Quoc Le, and Charles Sutton. Program synthesis with large language models. *arXiv preprint arXiv:2108.07732*, 2021. URL <https://arxiv.org/abs/2108.07732>.
- Victor Barres, Honghua Dong, Soham Ray, Xujie Si, and Karthik Narasimhan. τ^2 -bench: Evaluating conversational agents in a dual-control environment, 2025. URL <https://arxiv.org/abs/2506.07982>. arXiv preprint.
- Tracy Bergemann and Tim Hanson. Group sequential methods for the win ratio, 2026. URL <https://arxiv.org/abs/2601.22525>. arXiv preprint.
- Marc Buyse. Generalized pairwise comparisons of prioritized outcomes in the two-sample problem. *Statistics in Medicine*, 29(30):3245–3257, 2010. doi: 10.1002/sim.3923. URL <https://doi.org/10.1002/sim.3923>.

- Leheng Cai, Qirui Hu, and Weijia Li. Asymptotic anytime-valid inference for U-statistics, 2026. URL <https://arxiv.org/abs/2605.14692>. arXiv preprint.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*, 2021. URL <https://arxiv.org/abs/2107.03374>.
- Yo Joong Choe and Aaditya Ramdas. Combining evidence across filtrations, 2024. URL <https://arxiv.org/abs/2402.09698>.
- Mathieu Even and Julie Josse. Rethinking the win ratio: A causal framework for hierarchical outcome analysis, 2025. URL <https://arxiv.org/abs/2501.16933v4>. arXiv preprint; version 4 revised March 23, 2026.
- Xi Fang, Guangyu Tong, Yuan Huang, F. Perry Wilson, Patrick J. Heagerty, and Fan Li. Statistical inference with win statistics in cluster-randomized trials with hierarchical composite outcomes, 2026. URL <https://arxiv.org/abs/2604.18341v2>. arXiv preprint; version 2 revised September 16, 2026.
- Jean Feng, Vishal Patel, Patrick Heagerty, Yifan Mai, Venkatesh Sivaraman, Patrick Vossler, Jialin Ouyang, and Anupam B. Jena. Expert evaluation of clinical AI tools on real point-of-care clinical queries, 2026. URL <https://arxiv.org/abs/2606.28960>. arXiv preprint.
- Alexander Henzi and Johanna F. Ziegel. Correction to: ‘valid sequential inference on probability forecast performance’. *Biometrika*, 109(4):1181–1182, 2022a. doi: 10.1093/biomet/asac043.
- Alexander Henzi and Johanna F. Ziegel. Valid sequential inference on probability forecast performance. *Biometrika*, 109(3):647–663, 2022b. doi: 10.1093/biomet/asab047.
- Steven R. Howard, Aaditya Ramdas, Jon McAuliffe, and Jasjeet Sekhon. Time-uniform, nonparametric, nonasymptotic confidence sequences. *The Annals of Statistics*, 49(2):1055–1080, 2021. doi: 10.1214/20-AOS1991. URL <https://arxiv.org/abs/1810.08240>.
- Wei-Jung Huang. What does an LLM-agent leaderboard rank actually compare?, 2026. URL <https://arxiv.org/abs/2609.07785v1>. Version 1, September 7, 2026.
- Sayash Kapoor, Benedikt Stroebel, Zachary S. Siegel, Nitya Nadgir, and Arvind Narayanan. AI agents that matter, 2024. URL <https://arxiv.org/abs/2407.01502>. Citing the verified 2024 arXiv version.
- Nikos Karampatziakis, Paul Mineiro, and Aaditya Ramdas. Off-policy confidence sequences. In *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*, pages 5301–5310. PMLR, 2021. URL <https://proceedings.mlr.press/v139/karampatziakis21a.html>.
- Kexuan Li, Xue Fan, and Lingli Yang. Worst-case win ratios under partially specified outcome hierarchies, 2026. URL <https://arxiv.org/abs/2608.29857v1>. Version 1, August 30, 2026.
- Michael Lindon and Nathan Kallus. Design-based anytime-valid inference for randomized experiments with delayed outcomes and staggered entry, 2026. URL <https://arxiv.org/abs/2603.25971>. Version 2, May 29, 2026.
- Michael Lindon and Alan Malek. Anytime-valid inference for multinomial count data. In *Advances in Neural Information Processing Systems*, volume 35, pages 2817–2831, 2022. URL https://proceedings.neurips.cc/paper_files/paper/2022/hash/12f3bd5d2b7d93eadc1bf508a0872dc2-Abstract-Conference.html.

- Tudor Manole and Aaditya Ramdas. Martingale methods for sequential estimation of convex functionals and divergences, 2023. URL <https://arxiv.org/abs/2103.09267v4>. Version 4, March 12, 2023.
- Lu Mao. On causal estimation using U-statistics. *Biometrika*, 105(1):215–220, 2018. doi: 10.1093/biomet/asx071. URL <https://doi.org/10.1093/biomet/asx071>.
- David McCoy, John Leopold, Shirley Galbiati, Minhthien Vu, and Bonnie Zhang. Priority-standardized net benefit: A stage-normalized estimand for hierarchical composite endpoints, 2026. URL <https://arxiv.org/abs/2607.22950v1>. Version 1, July 24, 2026.
- Stuart J. Pocock, Cono A. Ariti, Timothy J. Collier, and Duolao Wang. The win ratio: a new approach to the analysis of composite endpoints in clinical trials based on clinical priorities. *European Heart Journal*, 33(2): 176–182, 2012. doi: 10.1093/eurheartj/ehr352. URL <https://doi.org/10.1093/eurheartj/ehr352>.
- Aleksandr Podkopaev and Aaditya Ramdas. Sequential predictive two-sample and independence testing. In *Advances in Neural Information Processing Systems*, volume 36, 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/a72b207734d6112f6b47447e46be40e9-Abstract-Conference.html.
- Mårten Schultzberg, Sebastian Ankargren, and Mattias Frånberg. Risk-aware product decisions in A/B tests with multiple metrics, 2024. URL <https://arxiv.org/abs/2402.11609v1>. Version 1, February 18, 2024.
- Shubhanshu Shekhar and Aaditya Ramdas. Nonparametric two-sample testing by betting. *IEEE Transactions on Information Theory*, 70(2):1178–1203, 2024. doi: 10.1109/TIT.2023.3305867. URL <https://arxiv.org/abs/2112.09162v6>. See also the 2025 correction and corrected arXiv version 6.
- Ian Waudby-Smith and Aaditya Ramdas. Estimating means of bounded random variables by betting. *Journal of the Royal Statistical Society Series B: Statistical Methodology*, 86(1):1–27, 2024. doi: 10.1093/jrsssb/qkad009. URL <https://academic.oup.com/jrsssb/article/86/1/1/7043257>.
- Ian Waudby-Smith, David Arbour, Ritwik Sinha, Edward H. Kennedy, and Aaditya Ramdas. Time-uniform central limit theory and asymptotic confidence sequences, 2024. URL <https://arxiv.org/abs/2103.06476v9>. Version 9, revised March 14, 2024.
- John Yang, Carlos E. Jimenez, Alexander Wettig, Kilian Lieret, Shunyu Yao, Karthik Narasimhan, and Ofir Press. SWE-agent: Agent-computer interfaces enable automated software engineering. In *Advances in Neural Information Processing Systems*, volume 37, 2024. URL https://proceedings.neurips.cc/paper_files/paper/2024/hash/5a7c947568c1b1328ccc5230172e1e7c-Abstract-Conference.html.
- Baoshan Zhang and Yuan Wu. Sequential design with derived win statistics, 2024. URL <https://arxiv.org/abs/2410.06281>. arXiv preprint.