



Strict completion versus numerical-value agreement

Linux: single

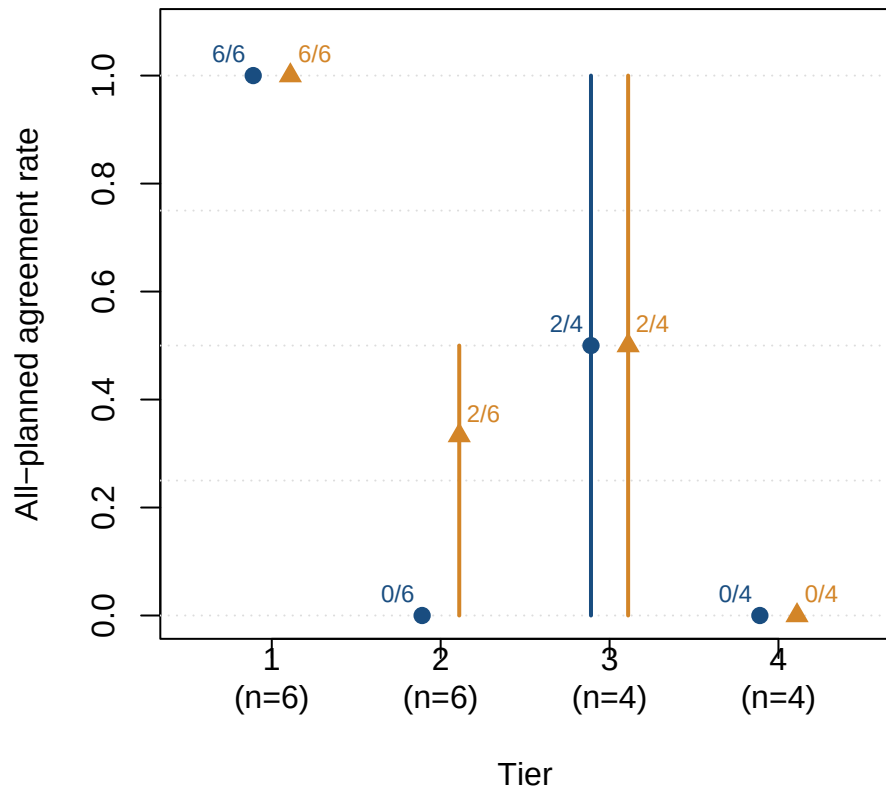

Linux: multi

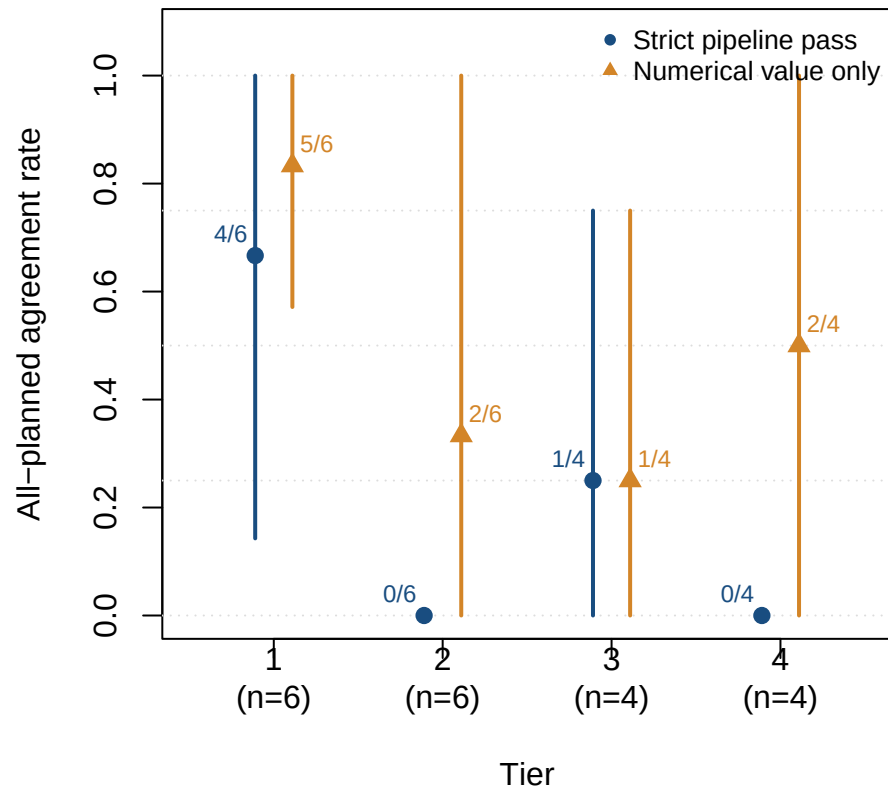

Numerical agreement includes incomplete responses. Bars: exploratory declared-family bootstrap 95% intervals.

Only one attempt per task/mode; selected public tasks, no general-capability inference.