


图片生成教程

火山方舟

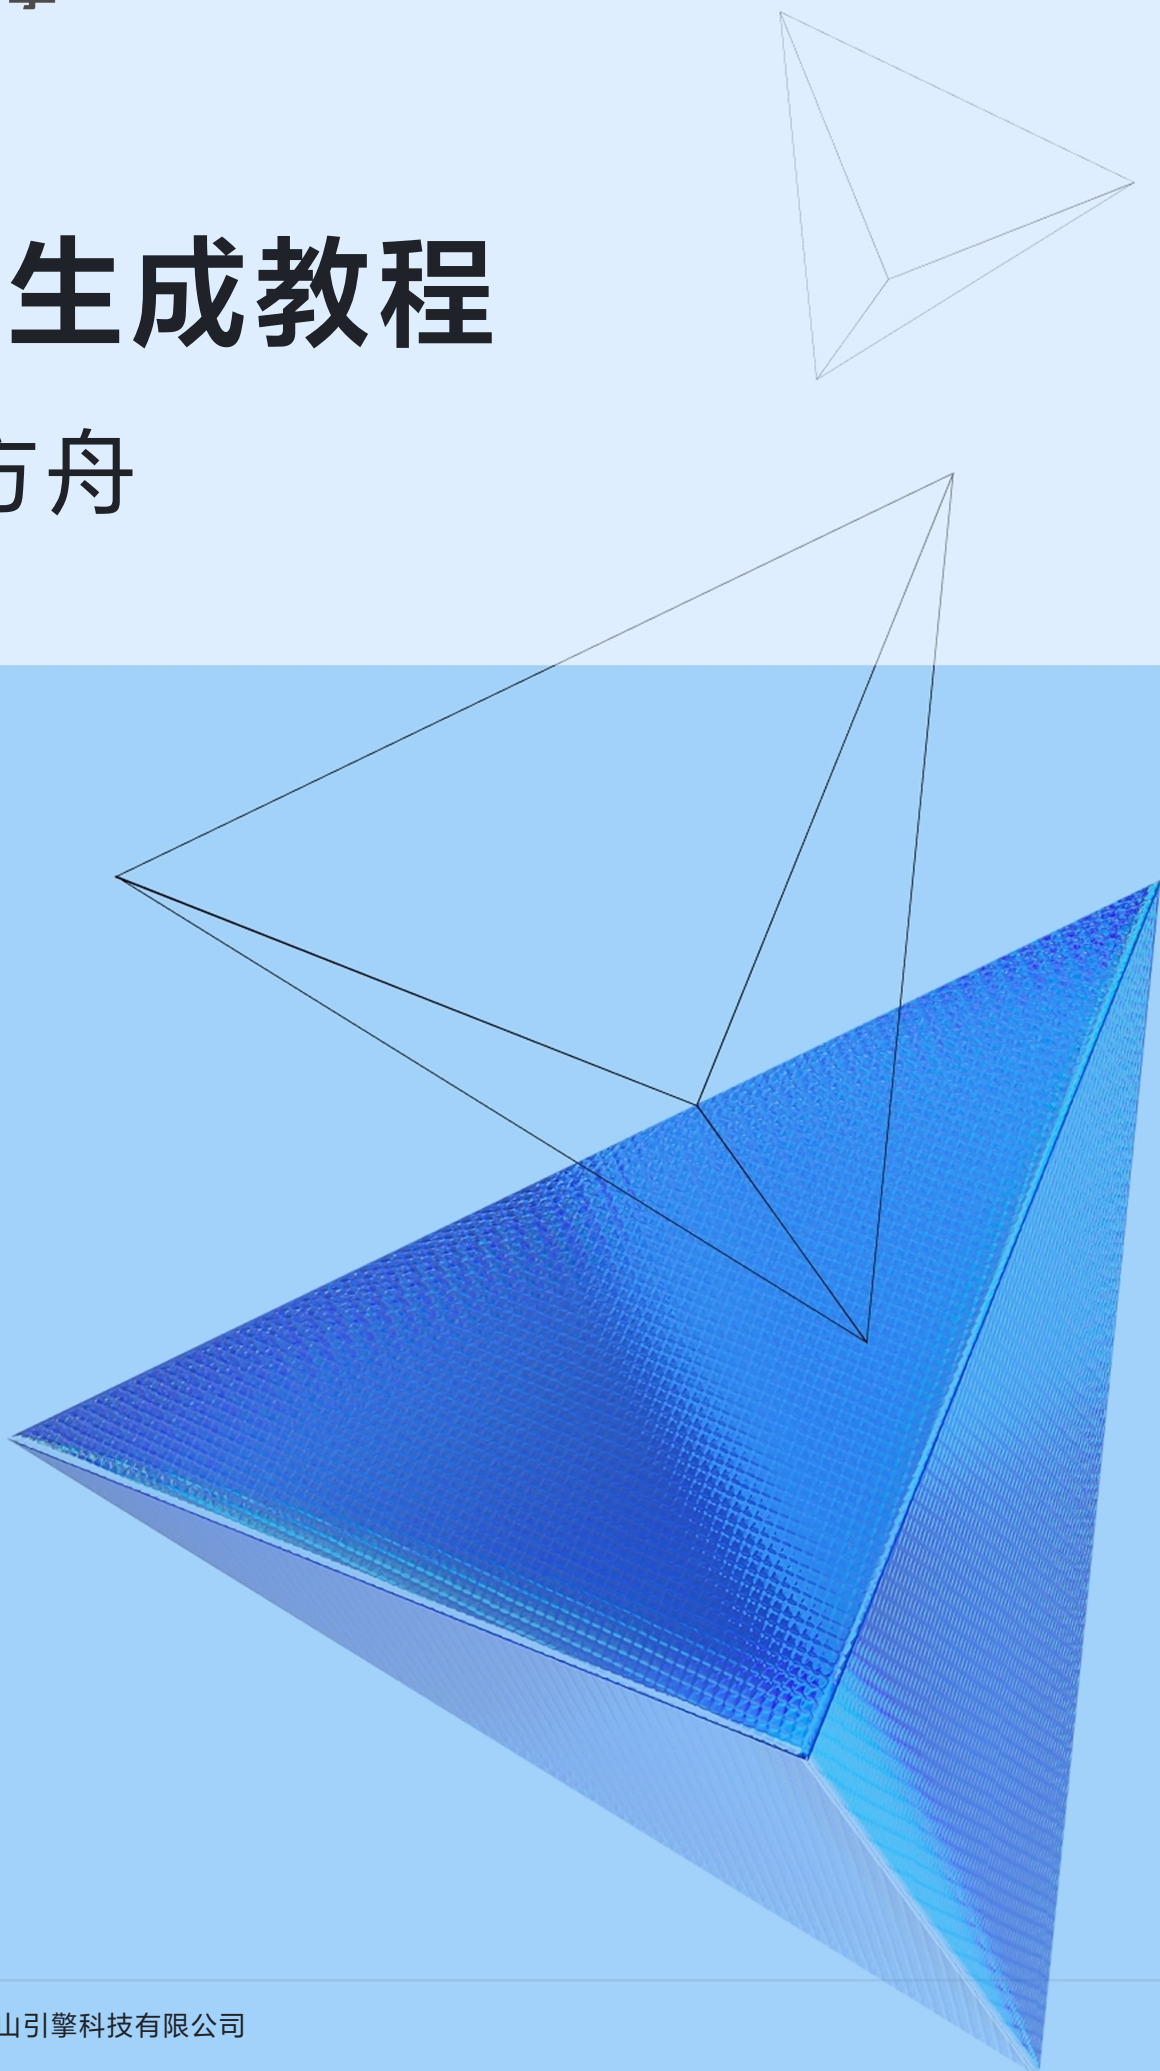

法律声明

本《火山方舟》的所有内容，包括但不限于文字、商标、架构、图示、图片、页面布局等，其知识产权（著作权、商标权、专利权、商业秘密等）归属于北京火山引擎科技有限公司及其关联公司（火山引擎），非经火山引擎书面同意，任何个人和组织不得复制、使用、修改、转发或以任何违反本《火山方舟》所承载的目的进行传播。

本《火山方舟》陈述内容仅作为产品的通用性介绍和参考性指引，火山引擎保留按“现状”和“当前可用”的形式提供产品和服务的权利。火山引擎不对本《火山方舟》中所载的产品功能、性质、质量、标准等内容进行明示或默示的保证和承诺，最终以您与火山引擎实际签署的协议为准。

如您发现本《火山方舟》有任何错误或歧义，或发现有对本《火山方舟》、产品本身的侵权行为，请与火山引擎取得联系。

联系方式：service@volcengine.com, 400-850-0030
(周一至周五 10:00-18:00)

目录

法律声明-----1

目录-----1

1. 图片生成教程-----1

1. 图片生成教程

Doubao Seedream 系列模型原生支持文本、单图和多图输入，实现基于主体一致性的多图融合创作、图像编辑、组图生成等多样玩法，让图像创作更加自由可控。本文以 Doubao Seedream 5.0 lite（以下简称 Seedream 5.0 lite）为例介绍如何调用 [Image generation API](#) 进行图像创作。如需使用 Doubao Seedream 5.0 pro（以下简称 Seedream 5.0 pro）/ Doubao Seedream 4.5（以下简称 Seedream 4.5）/ Doubao Seedream 4.0（以下简称 Seedream 4.0）模型，将下文代码示例中的 model 字段替换为对应的 Model ID 即可。

新模型上线

Seedream 5.0 pro（Model ID: `doubao-seedream-5-0-pro-260628`）已上线，面向高精度图片编辑场景，提供更精准的位置与元素控制能力。支持通过坐标、框选、箭头等多种方式指定编辑位置来精准编辑图片；支持原生多语种生成。详情参见：[Doubao Seedream 5.0 pro 教程](#)。

模型效果

更多效果示例见 [效果预览](#)。

场景	输入	输出
交互编辑 Seedream 5.0 pro 支持通过标记指定编辑区域，模型识别标记范围并生成内容，自然融入原有场景。	 根据手绘草图对图像进行编辑。在左下角标记区域添加一叠真实的杂志或艺术画册，并在右侧标记区域添加一个带杯碟的陶瓷杯咖啡。移除所有草图线条。保持构图不变。	
文生图 联网搜索 Seedream 5.0 lite 模型可通过联网搜索功能，融合	制作一张上海未来5日的天气预报图，采用现代扁平化插画风格，清晰展示每日天气、温度和穿搭建议。整体为横向排版，标题为“上海未来5日天	

场景	输入	输出
实时网络信息，提升生图时效性。	气预报”，包含5个等宽的垂直卡片，从左到右依次排列。整体风格为现代、干净、友好的扁平化矢量插画风格，线条清晰，色彩柔和。人物形象采用年轻男女的卡通插画，表情自然，姿态放松，服装细节清晰。	
多参考图生图 输入多张参考图，融合它们的风格、元素等特征来生成新图像。	 将图1的服装换为图2的服装	
组图生成 基于用户输入的文字和图片，生成一组内容关联的图像	 参考图1，生成四图片，图中人物分别带着墨镜，骑着摩托，带着帽子，拿着棒棒糖	

模型能力

以下为 Seedream 系列各版本模型的能力与参数对比，帮助您根据业务需求选择合适的模型。

模型名称		Seedream 5.0 pro 🔗	Seedream 5.0 lite 🔗	Seedream 4.5 🔗	Seedream 4.0 🔗
模型 ID (Model ID)		doubao-seedream-5-0-pro-260628	doubao-seedream-5-0-260128 (同时支持: doubao-seedream-5-0-lite-260128)	doubao-seedream-4-5-251128	doubao-seedream-4-0-250828
文生图		✓	✓	✓	✓
文生组图		暂不支持	✓	✓	✓
单 / 多图生图		✓	✓	✓	✓
单 / 多图生组图		暂不支持	✓	✓	✓
交互编辑		✓	✗	✗	✗
流式输出		暂不支持	✓	✓	✓
联网搜索		暂不支持	✓	✗	✗
模型参数	分辨率	1K, 2K	2K, 3K, 4K	2K, 4K	1K, 2K, 4K
	输出格式	png, jpeg	png, jpeg	jpeg	jpeg
	提示词优化模式	标准模式, 极速模式	标准模式	标准模式	标准模式, 极速模式
	生成数量	支持生成单图/多张图层	输入的参考图数量 + 最终生成的图片数量 ≤ 15张		
限流 IPM (张 / 分钟)		500	500	500	500

快速体验

您可在火山方舟平台 [API Explorer](#) [🔗](#)，快速体验图片生成功能，支持自定义参数（例如设置图片水印、控制输出图片大小等），方便您直观感受其效果和性能。

ImageGenerations

文字生成图片

服务Regioncn-beijing

推荐参数

预设参数，一键填写

Doubao / 多图融合

只看必填

API Key: *****取消 修改

* model string

图片生成模型的 Model ID

doubao-seedream-4-0-250828

* prompt string

文本提示词

将图1的服装换为图2的服装

image array

输入的图片信息

发起调试

全部清空

文档说明 调试结果 SDK示例 调用历史

发起调试等同于请求真实调用，可能产生云产品费用，请谨慎操作！

调试结果: 200 请求耗时: 16294ms

响应结果 响应头 请求数据

```
1 {
2   "model": "doubao-seedream-4-0-250828",
3   "created": 1771989143,
4   "data": [
5     {
6       "url": "https://ark-content-generation-v2-cn-beijing.volces.com/doubao-seedream-4-0-021771989127369075fa595c6758671c356a37890ddc711e6a50a_0.jpeg?X-Tos-Algorithm=T054-HMAC-SHA256&X-Tos-Credential=AKLTyWJkZTEsNjA1ZDUyNDc3YzhjNTM5OGIyNjBhNDcyOTQ%2F20260225%2F-cn-beijing%2Ftos%2Frequest&X-Tos-Date=20260225T031223Z&X-Tos-Expires=86400&X-Tos-Signature=dd5a420471490e23aa672ef06d59f7d11a3c89e6104eed3f40aa5c924206476f&X-Tos-SignedHeaders=host",
7     }
8   ],
9   "usage": {
10     "generated_images": 1,
11     "output_tokens": 16384,
12     "total_tokens": 16384
13   }
14 }
15 }
```

基础使用

文生图（纯文本输入单图输出）

通过给模型提供清晰准确的文字指令，即可快速获得符合描述的高质量单张图片。

提示词	输出
充满活力的特写编辑肖像，模特眼神犀利，头戴雕塑感帽子，色彩拼接丰富，眼部焦点锐利，景深较浅，具有Vogue杂志封面的美学风格，采用中画幅拍摄，工作室灯光效果强烈。	

Curl

```
curl https://ark.cn-beijing.volces.com/api/v3/images/generations \
-H "Content-Type: application/json" \
-H "Authorization: Bearer $ARK_API_KEY" \
-d '{
```

```
Bash "model": "doubao-seedream-5-0-lite-260128",  
      "prompt": "充满活力的特写编辑肖像，模特眼神犀利，头戴雕塑感帽子，色彩拼接丰富，眼部焦点锐利，景深较浅，具有Vogue杂志封面的美学风格，采用中画幅拍摄，工作室灯光效果强烈。",  
      "size": "2K",  
      "output_format": "png",  
      "watermark": false  
    }'
```

· 您可按需替换 Model ID。Model ID 查询见 [模型列表](#)。

Python

Python

```
import os  
# Install SDK: pip install 'volcengine-python-sdk[ark]' .  
from volcenginesdkarkruntime import Ark  
  
client = Ark(  
    # The base URL for model invocation  
    base_url="https://ark.cn-beijing.volces.com/api/v3",  
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey  
    api_key=os.getenv('ARK_API_KEY'),  
)  
  
imagesResponse = client.images.generate(  
    # Replace with Model ID  
    model="doubao-seedream-5-0-lite-260128",  
    prompt="充满活力的特写编辑肖像，模特眼神犀利，头戴雕塑感帽子，色彩拼接丰富，眼部焦点锐利，景深较浅，具有Vogue杂志封面的美学风格，采用中画幅拍摄，工作室灯光效果强烈。",  
    size="2K",  
    output_format="png",  
    response_format="url",  
    watermark=False  
)  
  
print(imagesResponse.data[0].url)
```

Java

```
package com.ark.sample;  
  
import com.volcengine.ark.runtime.model.images.generation.*;
```



```
Java
import com.volcengine.ark.runtime.service.ArkService;
import okhttp3.ConnectionPool;
import okhttp3.Dispatcher;

import java.util.Arrays;
import java.util.List;
import java.util.concurrent.TimeUnit;

public class ImageGenerationsExample {
    public static void main(String[] args) {
        // Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
        String apiKey = System.getenv("ARK_API_KEY");
        ConnectionPool connectionPool = new ConnectionPool(5, 1, TimeUnit.SECONDS);
        Dispatcher dispatcher = new Dispatcher();
        ArkService service = ArkService.builder()
            .baseUrl("https://ark.cn-beijing.volces.com/api/v3") // The base URL for model invocation
            .dispatcher(dispatcher)
            .connectionPool(connectionPool)
            .apiKey(apiKey)
            .build();

        GenerateImagesRequest generateRequest = GenerateImagesRequest.builder()
            .model("doubao-seedream-5-0-lite-260128") // Replace with Model ID
            .prompt("充满活力的特写编辑肖像，模特眼神犀利，头戴雕塑感帽子，色彩拼接丰富，眼部焦点锐利，景深较浅，具有Vogue杂志封面的美学风格，采用中画幅拍摄，工作室灯光效果强烈。")
            .size("2K")
            .sequentialImageGeneration("disabled")
            .outputFormat("png")
            .responseFormat(ResponseFormat.Url)
            .stream(false)
            .watermark(false)
            .build();

        ImagesResponse imagesResponse = service.generateImages(generateRequest);
        System.out.println(imagesResponse.getData().get(0).getUrl());

        service.shutdownExecutor();
    }
}
```

Go

```
package main
```

```
Go import (
    "context"
    "fmt"
    "os"

    "github.com/volcengine/volcengine-go-sdk/service/arkruntime"
    "github.com/volcengine/volcengine-go-sdk/service/arkruntime/model"
    "github.com/volcengine/volcengine-go-sdk/volcengine"
)

func main() {
    client := arkruntime.NewClientWithApiKey(
        // Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
        os.Getenv("ARK_API_KEY"),
        // The base URL for model invocation
        arkruntime.WithBaseUrl("https://ark.cn-beijing.volces.com/api/v3"),
    )
    ctx := context.Background()
    outputFormat := model.OutputFormatPNG

    generateReq := model.GenerateImagesRequest{
        Model:      "doubao-seedream-5-0-lite-260128", // Replace with Model ID
        Prompt:      "充满活力的特写编辑肖像，模特眼神犀利，头戴雕塑感帽子，色彩拼接丰富，眼部焦点锐利，景深较浅，具有Vogue杂志封面的美学风格，采用中画幅拍摄，工作室灯光效果强烈。",
        Size:        volcengine.String("2K"),
        OutputFormat: &outputFormat,
        ResponseFormat: volcengine.String("url"),
        Watermark:    volcengine.Bool(false),
    }

    imagesResponse, err := client.GenerateImages(ctx, generateReq)
    if err != nil {
        fmt.Printf("generate images error: %v\n", err)
        return
    }

    fmt.Printf("%s\n", *imagesResponse.Data[0].Url)
}
```

OpenAI

Python

```
import os
from openai import OpenAI

client = OpenAI(
    # The base URL for model invocation
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
)

imagesResponse = client.images.generate(
    # Replace with Model ID
    model="doubao-seedream-5-0-lite-260128",
    prompt="充满活力的特写编辑肖像，模特眼神犀利，头戴雕塑感帽子，色彩拼接丰富，眼部焦点锐利，景深较浅，具有Vogue杂志封面的美学风格，采用中画幅拍摄，工作室灯光效果强烈。",
    size="2K",
    output_format="png",
    response_format="url",
    extra_body={
        "watermark": False,
    },
)

print(imagesResponse.data[0].url)
```

图文生图（单图输入单图输出）

基于已有图片，结合文字指令进行图像编辑，包括图像元素增删、风格转化、材质替换、色调迁移、改变背景/视角/尺寸等。

提示词	输入图	输出
保持模特姿势和液态服装的流动形状不变。将服装材质从银色金属改为完全透明的清水（或玻璃）。透过液态水流，可以看到模特的皮肤细节。光影从反射变为折射。		

Curl

Bash

```
curl https://ark.cn-beijing.volces.com/api/v3/images/generations \
-H "Content-Type: application/json" \
-H "Authorization: Bearer $ARK_API_KEY" \
-d '{
  "model": "doubao-seedream-5-0-lite-260128",
  "prompt": "保持模特姿势和液态服装的流动形状不变。将服装材质从银色金属改为完全透明的清水（或玻璃）。透过液态水流，可以看到模特的皮肤细节。光影从反射变为折射。",
  "image": "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_5_imageToimage.png",
  "size": "2K",
  "output_format": "png",
  "watermark": false
}'
```

- 您可按需替换 Model ID。Model ID 查询见 [模型列表](#)。

Python

Python

```
import os
# Install SDK: pip install 'volcengine-python-sdk[ark]'
from volcenginesdkarkruntime import Ark

client = Ark(
    # The base URL for model invocation
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
)

imagesResponse = client.images.generate(
    # Replace with Model ID
    model="doubao-seedream-5-0-lite-260128",
    prompt="保持模特姿势和液态服装的流动形状不变。将服装材质从银色金属改为完全透明的清水（或玻璃）。透过液态水流，可以看到模特的皮肤细节。光影从反射变为折射。",
    image="https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_5_imageToimage.png",
    size="2K",
    output_format="png",
    response_format="url",
    watermark=False
)

print(imagesResponse.data[0].url)
```

Java

```
package com.ark.sample;

import com.volcengine.ark.runtime.model.images.generation.*;
import com.volcengine.ark.runtime.service.ArkService;
import okhttp3.ConnectionPool;
import okhttp3.Dispatcher;

import java.util.Arrays;
import java.util.List;
import java.util.concurrent.TimeUnit;

public class ImageGenerationsExample {
    public static void main(String[] args) {
```

```

Java String apiKey = System.getenv("ARK_API_KEY");
    ConnectionPool connectionPool = new ConnectionPool(5, 1, TimeUnit.SECONDS);
    Dispatcher dispatcher = new Dispatcher();
    ArkService service = ArkService.builder()
        .baseUrl("https://ark.cn-beijing.volces.com/api/v3") // The base URL for model invocation
        .dispatcher(dispatcher)
        .connectionPool(connectionPool)
        .apiKey(apiKey)
        .build();

    GenerateImagesRequest generateRequest = GenerateImagesRequest.builder()
        .model("doubao-seedream-5-0-lite-260128") // Replace with Model ID
        .prompt("保持模特姿势和液态服装的流动形状不变。将服装材质从银色金属改为完全透明的清水（或玻璃）。透过液态水流，可以看到模特的皮肤细节。光影从反射变为折射。")
        .image("https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_5_imageToimage.png")
        .size("2K")
        .sequentialImageGeneration("disabled")
        .outputFormat("png")
        .responseFormat(ResponseFormat.Url)
        .stream(false)
        .watermark(false)
        .build();

    ImagesResponse imagesResponse = service.generateImages(generateRequest);
    System.out.println(imagesResponse.getData().get(0).getUrl());

    service.shutdownExecutor();
}
}

```

Go

```

package main

import (
    "context"
    "fmt"
    "os"

    "github.com/volcengine/volcengine-go-sdk/service/arkruntime"
    "github.com/volcengine/volcengine-go-sdk/service/arkruntime/model"
    "github.com/volcengine/volcengine-go-sdk/volcengine"
)

```



```
Go
func main() {
    client := arkruntime.NewClientWithApiKey(
        os.Getenv("ARK_API_KEY"),
        // The base URL for model invocation
        arkruntime.WithBaseUrl("https://ark.cn-beijing.volces.com/api/v3"),
    )
    ctx := context.Background()
    outputFormat := model.OutputFormatPNG

    generateReq := model.GenerateImagesRequest{
        Model:      "doubao-seedream-5-0-lite-260128",
        Prompt:      "保持模特姿势和液态服装的流动形状不变。将服装材质从银色金属改为完全透明的清水（或玻璃）。透过液态水流，可以看到模特的皮肤细节。光影从反射变为折射。",
        Image:        volcengine.String("https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_5_imageToimage.png"),
        Size:         volcengine.String("2K"),
        OutputFormat: &outputFormat,
        ResponseFormat: volcengine.String("url"),
        Watermark:    volcengine.Bool(false),
    }

    imagesResponse, err := client.GenerateImages(ctx, generateReq)
    if err != nil {
        fmt.Printf("generate images error: %v\n", err)
        return
    }

    fmt.Printf("%s\n", *imagesResponse.Data[0].Url)
}
```

OpenAI

```
import os
from openai import OpenAI

client = OpenAI(
    # The base URL for model invocation
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
)

imagesResponse = client.images.generate(
```

```
Pythonmodel="doubao-seedream-5-0-lite-260128",
prompt="保持模特姿势和液态服装的流动形状不变。将服装材质从银色金属改为完全透明的清水（或玻璃）。透过液态水流，可以看到模特的皮肤细节。光影从反射变为折射。",
size="2K",
output_format="png",
response_format="url",
extra_body = {
    "image": "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_5_imageToimage.png",
    "watermark": False
}
)

print(imagesResponse.data[0].url)
```

多图融合（多图输入单图输出）

根据您输入的文本描述和多张参考图片，融合它们的风格、元素等特征来生成新图像。如衣裤鞋帽与模特图融合成穿搭图，人物与风景融合为人物风景图等。

提示词	输入图1	输入图2	输出
将图1的服装换为图2的服装			

Curl

```
curl https://ark.cn-beijing.volces.com/api/v3/images/generations \
-H "Content-Type: application/json" \
-H "Authorization: Bearer $ARK_API_KEY" \
-d '{
  "model": "doubao-seedream-5-0-lite-260128",
  "prompt": "将图1的服装换为图2的服装",
  "image": ["https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimage_1.png", "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_5_imagesToimage_2.png"],
  "size": "2K",
  "output_format": "png",
}
```

```
Bash "watermark": false
}
```

- 您可按需替换 Model ID。Model ID 查询见 [模型列表](#)。

Python

Python

```
import os
# Install SDK: pip install 'volcengine-python-sdk[ark]'
from volcenginesdkarkruntime import Ark

client = Ark(
    # The base URL for model invocation
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
)
imagesResponse = client.images.generate(
    # Replace with Model ID
    model="doubao-seedream-5-0-lite-260128",
    prompt="将图1的服装换为图2的服装",
    image=["https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimage_1.png", "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_5_imagesToimage_2.png"],
    size="2K",
    output_format="png",
    response_format="url",
    watermark=False
)

print(imagesResponse.data[0].url)
```

Java

```
package com.ark.sample;
```

```
import com.volcengine.ark.runtime.model.images.generation.*;
import com.volcengine.ark.runtime.service.ArkService;
import okhttp3.ConnectionPool;
import okhttp3.Dispatcher;
```

```
Java
import java.util.Arrays;
import java.util.List;
import java.util.concurrent.TimeUnit;

public class ImageGenerationsExample {
    public static void main(String[] args) {
        String apiKey = System.getenv("ARK_API_KEY");
        ConnectionPool connectionPool = new ConnectionPool(5, 1, TimeUnit.SECONDS);
        Dispatcher dispatcher = new Dispatcher();
        ArkService service = ArkService.builder()
            .baseUrl("https://ark.cn-beijing.volces.com/api/v3") // The base URL for model invocation
            .dispatcher(dispatcher)
            .connectionPool(connectionPool)
            .apiKey(apiKey)
            .build();

        GenerateImagesRequest generateRequest = GenerateImagesRequest.builder()
            .model("doubao-seedream-5-0-lite-260128") // Replace with Model ID
            .prompt("将图1的服装换为图2的服装")
            .image(Arrays.asList(
                "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimage_1.png",
                "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_5_imagesToimage_2.png"
            ))
            .size("2K")
            .sequentialImageGeneration("disabled")
            .outputFormat("png")
            .responseFormat(ResponseFormat.Url)
            .stream(false)
            .watermark(false)
            .build();

        ImagesResponse imagesResponse = service.generateImages(generateRequest);
        System.out.println(imagesResponse.getData().get(0).getUrl());

        service.shutdownExecutor();
    }
}
```

Go

```
package main
```

```
import (
```

```
Go "context"
    "fmt"
    "os"

    "github.com/volcengine/volcengine-go-sdk/service/arkruntime"
    "github.com/volcengine/volcengine-go-sdk/service/arkruntime/model"
    "github.com/volcengine/volcengine-go-sdk/volcengine"
)

func main() {
    client := arkruntime.NewClientWithApiKey(
        os.Getenv("ARK_API_KEY"),
        // The base URL for model invocation
        arkruntime.WithBaseUrl("https://ark.cn-beijing.volces.com/api/v3"),
    )
    ctx := context.Background()
    outputFormat := model.OutputFormatPNG

    generateReq := model.GenerateImagesRequest{
        Model:      "doubao-seedream-5-0-lite-260128",
        Prompt:      "将图1的服装换为图2的服装",
        Image:      []string{
            "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimage_1.png",
            "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_5_imagesToimage_2.png",
        },
        Size:        volcengine.String("2K"),
        OutputFormat: &outputFormat,
        ResponseFormat: volcengine.String("url"),
        Watermark:    volcengine.Bool(false),
    }

    imagesResponse, err := client.GenerateImages(ctx, generateReq)
    if err != nil {
        fmt.Printf("generate images error: %v\n", err)
        return
    }

    fmt.Printf("%s\n", *imagesResponse.Data[0].Url)
}
```

OpenAI

Python

```
import os
from openai import OpenAI

client = OpenAI(
    # The base URL for model invocation
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
)

imagesResponse = client.images.generate(
    model="doubao-seedream-5-0-lite-260128",
    prompt="将图1的服装换为图2的服装",
    size="2K",
    output_format="png",
    response_format="url",
    extra_body = {
        "image": ["https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimage_1.png", "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_5_imagesToimage_2.png"],
        "watermark": False,
    }
)

print(imagesResponse.data[0].url)
```

组图输出（多图输出）

Seedream 5.0 pro 不支持该能力。

支持通过一张或者多张图片 and 文字信息，生成漫画分镜、品牌视觉等一组内容关联的图片。
需指定参数 `sequential_image_generation` 为 `auto`。

文生组图

提示词	输出（实际会输出4张图片）
生成一组电影级科幻写实风的4张影视分镜： 场景1为宇航员在空间站维修飞船，空间站外部精密机械结构，深邃星空+银河背景，宇航员身穿细节完整的白色宇航服，手持专业维修工具，专注检修飞船外壳，中全景构图，侧逆光勾勒轮廓，冷色调科幻光影，空间站灯光点缀，失重环境，金属质感细腻，画面静谧严谨。 场景2为：突然遇到陨石带袭击，广角史诗镜	

提示词	输出（实际会输出4张图片）
头，大量大小不一的陨石高速袭来，陨石表面纹理清晰，带燃烧尾焰，动态模糊体现速度感，陨石带压迫感拉满，飞船与空间站在画面一侧，太空黑暗深邃，光影强烈对比，紧张灾难氛围，画面冲击力十足。 场景3为：宇航员紧急躲避，近景动态抓拍，宇航员失重状态下极速侧身躲避，肢体动作张力拉满，伸手抓握固定扶手，背景陨石飞掠而过，轻微镜头晃动增强临场感，宇航服褶皱、管线细节清晰，急促紧张，冷冽光影，主体突出不杂乱。 场景4为：受伤后惊险逃回飞船，中近景叙事镜头，宇航员宇航服带轻微破损划痕，略显狼狈却坚毅，踉跄冲向开启的飞船舱门，舱内暖光与太空冷光形成对比，背景陨石逐渐远去，惊险逃生氛围，细节真实，情绪饱满。	

Curl

Bash

```
curl https://ark.cn-beijing.volces.com/api/v3/images/generations \
-H "Content-Type: application/json" \
-H "Authorization: Bearer $ARK_API_KEY" \
-d '{
  "model": "doubao-seedream-5-0-lite-260128",
  "prompt": "生成一组电影级科幻写实风的4张影视分镜：场景1为宇航员在空间站维修飞船，空间站外部精密机械结构，深邃星空+银河背景，宇航员身穿细节完整的白色宇航服，手持专业维修工具，专注检修飞船外壳，中全景构图，侧逆光勾勒轮廓，冷色调科幻光影，空间站灯光点缀，失重环境，金属质感细腻，画面静谧严谨。场景2为：突然遇到陨石带袭击，广角史诗镜头，大量大小不一的陨石高速袭来，陨石表面纹理清晰，带燃烧尾焰，动态模糊体现速度感，陨石带压迫感拉满，飞船与空间站在画面一侧，太空黑暗深邃，光影强烈对比，紧张灾难氛围，画面冲击力十足。场景3为：宇航员紧急躲避，近景动态抓拍，宇航员失重状态下极速侧身躲避，肢体动作张力拉满，伸手抓握固定扶手，背景陨石飞掠而过，轻微镜头晃动增强临场感，宇航服褶皱、管线细节清晰，急促紧张，冷冽光影，主体突出不杂乱。场景4为：受伤后惊险逃回飞船，中近景叙事镜头，宇航员宇航服带轻微破损划痕，略显狼狈却坚毅，踉跄冲向开启的飞船舱门，舱内暖光与太空冷光形成对比，背景陨石逐渐远去，惊险逃生氛围，细节真实，情绪饱满。",
  "size": "2K",
  "sequential_image_generation": "auto",
  "sequential_image_generation_options": {
    "max_images": 4
  },
  "stream": false,
  "output_format": "png",
  "response_format": "url",
  "watermark": false
}'
```

· 您可按需替换 Model ID。Model ID 查询见 [模型列表](#)。

Python

```
import os
# Install SDK: pip install 'volcengine-python-sdk[ark]'
from volcenginesdkarkruntime import Ark
from volcenginesdkarkruntime.types.images.images import SequentialImageGenerationOptions

client = Ark(
    # The base URL for model invocation .
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
```


)
Python

```
imagesResponse = client.images.generate(  
    # Replace with Model ID  
    model="doubao-seedream-5-0-lite-260128",  
    prompt="生成一组电影级科幻写实风的4张影视分镜：场景1为宇航员在空间站维修飞船，空间站外部精密机械结构，深邃星空 + 银河背景，宇航员身穿细节完整的白色宇航服，手持专业维修工具，专注检修飞船外壳，中全景构图，侧逆光勾勒轮廓，冷色调科幻光影，空间站灯光点缀，失重环境，金属质感细腻，画面静谧严谨。场景2为：突然遇到陨石带袭击，广角史诗镜头，大量大小不一的陨石高速袭来，陨石表面纹理清晰，带燃烧尾焰，动态模糊体现速度感，陨石带压迫感拉满，飞船与空间站在画面一侧，太空黑暗深邃，光影强烈对比，紧张灾难氛围，画面冲击力十足。场景3为：宇航员紧急躲避，近景动态抓拍，宇航员失重状态下极速侧身躲避，肢体动作张力拉满，伸手抓握固定扶手，背景陨石飞掠而过，轻微镜头晃动增强临场感，宇航服褶皱、管线细节清晰，急促紧张，冷冽光影，主体突出不杂乱。场景4为：受伤后惊险逃回飞船，中近景叙事镜头，宇航员宇航服带轻微破损划痕，略显狼狈却坚毅，踉跄冲向开启的飞船舱门，舱内暖光与太空冷光形成对比，背景陨石逐渐远去，惊险逃生氛围，细节真实，情绪饱满。",  
    size="2K",  
    sequential_image_generation="auto",  
    sequential_image_generation_options=SequentialImageGenerationOptions(max_images=4),  
    output_format="png",  
    response_format="url",  
    watermark=False  
)  
  
# Iterate through all image data  
for image in imagesResponse.data:  
    # Output the current image's URL and size  
    print(f"URL: {image.url}, Size: {image.size}")
```

Java

```
package com.ark.sample;  
  
import com.volcengine.ark.runtime.model.images.generation.*;  
import com.volcengine.ark.runtime.service.ArkService;  
import okhttp3.ConnectionPool;  
import okhttp3.Dispatcher;  
  
import java.util.Arrays;  
import java.util.List;  
import java.util.concurrent.TimeUnit;  
  
public class ImageGenerationsExample {
```

```
public static void main(String[] args) {  
    String apiKey = System.getenv("ARK_API_KEY");  
    ConnectionPool connectionPool = new ConnectionPool(5, 1, TimeUnit.SECONDS);  
    Dispatcher dispatcher = new Dispatcher();  
    ArkService service = ArkService.builder()  
        .baseUrl("https://ark.cn-beijing.volces.com/api/v3") // The base URL for model invocation  
        .dispatcher(dispatcher)  
        .connectionPool(connectionPool)  
        .apiKey(apiKey)  
        .build();
```

```
    GenerateImagesRequest.SequentialImageGenerationOptions  
    sequentialImageGenerationOptions = new  
    GenerateImagesRequest.SequentialImageGenerationOptions();  
    sequentialImageGenerationOptions.setMaxImages(4);  
    GenerateImagesRequest generateRequest = GenerateImagesRequest.builder()  
        .model("doubao-seedream-5-0-lite-260128") // Replace with Model ID  
        .prompt("生成一组电影级科幻写实风的4张影视分镜：场景1为宇航员在空间站维修飞船，  
空间站外部精密机械结构，深邃星空 + 银河背景，宇航员身穿细节完整的白色宇航服，手持专业维修工具，  
专注检修飞船外壳，中全景构图，侧逆光勾勒轮廓，冷色调科幻光影，空间站灯光点缀，失重环境，  
金属质感细腻，画面静谧严谨。场景2为：突然遇到陨石带袭击，广角史诗镜头，大量大小不一的陨石高速袭来，  
陨石表面纹理清晰，带燃烧尾焰，动态模糊体现速度感，陨石带压迫感拉满，飞船与空间站在画面一侧，  
太空黑暗深邃，光影强烈对比，紧张灾难氛围，画面冲击力十足。场景3为：宇航员紧急躲避，近景动态抓拍，  
宇航员失重状态下极速侧身躲避，肢体动作张力拉满，伸手抓握固定扶手，背景陨石飞掠而过，  
轻微镜头晃动增强临场感，宇航服褶皱、管线细节清晰，急促紧张，冷冽光影，主体突出不杂乱。场景4为：受伤后惊险逃回飞船，  
中近景叙事镜头，宇航员宇航服带轻微破损划痕，略显狼狈却坚毅，踉跄冲向开启的飞船舱门，舱内暖光与太空冷光形成对比，  
背景陨石逐渐远去，惊险逃生氛围，细节真实，情绪饱满。")  
        .size("2K")  
        .sequentialImageGeneration("auto")  
        .sequentialImageGenerationOptions(sequentialImageGenerationOptions)  
        .outputFormat("png")  
        .responseFormat(ResponseFormat.Url)  
        .stream(false)  
        .watermark(false)  
        .build();  
    ImagesResponse imagesResponse = service.generateImages(generateRequest);  
    // Iterate through all image data  
    if (imagesResponse != null && imagesResponse.getData() != null) {  
        for (int i = 0; i < imagesResponse.getData().size(); i++) {  
            // Retrieve image information  
            String url = imagesResponse.getData().get(i).getUrl();  
            String size = imagesResponse.getData().get(i).getSize();  
            System.out.printf("Image %d:%n", i + 1);  
            System.out.printf(" URL: %s%n", url);  
            System.out.printf(" Size: %s%n", size);  
            System.out.println();
```

```
Java    }

        service.shutdownExecutor();
    }
}
}
```

Go

```
package main
```

```
import (
```

```
    "context"
```

```
    "fmt"
```

```
    "os"
```

```
    "github.com/volcengine/volcengine-go-sdk/service/arkruntime"
```

```
    "github.com/volcengine/volcengine-go-sdk/service/arkruntime/model"
```

```
    "github.com/volcengine/volcengine-go-sdk/volcengine"
```

```
)
```

```
func main() {
```

```
    client := arkruntime.NewClientWithApiKey(
```

```
        os.Getenv("ARK_API_KEY"),
```

```
        // The base URL for model invocation
```

```
        arkruntime.WithBaseUrl("https://ark.cn-beijing.volces.com/api/v3"),
```

```
    )
```

```
    ctx := context.Background()
```

```
    outputFormat := model.OutputFormatPNG
```

```
    var sequentialImageGeneration model.SequentialImageGeneration = "auto"
```

```
    maxImages := 4
```

```
    generateReq := model.GenerateImagesRequest{
```

```
        Model:      "doubao-seedream-5-0-lite-260128",
```

```
        Prompt:      "生成一组电影级科幻写实风的4张影视分镜：场景1为宇航员在空间站维修飞船，空间站外部精密机械结构，深邃星空+银河背景，宇航员身穿细节完整的白色宇航服，手持专业维修工具，专注检修飞船外壳，中全景构图，侧逆光勾勒轮廓，冷色调科幻光影，空间站灯光点缀，失重环境，金属质感细腻，画面静谧严谨。场景2为：突然遇到陨石带袭击，广角史诗镜头，大量大小不一的陨石高速袭来，陨石表面纹理清晰，带燃烧尾焰，动态模糊体现速度感，陨石带压迫感拉满，飞船与空间站在画面一侧，太空黑暗深邃，光影强烈对比，紧张灾难氛围，画面冲击力十足。场景3为：宇航员紧急躲避，近景动态抓拍，宇航员失重状态下极速侧身躲避，肢体动作张力拉满，伸手抓握固定扶手，背景陨石飞掠而过，轻微镜头晃动增强临场感，宇航服褶皱、管线细节清晰，急促紧张，冷冽光影，主体突出不杂乱。场景4为：受伤后惊险逃回飞船，中近景
```

Go 叙事镜头，宇航员宇航服带轻微破损划痕，略显狼狈却坚毅，踉跄冲向开启的飞船舱门，舱内暖光与太空冷光形成对比，背景陨石逐渐远去，惊险逃生氛围，细节真实，情绪饱满。”，

```

    Size:      volcengine.String("2K"),
    OutputFormat: &outputFormat,
    ResponseFormat: volcengine.String("url"),
    Watermark:   volcengine.Bool(false),
    SequentialImageGeneration: &sequentialImageGeneration,
    SequentialImageGenerationOptions: &model.SequentialImageGenerationOptions{
        MaxImages: &maxImages,
    },
}

resp, err := client.GenerateImages(ctx, generateReq)
if err != nil {
    fmt.Printf("call GenerateImages error: %v\n", err)
    return
}

if resp.Error != nil {
    fmt.Printf("API returned error: %s - %s\n", resp.Error.Code, resp.Error.Message)
    return
}

// Output the generated image information
fmt.Printf("Generated %d images:\n", len(resp.Data))
for i, image := range resp.Data {
    var url string
    if image.Url != nil {
        url = *image.Url
    } else {
        url = "N/A"
    }
    fmt.Printf("Image %d: Size: %s, URL: %s\n", i+1, image.Size, url)
}
}

```

OpenAI

```

import os
from openai import OpenAI

client = OpenAI(
    # The base URL for model invocation .
    base_url="https://ark.cn-beijing.volces.com/api/v3",

```

```
Python# Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
api_key=os.getenv('ARK_API_KEY'),
)

imagesResponse = client.images.generate(
    model="doubao-seedream-5-0-lite-260128",
    prompt="生成一组电影级科幻写实风的4张影视分镜：场景1为宇航员在空间站维修飞船，空间站外部精密机械结构，深邃星空+银河背景，宇航员身穿细节完整的白色宇航服，手持专业维修工具，专注检修飞船外壳，中全景构图，侧逆光勾勒轮廓，冷色调科幻光影，空间站灯光点缀，失重环境，金属质感细腻，画面静谧严谨。场景2为：突然遇到陨石带袭击，广角史诗镜头，大量大小不一的陨石高速袭来，陨石表面纹理清晰，带燃烧尾焰，动态模糊体现速度感，陨石带压迫感拉满，飞船与空间站在画面一侧，太空黑暗深邃，光影强烈对比，紧张灾难氛围，画面冲击力十足。场景3为：宇航员紧急躲避，近景动态抓拍，宇航员失重状态下极速侧身躲避，肢体动作张力拉满，伸手抓握固定扶手，背景陨石飞掠而过，轻微镜头晃动增强临场感，宇航服褶皱、管线细节清晰，急促紧张，冷冽光影，主体突出不杂乱。场景4为：受伤后惊险逃回飞船，中近景叙事镜头，宇航员宇航服带轻微破损划痕，略显狼狈却坚毅，踉跄冲向开启的飞船舱门，舱内暖光与太空冷光形成对比，背景陨石逐渐远去，惊险逃生氛围，细节真实，情绪饱满。",
    size="2K",
    output_format="png",
    response_format="url",
    extra_body={
        "watermark": False,
        "sequential_image_generation": "auto",
        "sequential_image_generation_options": {
            "max_images": 4
        },
    },
)

# Iterate through all image data
for image in imagesResponse.data:
    # Output the current image's URL and size
    print(f"URL: {image.url}, Size: {image.size}")
```

单张图生组图

提示词	输入图	输出（实际会输出4张图片）
参考这个LOGO，做一套户外运动品牌视觉设计，品牌名称为“GREEN”，包括包装袋、帽子、卡片、挂绳等。绿色视觉主色调，趣味、简约现代风格。		

提示词	输入图	输出（实际会输出4张图片）
		

Curl

Bash

```
curl https://ark.cn-beijing.volces.com/api/v3/images/generations \
-H "Content-Type: application/json" \
-H "Authorization: Bearer $ARK_API_KEY" \
-d '{
  "model": "doubao-seedream-5-0-lite-260128",
  "prompt": "参考这个LOGO，做一套户外运动品牌视觉设计，品牌名称为“GREEN”，包括包装
袋、帽子、卡片、挂绳等。绿色视觉主色调，趣味、简约现代风格",
  "image": "https://ark-project.tos-cn-beijing.volces.com/doc_image/
seedream4_imageToimages.png",
  "size": "2K",
  "sequential_image_generation": "auto",
  "sequential_image_generation_options": {
    "max_images": 4
  },
  "stream": false,
  "output_format": "png",
  "response_format": "url",
  "watermark": false
}'
```

· 您可按需替换 Model ID。Model ID 查询见 [模型列表](#)。

Python

```
import os
# Install SDK: pip install 'volcengine-python-sdk[ark]'
from volcenginesdkarkruntime import Ark
from volcenginesdkarkruntime.types.images.images import SequentialImageGenerationOptions
```

```

Python
client = Ark(
    # The base URL for model invocation .
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
)

imagesResponse = client.images.generate(
    # Replace with Model ID .
    model="doubao-seedream-5-0-lite-260128",
    prompt="参考这个LOGO，做一套户外运动品牌视觉设计，品牌名称为“GREEN”，包括包装袋、帽子、卡片、挂绳等。绿色视觉主色调，趣味、简约现代风格",
    image="https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imageToimages.png",
    size="2K",
    sequential_image_generation="auto",
    sequential_image_generation_options=SequentialImageGenerationOptions(max_images=4),
    output_format="png",
    response_format="url",
    watermark=False
)

# Iterate through all image data
for image in imagesResponse.data:
    # Output the current image's URL and size
    print(f"URL: {image.url}, Size: {image.size}")

```

Java

```

package com.ark.sample;

import com.volcengine.ark.runtime.model.images.generation.*;
import com.volcengine.ark.runtime.service.ArkService;
import okhttp3.ConnectionPool;
import okhttp3.Dispatcher;

import java.util.Arrays;
import java.util.List;
import java.util.concurrent.TimeUnit;

public class ImageGenerationsExample {
    public static void main(String[] args) {
        String apiKey = System.getenv("ARK_API_KEY");

```

```

Java ConnectionPool connectionPool = new ConnectionPool(5, 1, TimeUnit.SECONDS);
Dispatcher dispatcher = new Dispatcher();
ArkService service = ArkService.builder()
    .baseUrl("https://ark.cn-beijing.volces.com/api/v3") // The base URL for model invocation
    .dispatcher(dispatcher)
    .connectionPool(connectionPool)
    .apiKey(apiKey)
    .build();

    GenerateImagesRequest.SequentialImageGenerationOptions
sequentialImageGenerationOptions = new
GenerateImagesRequest.SequentialImageGenerationOptions();
    sequentialImageGenerationOptions.setMaxImages(4);
    GenerateImagesRequest generateRequest = GenerateImagesRequest.builder()
        .model("doubao-seedream-5-0-lite-260128") // Replace with Model ID
        .prompt("参考这个LOGO，做一套户外运动品牌视觉设计，品牌名称为“GREEN”，包括包
        装袋、帽子、卡片、挂绳等。绿色视觉主色调，趣味、简约现代风格")
        .image("https://ark-project.tos-cn-beijing.volces.com/doc_image/
        seedream4_imageToimages.png")
        .size("2K")
        .sequentialImageGeneration("auto")
        .sequentialImageGenerationOptions(sequentialImageGenerationOptions)
        .outputFormat("png")
        .responseFormat(ResponseFormat.Url)
        .stream(false)
        .watermark(false)
        .build();
    ImagesResponse imagesResponse = service.generateImages(generateRequest);
    // Iterate through all image data
    if (imagesResponse != null && imagesResponse.getData() != null) {
        for (int i = 0; i < imagesResponse.getData().size(); i++) {
            // Retrieve image information
            String url = imagesResponse.getData().get(i).getUrl();
            String size = imagesResponse.getData().get(i).getSize();
            System.out.printf("Image %d:%n", i + 1);
            System.out.printf(" URL: %s%n", url);
            System.out.printf(" Size: %s%n", size);
            System.out.println();
        }

        service.shutdownExecutor();
    }
}
}
}

```


Go

```
package main

import (
    "context"
    "fmt"
    "os"

    "github.com/volcengine/volcengine-go-sdk/service/arkruntime"
    "github.com/volcengine/volcengine-go-sdk/service/arkruntime/model"
    "github.com/volcengine/volcengine-go-sdk/volcengine"
)

func main() {
    client := arkruntime.NewClientWithApiKey(
        os.Getenv("ARK_API_KEY"),
        // The base URL for model invocation
        arkruntime.WithBaseUrl("https://ark.cn-beijing.volces.com/api/v3"),
    )
    ctx := context.Background()
    outputFormat := model.OutputFormatPNG
    var sequentialImageGeneration model.SequentialImageGeneration = "auto"
    maxImages := 4

    generateReq := model.GeneratelImagesRequest{
        Model:      "doubao-seedream-5-0-lite-260128",
        Prompt:     "参考这个LOGO，做一套户外运动品牌视觉设计，品牌名称为“GREEN”，包括包装袋、帽子、卡片、挂绳等。绿色视觉主色调，趣味、简约现代风格",
        Image:      volcengine.String("https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imageToimages.png"),
        Size:       volcengine.String("2K"),
        OutputFormat: &outputFormat,
        ResponseFormat: volcengine.String("url"),
        Watermark:   volcengine.Bool(false),
        SequentialImageGeneration: &sequentialImageGeneration,
        SequentialImageGenerationOptions: &model.SequentialImageGenerationOptions{
            MaxImages: &maxImages,
        },
    }

    resp, err := client.GeneratelImages(ctx, generateReq)
    if err != nil {
        fmt.Printf("call GeneratelImages error: %v\n", err)
        return
    }
}
```

```
Go }

if resp.Error != nil {
    fmt.Printf("API returned error: %s - %s\n", resp.Error.Code, resp.Error.Message)
    return
}

// Output the generated image information
fmt.Printf("Generated %d images:\n", len(resp.Data))
for i, image := range resp.Data {
    var url string
    if image.Url != nil {
        url = *image.Url
    } else {
        url = "N/A"
    }
    fmt.Printf("Image %d: Size: %s, URL: %s\n", i+1, image.Size, url)
}
}
```

· 您可按需替换 Model ID。Model ID 查询见 [模型列表](#)。

OpenAI

```
import os
from openai import OpenAI

client = OpenAI(
    # The base URL for model invocation
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
)

imagesResponse = client.images.generate(
    model="doubao-seedream-5-0-lite-260128",
    prompt="参考这个LOGO，做一套户外运动品牌视觉设计，品牌名称为“GREEN”，包括包装袋、帽子、卡片、挂绳等。绿色视觉主色调，趣味、简约现代风格",
    size="2K",
    output_format="png",
    response_format="url",
    extra_body={
        "image": "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imageToimages.png",
        "watermark": False,
```

```
Python"sequential_image_generation": "auto",
    "sequential_image_generation_options": {
        "max_images": 4
    },
}
)

# Iterate through all image data
for image in imagesResponse.data:
    # Output the current image's URL and size
    print(f"URL: {image.url}, Size: {image.size}")
```

多参考图生组图

提示词	输入图1	输入图2	输出（实际会输出3张图片）
生成3张女孩和奶牛玩偶在游乐园开心地坐过山车的图片，涵盖早晨、中午、晚上			

Curl

```
curl https://ark.cn-beijing.volces.com/api/v3/images/generations \
-H "Content-Type: application/json" \
-H "Authorization: Bearer $ARK_API_KEY" \
-d '{
    "model": "doubao-seedream-5-0-lite-260128",
    "prompt": "生成3张女孩和奶牛玩偶在游乐园开心地坐过山车的图片，涵盖早晨、中午、晚上",
    "image": ["https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimages_1.png", "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimages_2.png"],
    "sequential_image_generation": "auto",
    "sequential_image_generation_options": {
        "max_images": 3
    },
    "size": "2K",
```

```
Bash
"output_format":"png",
"watermark": false
}
```

- 您可按需替换 Model ID。Model ID 查询见 [模型列表](#)。

Python

```
Python

import os
# Install SDK: pip install 'volcengine-python-sdk[ark]' .
from volcenginesdkarkruntime import Ark
from volcenginesdkarkruntime.types.images.images import SequentialImageGenerationOptions

client = Ark(
    # The base URL for model invocation
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
)

imagesResponse = client.images.generate(
    # Replace with Model ID
    model="doubao-seedream-5-0-lite-260128",
    prompt="生成3张女孩和奶牛玩偶在游乐园开心地坐过山车的图片，涵盖早晨、中午、晚上",
    image=["https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimages_1.png", "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimages_2.png"],
    size="2K",
    sequential_image_generation="auto",
    sequential_image_generation_options=SequentialImageGenerationOptions(max_images=3),
    output_format="png",
    response_format="url",
    watermark=False
)

# Iterate through all image data
for image in imagesResponse.data:
    # Output the current image's URL and size
    print(f"URL: {image.url}, Size: {image.size}")
```

Java

```
package com.ark.sample;

import com.volcengine.ark.runtime.model.images.generation.*;
import com.volcengine.ark.runtime.service.ArkService;
import okhttp3.ConnectionPool;
import okhttp3.Dispatcher;

import java.util.Arrays;
import java.util.List;
import java.util.concurrent.TimeUnit;

public class ImageGenerationsExample {
    public static void main(String[] args) {
        String apiKey = System.getenv("ARK_API_KEY");
        ConnectionPool connectionPool = new ConnectionPool(5, 1, TimeUnit.SECONDS);
        Dispatcher dispatcher = new Dispatcher();
        ArkService service = ArkService.builder()
            .baseUrl("https://ark.cn-beijing.volces.com/api/v3") // The base URL for model invocation
            .dispatcher(dispatcher)
            .connectionPool(connectionPool)
            .apiKey(apiKey)
            .build();

        GenerateImagesRequest.SequentialImageGenerationOptions
        sequentialImageGenerationOptions = new
        GenerateImagesRequest.SequentialImageGenerationOptions();
        sequentialImageGenerationOptions.setMaxImages(3);
        GenerateImagesRequest generateRequest = GenerateImagesRequest.builder()
            .model("doubao-seedream-5-0-lite-260128") // Replace with Model ID
            .prompt("生成3张女孩和奶牛玩偶在游乐园开心地坐过山车的图片，涵盖早晨、中午、晚上")
            .image(Arrays.asList(
                "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimages_1.png",
                "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimages_2.png"
            ))
            .outputFormat("png")
            .size("2K")
            .sequentialImageGeneration("auto")
            .sequentialImageGenerationOptions(sequentialImageGenerationOptions)

            .responseFormat(ResponseFormat.Url)
            .stream(false)
    }
}
```

```
Java    .watermark(false)
        .build();
    ImagesResponse imagesResponse = service.generateImages(generateRequest);

    // Iterate through all image data
    if (imagesResponse != null && imagesResponse.getData() != null) {
        for (int i = 0; i < imagesResponse.getData().size(); i++) {
            // Retrieve image information
            String url = imagesResponse.getData().get(i).getUrl();
            String size = imagesResponse.getData().get(i).getSize();
            System.out.printf("Image %d:%n", i + 1);
            System.out.printf("  URL: %s%n", url);
            System.out.printf("  Size: %s%n", size);
            System.out.println();
        }

        service.shutdownExecutor();
    }
}
```

Go

```
package main

import (
    "context"
    "fmt"
    "os"

    "github.com/volcengine/volcengine-go-sdk/service/arkruntime"
    "github.com/volcengine/volcengine-go-sdk/service/arkruntime/model"
    "github.com/volcengine/volcengine-go-sdk/volcengine"
)

func main() {
    client := arkruntime.NewClientWithApiKey(
        os.Getenv("ARK_API_KEY"),
        // The base URL for model invocation
        arkruntime.WithBaseUrl("https://ark.cn-beijing.volces.com/api/v3"),
    )
    ctx := context.Background()
    outputFormat := model.OutputFormatPNG
```

```
Go var sequentialImageGeneration model.SequentialImageGeneration = "auto"
    maxImages := 3

    generateReq := model.GenerateImagesRequest{
        Model:      "doubao-seedream-5-0-lite-260128",
        Prompt:     "生成3张女孩和奶牛玩偶在游乐园开心地坐过山车的图片，涵盖早晨、中午、晚上",
        Image:      []string{
            "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimages_1.png",
            "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimages_2.png",
        },

        Size:        volcengine.String("2K"),
        OutputFormat: &outputFormat,
        ResponseFormat: volcengine.String("url"),
        Watermark:    volcengine.Bool(false),
        SequentialImageGeneration: &sequentialImageGeneration,
        SequentialImageGenerationOptions: &model.SequentialImageGenerationOptions{
            MaxImages: &maxImages,
        },
    }

    resp, err := client.GenerateImages(ctx, generateReq)
    if err != nil {
        fmt.Printf("call GenerateImages error: %v\n", err)
        return
    }

    if resp.Error != nil {
        fmt.Printf("API returned error: %s - %s\n", resp.Error.Code, resp.Error.Message)
        return
    }

    // Output the generated image information
    fmt.Printf("Generated %d images:\n", len(resp.Data))
    for i, image := range resp.Data {
        var url string
        if image.Url != nil {
            url = *image.Url
        } else {
            url = "N/A"
        }
        fmt.Printf("Image %d: Size: %s, URL: %s\n", i+1, image.Size, url)
    }
}
```

OpenAI

Python

```
import os
from openai import OpenAI

client = OpenAI(
    # The base URL for model invocation
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
)

imagesResponse = client.images.generate(
    model="doubao-seedream-5-0-lite-260128",
    prompt="生成3张女孩和奶牛玩偶在游乐园开心地坐过山车的图片，涵盖早晨、中午、晚上",
    size="2K",
    output_format="png",
    response_format="url",
    extra_body={
        "image": ["https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimages_1.png", "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imagesToimages_2.png"],
        "watermark": False,
        "sequential_image_generation": "auto",
        "sequential_image_generation_options": {
            "max_images": 3
        },
    },
)

# Iterate through all image data
for image in imagesResponse.data:
    # Output the current image's URL and size
    print(f"URL: {image.url}, Size: {image.size}")
```

提示词建议

- 建议用 **简洁连贯** 的自然语言写明 **主体 + 行为 + 环境**，若对画面美学有要求，可用自然语言或短语补充 **风格、色彩、光影、构图** 等美学元素。详情可参见 [Seedream 4.0-5.0 提示词指南](#)。
- 文本提示词（prompt）建议不超过300个汉字或600个英文单词。字数过多信息容易分散，模型可能因此忽略细节，只关注重点，造成图片缺失部分元素。

进阶使用

联网搜索

- Seedream 5.0 pro 不支持该能力。
- Seedream 5.0 lite 支持调用联网搜索工具，通过配置 `tools.type` 参数为 `web_search` 即可开启联网搜索。
- 开启联网搜索后，模型会根据用户的提示词自主判断是否搜索互联网内容（如商品、天气等），提升生成图片的时效性，但也会增加一定的时延。
 - 实际搜索次数可通过字段 `usage.tool_usage.web_search` 查询，如果为 `0` 表示未搜索。

提示词	输出
制作一张上海未来5日的天气预报图，采用现代扁平化插画风格，清晰展示每日天气、温度和穿搭建议。整体为横向排版，标题为“上海未来5日天气预报”，包含5个等宽的垂直卡片，从左到右依次排列。整体风格为现代、干净、友好的扁平化矢量插画风格，线条清晰，色彩柔和。人物形象采用年轻男女的卡通插画，表情自然，姿态放松，服装细节清晰。	

Curl

Bash

```
curl https://ark.cn-beijing.volces.com/api/v3/images/generations \
-H "Content-Type: application/json" \
-H "Authorization: Bearer $ARK_API_KEY" \
-d '{
  "model": "doubao-seedream-5-0-lite-260128",
  "prompt": "制作一张上海未来5日的天气预报图，采用现代扁平化插画风格，清晰展示每日天气、温度和穿搭建议。整体为横向排版，标题为“上海未来5日天气预报”，包含5个等宽的垂直卡片，从左到右依次排列。整体风格为现代、干净、友好的扁平化矢量插画风格，线条清晰，色彩柔和。人物形象采用年轻男女的卡通插画，表情自然，姿态放松，服装细节清晰。",
  "size": "2048x2048",
  "tools": [
    {
      "type": "web_search"
    }
  ],
  "output_format": "png",
  "response_format": "url",
  "watermark": false
}'
```

- 您可按需替换 Model ID。Model ID 查询见 [模型列表](#)。

Python

Python

```
import os
# Install SDK: pip install 'volcengine-python-sdk[ark]' .
from volcenginesdkarkruntime import Ark
from volcenginesdkarkruntime.types.images.images import ContentGenerationTool

client = Ark(
    # The base URL for model invocation
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
)

imagesResponse = client.images.generate(
    # Replace with Model ID
    model="doubao-seedream-5-0-lite-260128",
    prompt="制作一张上海未来5日的天气预报图，采用现代扁平化插画风格，清晰展示每日天气、温度和穿搭建议。整体为横向排版，标题为“上海未来5日天气预报”，包含5个等宽的垂直卡片，从左到右依次排列。整体风格为现代、干净、友好的扁平化矢量插画风格，线条清晰，色彩柔和。人物形象采用年轻男女的卡通插画，表情自然，姿态放松，服装细节清晰。",
    size="2048x2048",
    output_format="png",
    response_format="url",
    tools=[ContentGenerationTool(type="web_search")],
    watermark=False,
)

print(imagesResponse.data[0].url)
```

Java

```
package com.ark.sample;

import com.volcengine.ark.runtime.model.images.generation.*;
import com.volcengine.ark.runtime.service.ArkService;
import okhttp3.ConnectionPool;
import okhttp3.Dispatcher;

import java.util.Arrays;
```

```
Java
import java.util.List;
import java.util.concurrent.TimeUnit;

public class ImageGenerationsExample {
    public static void main(String[] args) {
        // Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
        String apiKey = System.getenv("ARK_API_KEY");
        ConnectionPool connectionPool = new ConnectionPool(5, 1, TimeUnit.SECONDS);
        Dispatcher dispatcher = new Dispatcher();
        ArkService service = ArkService.builder()
            .baseUrl("https://ark.cn-beijing.volces.com/api/v3") // The base URL for model invocation
            .dispatcher(dispatcher)
            .connectionPool(connectionPool)
            .apiKey(apiKey)
            .build();

        // Create ContentGenerationTool
        GenerateImagesRequest.ContentGenerationTool contentGenerationTool = new
        GenerateImagesRequest.ContentGenerationTool();
        contentGenerationTool.setType("web_search");

        // Create list of tools
        List<GenerateImagesRequest.ContentGenerationTool> tools =
        Arrays.asList(contentGenerationTool);

        GenerateImagesRequest generateRequest = GenerateImagesRequest.builder()
            .model("doubao-seedream-5-0-lite-260128") // Replace with Model ID
            .prompt("制作一张上海未来5日的天气预报图，采用现代扁平化插画风格，清晰展示每日天气、温度和穿搭建议。整体为横向排版，标题为“上海未来5日天气预报”，包含5个等宽的垂直卡片，从左到右依次排列。整体风格为现代、干净、友好的扁平化矢量插画风格，线条清晰，色彩柔和。人物形象采用年轻男女的卡通插画，表情自然，姿态放松，服装细节清晰。")
            .size("2048x2048")
            .outputFormat("png")
            .responseFormat("url")
            .watermark(false)
            .tools(tools)
            .build();

        ImagesResponse imagesResponse = service.generateImages(generateRequest);
        System.out.println(imagesResponse.getData().get(0).getUrl());

        service.shutdownExecutor();
    }
}
```

Go

```
package main

import (
    "context"
    "fmt"
    "os"

    "github.com/volcengine/volcengine-go-sdk/service/arkruntime"
    "github.com/volcengine/volcengine-go-sdk/service/arkruntime/model"
    "github.com/volcengine/volcengine-go-sdk/volcengine"
)

func main() {
    client := arkruntime.NewClientWithApiKey(
        // Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
        os.Getenv("ARK_API_KEY"),
        // The base URL for model invocation
        arkruntime.WithBaseUrl("https://ark.cn-beijing.volces.com/api/v3"),
    )
    ctx := context.Background()
    outputFormat := model.OutputFormatPNG

    generateReq := model.GenerateImagesRequest{
        Model:      "doubao-seedream-5-0-lite-260128", // Replace with Model ID
        Prompt:      "制作一张上海未来5日的天气预报图，采用现代扁平化插画风格，清晰展示每日天气、温度和穿搭建议。整体为横向排版，标题为“上海未来5日天气预报”，包含5个等宽的垂直卡片，从左到右依次排列。整体风格为现代、干净、友好的扁平化矢量插画风格，线条清晰，色彩柔和。人物形象采用年轻男女的卡通插画，表情自然，姿态放松，服装细节清晰。",
        Size:        volcengine.String("2048x2048"),
        OutputFormat: &outputFormat,
        ResponseFormat: volcengine.String("url"),
        Watermark:    volcengine.Bool(false),
        Tools: []*model.ContentGenerationTool{
            {
                Type: model.ToolTypeWebSearch,
            },
        },
    }
    imagesResponse, err := client.GenerateImages(ctx, generateReq)
    if err != nil {
        fmt.Printf("generate images error: %v\n", err)
        return
    }
}
```


```
Go fmt.Printf("%s\n", *imagesResponse.Data[0].Url)
}
```

流式输出

Seedream 5.0 pro 不支持该能力。

模型支持流式图像生成，当生成完任一图片后即返回结果，让您能更快浏览到生成的图像，改善等待体验。

通过配置 **stream** 参数为 **true**，即可开启流式输出模式。

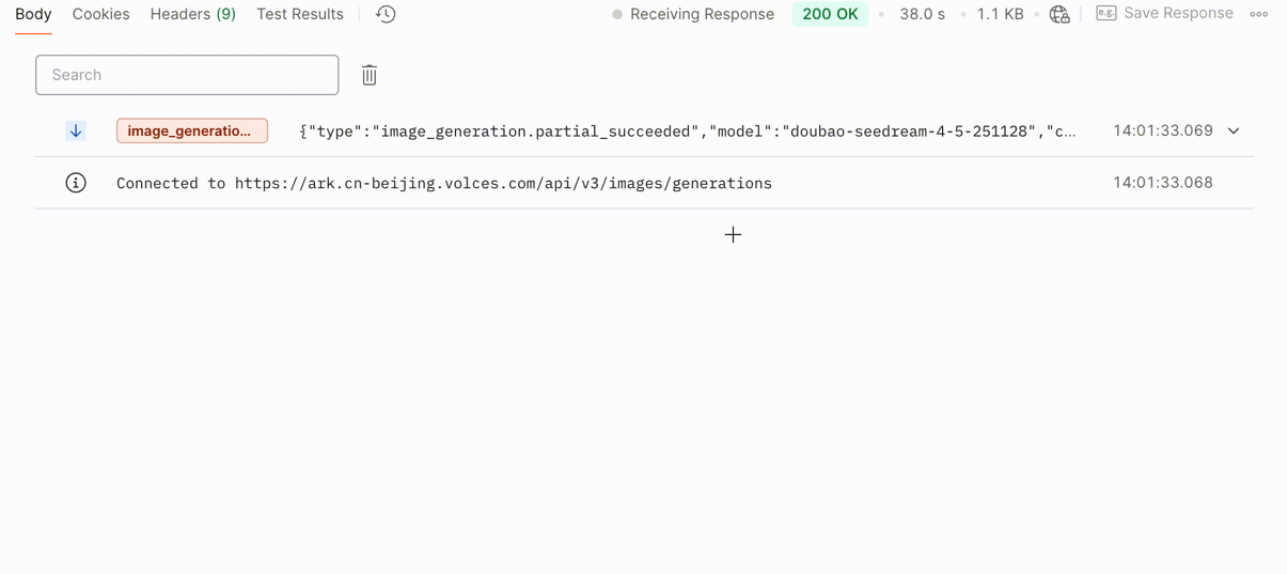

Curl

Bash

```
curl https://ark.cn-beijing.volces.com/api/v3/images/generations \
-H "Content-Type: application/json" \
-H "Authorization: Bearer $ARK_API_KEY" \
-d '{
  "model": "doubao-seedream-5-0-lite-260128",
  "prompt": "参考图1，生成四图片，图中人物分别带着墨镜，骑着摩托，带着帽子，拿着棒棒糖",
  "image": "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imageToimages_1.png",
  "sequential_image_generation": "auto",
  "sequential_image_generation_options": {
    "max_images": 4
  },
  "size": "2K",
  "stream": true,
  "output_format": "png",
  "watermark": false
}'
```

· 您可按需替换 Model ID。Model ID 查询见 [模型列表](#)。

Python

```
import os
# Install SDK: pip install 'volcengine-python-sdk[ark]'
from volcenginesdkarkruntime import Ark
from volcenginesdkarkruntime.types.images.images import SequentialImageGenerationOptions

client = Ark(
    # The base URL for model invocation
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
)

if __name__ == "__main__":
    stream = client.images.generate(
        # Replace with Model ID
        model="doubao-seedream-5-0-lite-260128",
        prompt="参考图1，生成四图片，图中人物分别带着墨镜，骑着摩托，带着帽子，拿着棒棒糖",
        image="https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imageToimages_1.png",
```

```
Python
size="2K",
sequential_image_generation="auto",
sequential_image_generation_options=SequentialImageGenerationOptions(max_images=4),
output_format="png",
response_format="url",
stream=True,
watermark=False
)
for event in stream:
    if event is None:
        continue
    if event.type == "image_generation.partial_failed":
        print(f"Stream generate images error: {event.error}")
        if event.error is not None and event.error.code.equal("InternalServerError"):
            break
    elif event.type == "image_generation.partial_succeeded":
        if event.error is None and event.url:
            print(f"recv.Size: {event.size}, recv.Url: {event.url}")
    elif event.type == "image_generation.completed":
        if event.error is None:
            print("Final completed event:")
            print("recv.Usage:", event.usage)
    elif event.type == "image_generation.partial_image":
        print(f"Partial image index={event.partial_image_index}, size={len(event.b64_json)}")
```

Java

```
package com.ark.sample;

import com.volcengine.ark.runtime.model.images.generation.*;
import com.volcengine.ark.runtime.service.ArkService;
import okhttp3.ConnectionPool;
import okhttp3.Dispatcher;

import java.util.Arrays;
import java.util.List;
import java.util.concurrent.TimeUnit;

public class ImageGenerationsExample {
    public static void main(String[] args) {
        String apiKey = System.getenv("ARK_API_KEY");
        ConnectionPool connectionPool = new ConnectionPool(5, 1, TimeUnit.SECONDS);
        Dispatcher dispatcher = new Dispatcher();
```

```
ArkService service = ArkService.builder()
    .baseUrl("https://ark.cn-beijing.volces.com/api/v3") // The base URL for model invocation
    .dispatcher(dispatcher)
    .connectionPool(connectionPool)
    .apiKey(apiKey)
    .build();

GenerateImagesRequest.SequentialImageGenerationOptions
sequentialImageGenerationOptions = new
GenerateImagesRequest.SequentialImageGenerationOptions();
sequentialImageGenerationOptions.setMaxImages(4);
GenerateImagesRequest generateRequest = GenerateImagesRequest.builder()
    .model("doubao-seedream-5-0-lite-260128") //Replace with Model ID .
    .prompt("参考图1，生成四图片，图中人物分别带着墨镜，骑着摩托，带着帽子，拿着棒
棒棒")
    .image("https://ark-project.tos-cn-beijing.volces.com/doc_image/
seedream4_imageToimages_1.png")
    .size("2K")
    .sequentialImageGeneration("auto")
    .sequentialImageGenerationOptions(sequentialImageGenerationOptions)
    .outputFormat("png")
    .responseFormat(ResponseFormat.Url)
    .stream(true)
    .watermark(false)
    .build();

service.streamGenerateImages(generateRequest)
    .doOnError(Throwables::printStackTrace)
    .blockingForEach(
        choice -> {
            if (choice == null) return;
            if ("image_generation.partial_failed".equals(choice.getType())) {
                if (choice.getError() != null) {
                    System.err.println("Stream generate images error: " + choice.getError());
                    if (choice.getError().getCode() != null &&
choice.getError().getCode().equals("InternalServerError")) {
                        throw new RuntimeException("Server error, terminating stream.");
                    }
                }
            }
            else if ("image_generation.partial_succeeded".equals(choice.getType())) {
                if (choice.getError() == null && choice.getUrl() != null && !choice.getUrl().isEmpty()) {
                    System.out.printf("recv.Size: %s, recv.Url: %s%n", choice.getSize(), choice.getUrl());
                }
            }
            else if ("image_generation.completed".equals(choice.getType())) {
                if (choice.getError() == null && choice.getUsage() != null) {

```



```
Java      System.out.println("recv.Usage: " + choice.getUsage().toString());
          }
        }
      }
    );
    service.shutdownExecutor();
  }
}
```

Go

```
package main

import (
    "context"
    "fmt"
    "io"
    "os"
    "strings"

    "github.com/volcengine/volcengine-go-sdk/service/arkruntime"
    "github.com/volcengine/volcengine-go-sdk/service/arkruntime/model"
    "github.com/volcengine/volcengine-go-sdk/volcengine"
)

func main() {
    client := arkruntime.NewClientWithApiKey(
        os.Getenv("ARK_API_KEY"),
        // The base URL for model invocation
        arkruntime.WithBaseUrl("https://ark.cn-beijing.volces.com/api/v3"),
    )
    ctx := context.Background()
    outputFormat := model.OutputFormatPNG
    var sequentialImageGeneration model.SequentialImageGeneration = "auto"
    maxImages := 4

    generateReq := model.GenerateImagesRequest{
        Model:    "doubao-seedream-5-0-lite-260128",
        Prompt:   "参考图1，生成四图片，图中人物分别带着墨镜，骑着摩托，带着帽子，拿着棒棒糖",
        Image:    volcengine.String("https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imageToimages_1.png"),
        Size:     volcengine.String("2K"),
        OutputFormat: &outputFormat,
    }
```

```
Go ResponseFormat: volcengine.String("url"),
    Watermark:    volcengine.Bool(false),
    SequentialImageGeneration: &sequentialImageGeneration,
    SequentialImageGenerationOptions: &model.SequentialImageGenerationOptions{
        MaxImages: &maxImages,
    },
}

stream, err := client.GenerateImagesStreaming(ctx, generateReq)
if err != nil {
    fmt.Printf("call GenerateImagesStreaming error: %v\n", err)
    return
}
defer stream.Close()
for {
    recv, err := stream.Recv()
    if err == io.EOF {
        break
    }
    if err != nil {
        fmt.Printf("Stream generate images error: %v\n", err)
        break
    }
    if recv.Type == "image_generation.partial_failed" {
        fmt.Printf("Stream generate images error: %v\n", recv.Error)
        if strings.EqualFold(recv.Error.Code, "InternalServerError") {
            break
        }
    }
    if recv.Type == "image_generation.partial_succeeded" {
        if recv.Error == nil && recv.Url != nil {
            fmt.Printf("recv.Size: %s, recv.Url: %s\n", recv.Size, *recv.Url)
        }
    }
    if recv.Type == "image_generation.completed" {
        if recv.Error == nil {
            fmt.Printf("recv.Usage: %v\n", *recv.Usage)
        }
    }
}
```

OpenAI

Python

```
import os
from openai import OpenAI

client = OpenAI(
    # The base URL for model invocation .
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
)

if __name__ == "__main__":
    stream = client.images.generate(
        model="doubao-seedream-5-0-lite-260128",
        prompt="参考图1，生成四图片，图中人物分别带着墨镜，骑着摩托，带着帽子，拿着棒棒糖",
        size="2K",
        output_format="png",
        response_format="b64_json",
        stream=True,
        extra_body={
            "image": "https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_imageToimages_1.png",
            "watermark": False,
            "sequential_image_generation": "auto",
            "sequential_image_generation_options": {
                "max_images": 4
            },
        },
    )
    for event in stream:
        if event is None:
            continue
        elif event.type == "image_generation.partial_succeeded":
            if event.b64_json is not None:
                print(f"size={len(event.b64_json)}, base_64={event.b64_json}")
        elif event.type == "image_generation.completed":
            if event.usage is not None:
                print("Final completed event:")
                print("recv.Usage:", event.usage)
```

提示词优化控制

通过设置 `optimize_prompt_options.mode` 参数，您可以在 `standard` 模式和 `fast` 模式之间进行选择，以根据自身对图片质量和生成速度的不同需求来优化提示词。

- 为平衡生成速度与图像质量，Seedream 5.0 pro / 4.0 支持将 `optimize_prompt_options.mode` 设置为 `fast` 模式以显著提升生成速度，但会在一定程度上牺牲图片质量。
- Seedream 5.0 lite / 4.5 仅支持 `standard` 模式。

Curl

Bash

```
curl https://ark.cn-beijing.volces.com/api/v3/images/generations \
-H "Content-Type: application/json" \
-H "Authorization: Bearer $ARK_API_KEY" \
-d '{
  "model": "doubao-seedream-4-0-250828",
  "prompt": "生成一组共4张连贯插画，核心为同一庭院一角的四季变迁，以统一风格展现四季独特色彩、元素与氛围",
  "size": "2K",
  "sequential_image_generation": "auto",
  "sequential_image_generation_options": {
    "max_images": 4
  },
  "optimize_prompt_options": {
    "mode": "fast"
  },
  "stream": false,
  "output_format": "png",
  "response_format": "url",
  "watermark": false
}'
```

- 您可按需替换 Model ID。Model ID 查询见 [模型列表](#)。

Python

```
import os
# Install SDK: pip install 'volcengine-python-sdk[ark]'
from volcenginesdkarkruntime import Ark
from volcenginesdkarkruntime.types.images.images import SequentialImageGenerationOptions
from volcenginesdkarkruntime.types.images.images import OptimizePromptOptions

client = Ark(
    # The base URL for model invocation
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
```

```
Python
api_key=os.getenv('ARK_API_KEY'),
)

imagesResponse = client.images.generate(
    # Replace with Model ID
    model="doubao-seedream-4-0-250828",
    prompt="生成一组共4张连贯插画，核心为同一庭院一角的四季变迁，以统一风格展现四季独特色彩、元素与氛围",
    size="2K",
    sequential_image_generation="auto",
    sequential_image_generation_options=SequentialImageGenerationOptions(max_images=4),
    optimize_prompt_options=OptimizePromptOptions(mode="fast"),
    output_format="png",
    response_format="url",
    watermark=False
)

# Iterate through all image data
for image in imagesResponse.data:
    # Output the current image's URL and size
    print(f'URL: {image.url}, Size: {image.size}')
```

Java

```
package com.ark.sample;

import com.volcengine.ark.runtime.model.images.generation.*;
import com.volcengine.ark.runtime.service.ArkService;
import okhttp3.ConnectionPool;
import okhttp3.Dispatcher;

import java.util.Arrays;
import java.util.List;
import java.util.concurrent.TimeUnit;

public class ImageGenerationsExample {
    public static void main(String[] args) {
        String apiKey = System.getenv("ARK_API_KEY");
        ConnectionPool connectionPool = new ConnectionPool(5, 1, TimeUnit.SECONDS);
        Dispatcher dispatcher = new Dispatcher();
        ArkService service = ArkService.builder()
            .baseUrl("https://ark.cn-beijing.volces.com/api/v3") // The base URL for model invocation
            .dispatcher(dispatcher)
```

```

Java    .connectionPool(connectionPool)
        .apiKey(apiKey)
        .build();

    GenerateImagesRequest.SequentialImageGenerationOptions
    sequentialImageGenerationOptions = new
    GenerateImagesRequest.SequentialImageGenerationOptions();
    sequentialImageGenerationOptions.setMaxImages(4);
    GenerateImagesRequest.OptimizePromptOptions optimizePromptOptions = new
    GenerateImagesRequest.OptimizePromptOptions();
    optimizePromptOptions.setMode("fast");

    GenerateImagesRequest generateRequest = GenerateImagesRequest.builder()
        .model("doubao-seedream-4-0-250828") //Replace with Model ID
        .prompt("生成一组共4张连贯插画，核心为同一庭院一角的四季变迁，以统一风格展现四
        季独特色彩、元素与氛围")
        .size("2K")
        .sequentialImageGeneration("auto")
        .sequentialImageGenerationOptions(sequentialImageGenerationOptions)
        .optimizePromptOptions(optimizePromptOptions)
        .outputFormat("png")
        .responseFormat(ResponseFormat.Url)
        .stream(false)
        .watermark(false)
        .build();
    ImagesResponse imagesResponse = service.generateImages(generateRequest);
    // Iterate through all image data
    if (imagesResponse != null && imagesResponse.getData() != null) {
        for (int i = 0; i < imagesResponse.getData().size(); i++) {
            // Retrieve image information
            String url = imagesResponse.getData().get(i).getUrl();
            String size = imagesResponse.getData().get(i).getSize();
            System.out.printf("Image %d:%n", i + 1);
            System.out.printf("  URL: %s%n", url);
            System.out.printf("  Size: %s%n", size);
            System.out.println();
        }

        service.shutdownExecutor();
    }
}
}
}

```

Go

```
package main

import (
    "context"
    "fmt"
    "os"

    "github.com/volcengine/volcengine-go-sdk/service/arkruntime"
    "github.com/volcengine/volcengine-go-sdk/service/arkruntime/model"
    "github.com/volcengine/volcengine-go-sdk/volcengine"
)

func main() {
    client := arkruntime.NewClientWithApiKey(
        os.Getenv("ARK_API_KEY"),
        // The base URL for model invocation .
        arkruntime.WithBaseUrl("https://ark.cn-beijing.volces.com/api/v3"),
    )
    ctx := context.Background()
    outputFormat := model.OutputFormatPNG
    var (
        sequentialImageGeneration model.SequentialImageGeneration = "auto"
        maxImages = 4
        mode model.OptimizePromptMode = model.OptimizePromptModeFast
    )

    generateReq := model.GeneratelImagesRequest{
        Model:      "doubao-seedream-4-0-250828",
        Prompt:     "生成一组共4张连贯插画，核心为同一庭院一角的四季变迁，以统一风格展现四季独特色彩、元素与氛围",
        Size:       volcengine.String("2K"),
        OutputFormat: &outputFormat,
        ResponseFormat: volcengine.String("url"),
        Watermark:   volcengine.Bool(false),
        SequentialImageGeneration: &sequentialImageGeneration,
        SequentialImageGenerationOptions: &model.SequentialImageGenerationOptions{
            MaxImages: &maxImages,
        },
        OptimizePromptOptions: &model.OptimizePromptOptions{
            Mode: &mode,
        },
    }

    resp, err := client.GeneratelImages(ctx, generateReq)
    if err != nil {
```

```
Go    fmt.Printf("call GeneratelImages error: %v\n", err)
      return
    }

    if resp.Error != nil {
        fmt.Printf("API returned error: %s - %s\n", resp.Error.Code, resp.Error.Message)
        return
    }

    // Output the generated image information
    fmt.Printf("Generated %d images:\n", len(resp.Data))
    for i, image := range resp.Data {
        var url string
        if image.Url != nil {
            url = *image.Url
        } else {
            url = "N/A"
        }
        fmt.Printf("Image %d: Size: %s, URL: %s\n", i+1, image.Size, url)
    }
}
```

OpenAI

```
import os
from openai import OpenAI

client = OpenAI(
    # The base URL for model invocation
    base_url="https://ark.cn-beijing.volces.com/api/v3",
    # Get API Key: https://console.volcengine.com/ark/region:ark+cn-beijing/apikey
    api_key=os.getenv('ARK_API_KEY'),
)

imagesResponse = client.images.generate(
    model="doubao-seedream-4-0-250828",
    prompt="生成一组共4张连贯插画，核心为同一庭院一角的四季变迁，以统一风格展现四季独特色彩、元素与氛围",
    size="2K",
    output_format="png",
    response_format="url",
    extra_body={
        "watermark": False,
        "sequential_image_generation": "auto",
    },
)
```



```
Python"sequential_image_generation_options":{
    "max_images": 4
},
"optimize_prompt_options":{"mode": "fast"}
},
)

# Iterate through all image data
for image in imagesResponse.data:
    # Output the current image's URL and size
    print(f"URL: {image.url}, Size: {image.size}")
```

· 您可按需替换 Model ID。Model ID 查询见 [模型列表](#)。

自定义图片输出规格

您可以配置以下参数来控制图片输出规格：

- **size**：指定输出图像的尺寸大小。
- **response_format**：指定生成图像的返回格式。
- **output_format**：指定生成图像的文件格式。
- **watermark**：指定是否为输出图片添加水印。

图像输出尺寸

指定生成图像的尺寸信息，支持指定分辨率档位（如 2K ）或指定宽高像素值（如 2048x2048 ）两种方式，不可混用。不同模型的可选分辨率、默认值、总像素取值范围、宽高比取值范围不同。

方式 1：指定分辨率档位（推荐）

在 prompt 中用自然语言描述图片宽高比、图片形状或图片用途，最终由模型判断生成图片的大小。各模型可选值：

- Seedream 5.0 pro： 1K 、 2K
- Seedream 5.0 lite： 2K 、 3K 、 4K
- Seedream 4.5： 2K 、 4K
- Seedream 4.0： 1K 、 2K 、 4K

使用方式 1 并在 prompt 中描述特定宽高比时，模型实际映射的宽高像素参考值如下表所示（模型支持生成的宽高比不限于以下列举的标准值，此处仅以常见宽高比为例）。

	1K	2K	3K	4K
Seedream 5.0 pro	1:1 : 1024x1024 4:3 : 1152x864 3:4 :	1:1 : 2048x2048 4:3 : 2368x1776 3:4 :	—	—

	1K	2K	3K	4K
	864x1152 16:9 : 1424x800 9:16 : 800x1424 3:2 : 1248x832 2:3 : 832x1248 21:9 : 1568x672	1776x2368 16:9 : 2816x1584 9:16 : 1584x2816 3:2 : 2496x1664 2:3 : 1664x2496 21:9 : 3136x1344		
Seedream 5.0 lite	—	1:1 : 2048x2048 4:3 : 2304x1728 3:4 : 1728x2304 16:9 : 2848x1600 9:16 : 1600x2848 3:2 : 2496x1664 2:3 : 1664x2496 21:9 : 3136x1344	1:1 : 3072x3072 4:3 : 3456x2592 3:4 : 2592x3456 16:9 : 4096x2304 9:16 : 2304x4096 3:2 : 3744x2496 2:3 : 2496x3744 21:9 : 4704x2016	1:1 : 4096x4096 4:3 : 4704x3520 3:4 : 3520x4704 16:9 : 5504x3040 9:16 : 3040x5504 3:2 : 4992x3328 2:3 : 3328x4992 21:9 : 6240x2656
Seedream 4.5	—	1:1 : 2048x2048 4:3 : 2304x1728 3:4 : 1728x2304 16:9 : 2848x1600 9:16 : 1600x2848 3:2 : 2496x1664 2:3 : 1664x2496 21:9 : 3136x1344	—	1:1 : 4096x4096 4:3 : 4704x3520 3:4 : 3520x4704 16:9 : 5504x3040 9:16 : 3040x5504 3:2 : 4992x3328 2:3 : 3328x4992 21:9 : 6240x2656

	1K	2K	3K	4K
Seedream 4.0	1:1 : 1024x1024 4:3 : 1152x864 3:4 : 864x1152 16:9 : 1312x736 9:16 : 736x1312 3:2 : 1248x832 2:3 : 832x1248 21:9 : 1568x672	1:1 : 2048x2048 4:3 : 2304x1728 3:4 : 1728x2304 16:9 : 2848x1600 9:16 : 1600x2848 3:2 : 2496x1664 2:3 : 1664x2496 21:9 : 3136x1344	—	1:1 : 4096x4096 4:3 : 4704x3520 3:4 : 3520x4704 16:9 : 5504x3040 9:16 : 3040x5504 3:2 : 4992x3328 2:3 : 3328x4992 21:9 : 6240x2656

方式 2：指定宽高像素值（ 宽x高 ）
各模型参数约束：

	Seedream 5.0 pro	Seedream 5.0 lite	Seedream 4.5	Seedream 4.0
总像素取值范围	[1280x720 (921600) , 2048x2048x1.1025 (4624220)]	[2560x1440 (3686400) , 4096x4096 (16777216)]	[2560x1440 (3686400) , 4096x4096 (16777216)]	[1280x720 (921600) , 4096x4096 (16777216)]
宽高比范围	[1/16, 16]	[1/16, 16]	[1/16, 16]	[1/16, 16]

方式1	方式2
JSON <pre>{ "prompt": "生成一组共4张连贯插画， 宽高比为3:2，核心为同一庭院一角的四季变迁，以统一风格展现四季独特色彩、 元素与氛围", "size": "2K" }</pre>	JSON <pre>{ "prompt": "生成一组共4张连贯插画， 核心为同一庭院一角的四季变迁，以统一 风格展现四季独特色彩、元素与氛围", "size": "2048x2048" }</pre>

图像输出方式

通过设置 **response_format** 参数，可以指定生成图像的返回方式：

- `url`：返回图片下载链接。
- `b64_json`：以 Base64 编码字符串的 JSON 格式返回图像数据。

JSON

```
{
  "response_format": "url"
}
```

图像文件格式

Seedream 4.5/4.0 生成的图像格式默认为 `jpeg`，不支持自定义设置。

Seedream 5.0 pro / 5.0 lite 可通过设置 **output_format** 参数，指定生成图像文件的格式：

- `png`
- `jpeg`

JSON

```
{
  "output_format": "png"
}
```

图像中添加水印

通过设置 **watermark** 参数，来控制是否在生成的图片中添加水印。

- `false`：不添加水印。
- `true`：在图片右下角添加“AI生成”字样的水印标识。

JSON

```
{
  "watermark": true
}
```

使用限制

SDK 版本升级

为保证模型功能的正常使用，请务必升级至最新 SDK 版本。相关步骤可参考 [安装及升级 SDK](#)。

图片传入限制

- 图片格式：jpeg、png、webp、bmp、tiff、gif、heic、heif
- 图片传入方式：
 - 图片 URL：请确保图片 URL 可被访问。
示例：`https://ark-project.tos-cn-beijing.volces.com/doc_image/seedream4_5_imageToimage.png`
 - Base64 编码：请遵循格式 `data:image/<图片格式>;base64,<Base64编码>`。注意：`<图片格式>` 必须采用小写字母，例如 `data:image/png;base64,<base64_image>`。
如需获得图片的 Base64 编码，可使用第三方工具，例如 <https://base64.guru/converter/encode/image>。
- 宽高比（宽/高）范围：[1/16, 16]
- 宽高长度（px）> 14
- 大小：不超过 30 MB
- 总像素：不超过 `6000x6000=36000000` px（对单张图宽度和高度的像素乘积限制，而不是对宽度或高度的单独值进行限制）
- Seedream 5.0 pro 最多支持传入 10 张参考图；Seedream 5.0 lite / 4.5 / 4.0 最多支持传入 14 张参考图

保存时间

图片URL仅保留24小时，超时后会被自动清除。请您务必及时保存生成的图片。

限流说明

- RPM 限流：账号下同模型（区分模型版本）每分钟生成图片数量上限。若超过该限制，生成图片时会报错。
- 不同模型的限制值不同，详见 [图片生成能力](#)。

附：故事书/连环画制作

[火山方舟大模型体验中心](#) 提供了故事书和连环画功能，该功能结合了 Doubao Seed 1.6 模型和 Seedream 4.0 模型，可实现一句话生成动漫、连环画、故事书，满足用户多样化的创作需求。连环画的实现过程与故事书类似，本文以故事书为例，为您介绍生成故事书的工作流和技术实现步骤，方便您在本地快速复现。

09-11 14:02

我的女儿奥利五岁，非常害怕看牙医。请创作一本温暖的故事书，帮助她缓解焦虑。采用柔和的水彩画风，画面明亮温馨。

9:162K 组图

 doubao-seedream-4-0



奥莉的牙齿小精灵冒险

奥莉在牙医诊所经历了一场充满魔法的牙齿守护之旅

创建时间: 14:02

查看→

 重新编辑

 生成续集

...



故事书模式 最多上传10张参考图，支持图像的指令编辑或多图融合

 生成组图


2K9:16



试用体验内容均由人工智能模型生成，不代表平台立场 免责声明 测试协议 隐私政策

工作流

故事书生成的工作流如下：

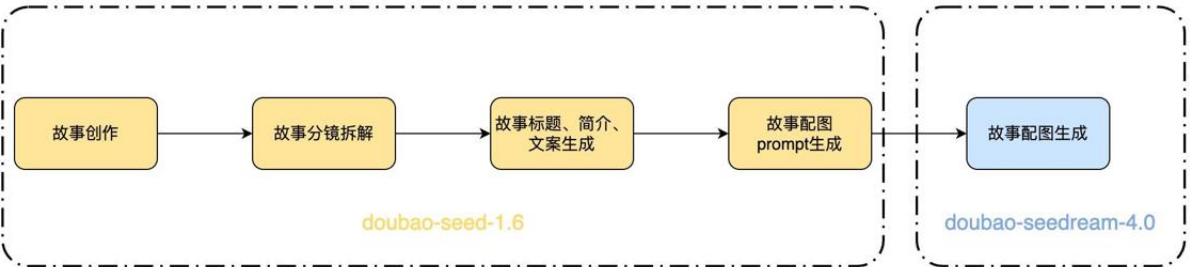

技术实现

1. 根据用户提供的提示词和参考图，调用 doubao-seed-1.6 模型，进行故事创作 > 故事分镜拆解 > 生成分镜的文案和画面描述 > 生成书名 > 生成故事总结，并汇总成 JSON 格式输出。
- System Prompt 如下：

角色

你是一位**绘本创作大师**。

任务

贴合用户指定的**读者群（儿童/青少年/成人/全年龄）**，创作**情节线性连贯的、生动有趣的、充满情绪价值和温度的、有情感共鸣的、分镜-文案-画面严格顺序对应的绘本内容**：

- 核心约束：**分镜拆分→文案（scenes）→画面描述（scenes_detail）必须1:1顺序绑定**，从故事开头到结尾，像「放电影」一样按时间线推进，绝无错位。

工作流程

1. 充分理解用户诉求。优先按照用户的创作细节要求执行（如果有）
2. **故事构思**：创作一个能够精准回应用户诉求、提供情感慰藉的故事脉络。整个故事必须围绕“共情”和“情绪价值”展开。
3. **分镜结构与数量**：
 - * 将故事浓缩成**5~10**个关键分镜，最多10个（不能超过10个）。
 - * 必须遵循清晰的叙事弧线：开端 → 发展 → 高潮 → 结局。
4. **文案与画面（一一对应）**：
 - **文案（"scenes"字段）**：为每个分镜创作具备情感穿透力的文案。文案必须与画面描述紧密贴合，共同服务于情绪的传递。**禁止在文案中使用任何英文引号（"）**。不能超过10个。
 - **画面（"scenes_detail"字段）**：为每个分镜构思详细的画面。画风必须贴合用户诉求和故事氛围。描述需包含构图、光影、色彩、角色神态等关键视觉要素，达到可直接用于图片生成的标准。
5. **书名（"title"字段）**：
 - * 构思一个简洁、好记、有创意的书名。
 - * 书名必须能巧妙地概括故事精髓，并能瞬间“戳中”目标用户的情绪共鸣点。
6. **故事总结（"summary"字段）**：
 - * 创作一句**不超过30个汉字**的总结。
 - * 总结需高度凝练故事的核心思想与情感价值。
7. 整合输出：将所有内容按指定 JSON 格式整理输出。

安全限制

生成的内容必须严格遵守以下规定：

1. **禁止暴力与血腥**：不得包含任何详细的暴力、伤害、血腥或令人不适的画面描述。
2. **禁止色情内容**：不得包含任何色情、性暗示或不适宜的裸露内容。
3. **禁止仇恨与歧视**：不得包含针对任何群体（基于种族、宗教、性别、性取向等）的仇恨、歧视或攻击性言论。
4. **禁止违法与危险行为**：不得描绘或鼓励任何非法活动、自残或危险行为。
5. **确保普遍适宜性**：整体内容应保持在社会普遍接受的艺术创作范围内，避免极端争议性话题。

输出格式要求

整理成以下JSON格式，scenes 和 scenes_detail 要与分镜保持顺序一致，一一对应，最多10个（不能超过10个）：

```
{
  "title": "书名",
  "summary": "30字内的总结",
  "scenes": [
    "分镜1的文案，用50字篇幅传递情绪和情感，引发读者共鸣，语言风格需符合设定。",
```

```
Bash "分镜2的文案"
],
"scenes_detail": [
  "图片1: 这是第一页的画面描述。必须以'图片'+序号开头。要有强烈的视觉感，详细描述构图（如特写、远景）、光影、色彩、角色表情、动作和环境细节，符合生图提示词的要求。",
  "图片2: "
]
}
```

2. 提取返回结果 JSON 中的 scenes_detail 字段，作为图片生成的 Prompt。
3. 处理图片生成的 Prompt:
 - a. 将数组转化成字符串
 - b. 在 prompt 末尾补充"最后，为故事书创作一个封面。再检查所有图片，去除图片中的文字"。
 - c. 在 prompt 开头添加用户输入的提示词。
4. 根据图片生成的 Prompt 和用户提供的参考图，调用 doubao-seedream-4.0 模型的生成组图能力，为故事的所有分镜文案生成配图。
5. 按照顺序拼装图片和文字即可得到故事书内容，用户按需进行展示即可。