


Δ cost (APPROX column) [M\$/yr] on the 303x317 pair grid (blue = improvement vs base)

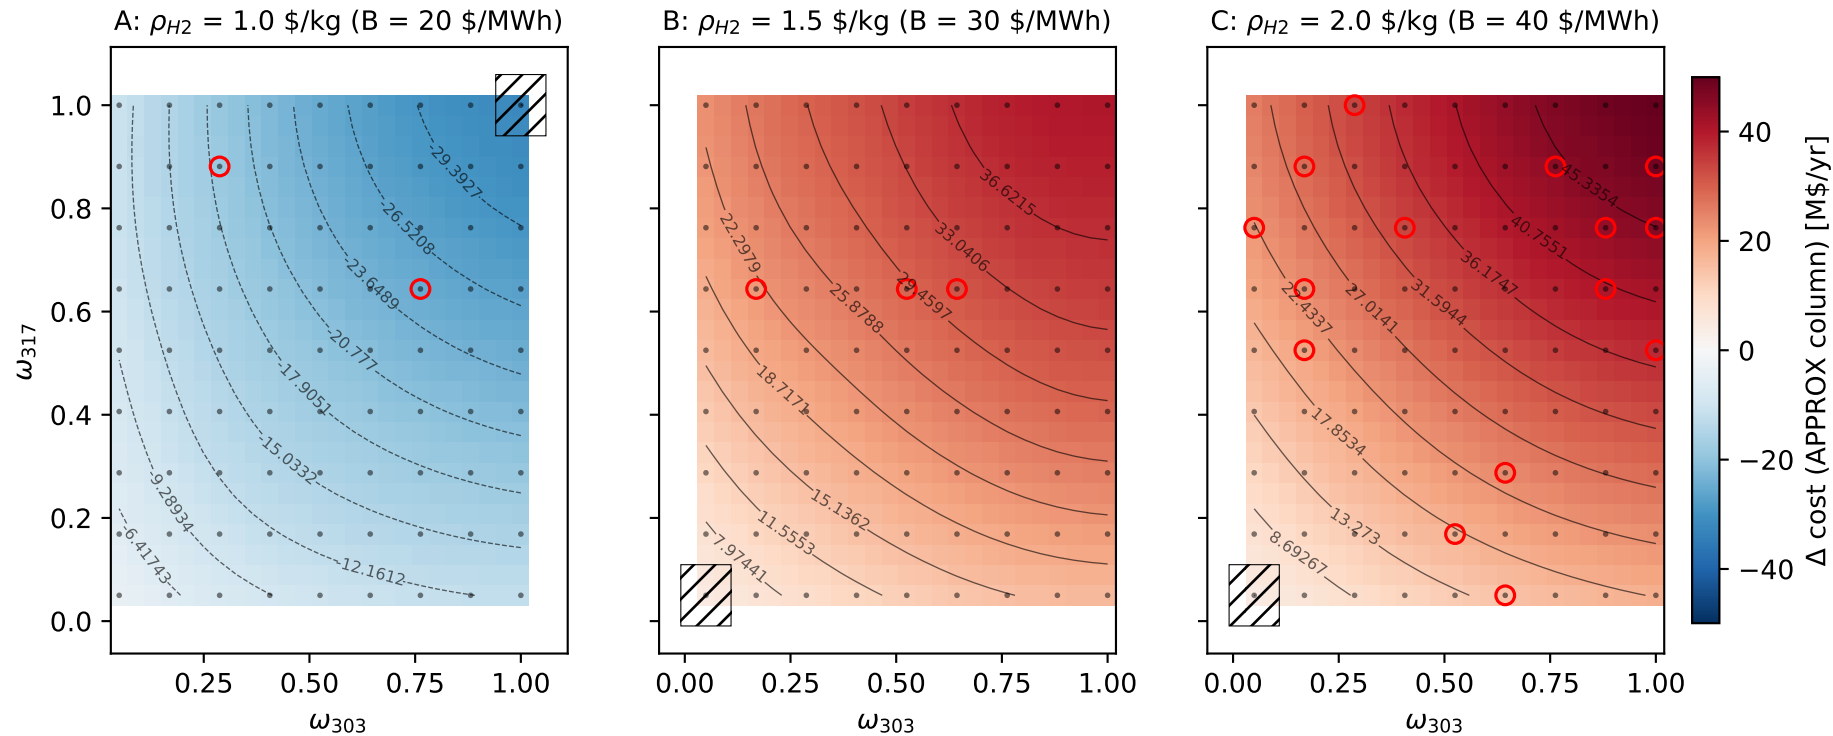

GP posterior mean (Matern-2.5 ARD, per-surface standardization, fitted white noise) on 25x25; dots = 81 direct runs; open red circles = $|\text{observed} - \text{posterior mean}| > \text{noise floor}$. hatched: near-optimal set {cells $\leq$ grid min + floor} — a tie set, not a point optimum. Contour spacing $\geq$ floor.

LOOCV (81-fold, per-fold standardization): A: $Q^2=1.00$, RMSE=0.28, flagged 2/81, near-opt tie set 1/81 cells; B: $Q^2=1.00$, RMSE=0.29, flagged 3/81, near-opt tie set 1/81 cells; C: $Q^2=1.00$, RMSE=0.44, flagged 15/81, near-opt tie set 1/81 cells