


→CSS PART-4

→Color theory

Basic Design Principles

For better looking websites

- ① Color
- ② Typography

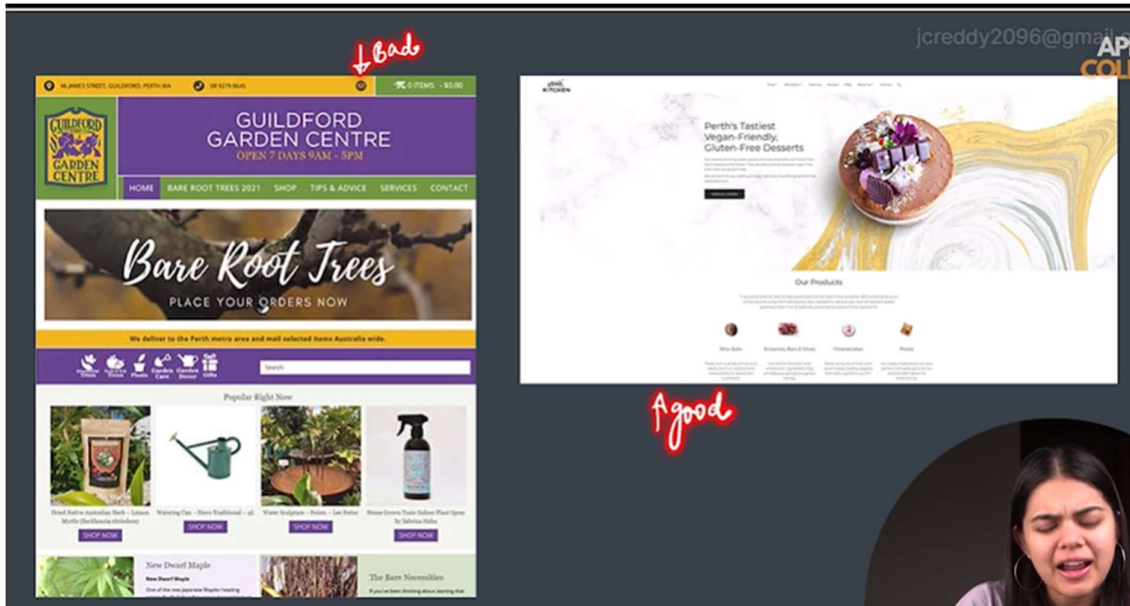

Color Theory

Color Wheel



Color Theory

Meaning of colors

TRANQUILITY AUTHORITY WISDOM STABILITY CLEANLINESS FRESHNESS FREEDOM COLD SADNESS DEPRESSION	LOVE EXCITEMENT WARMTH ROMANCE PASSION SPEED LUCK RAGE BLOOD AGGRESSION	HEALTH HAPPINESS FRIENDLINESS ENTHUSIASM ENERGETIC YOUTH FUN RUIN DANGER DESOLATION	CREATIVITY FRIENDLINESS CHEERFULNESS ENERGETIC OPTIMISM WARMTH JOY ILLNESS DANGER MADNESS	NATURE GROWTH PROSPERITY HEALTH HOPE LUCK LIFE ENVY POISON CORRUPTION
ROMANCE NURTURING INNOCENCE DELICATE PLAYFUL SWEET KIND IMMATURITY DECEPTION MATERIALISM	LUXURY MYSTERY SPIRITUALITY ATTRACTION FUTURE ROYALTY MAGIC ILLUSION DECEPTION DETACHMENT	LUXURY DARKNESS SOPHISTICATION AUTHORITY ELEGANCE MYSTERY POWER FEAR LONELINESS HOPELESSNESS	LIGHT HOLINESS CLEANLINESS SPIRITUALITY INNOCENCE PURITY HOPE COLD ISOLATION EMPTINESS	STRENGTH CALM TIMELESSNESS NEUTRALITY AUTHORITY WISDOM STABILITY DULL LIFELESS ABANDONMENT

razorpay.com

Simplify payroll with RazorpayX Payroll - Fast & Compliant [Claim 1 Month FREE](#)


Razorpay Payments Banking+ Line of Credit Payroll Resources Support Pricing [Log In](#) [Sign Up](#)

Power your finance, grow your business

Accept payments from customers. Automate payouts to vendors & employees. Never run out of working capital.

[Sign Up Now](#)


use of blue for stability & reliability

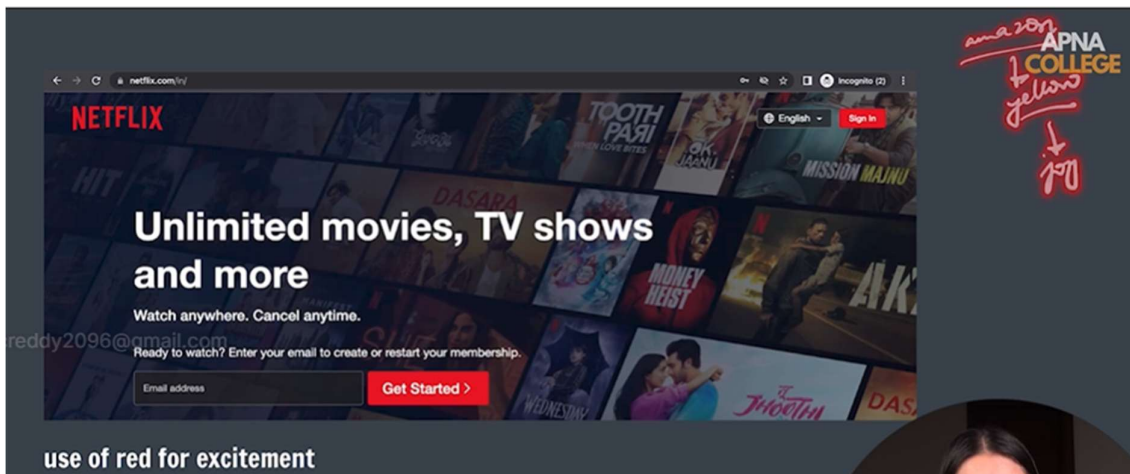


use of red for excitement

Color Theory

Subtle Color Combination - **Monochromatic**

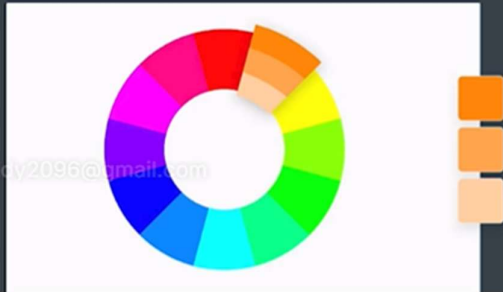



Impactful Color Combination - **Complementary**

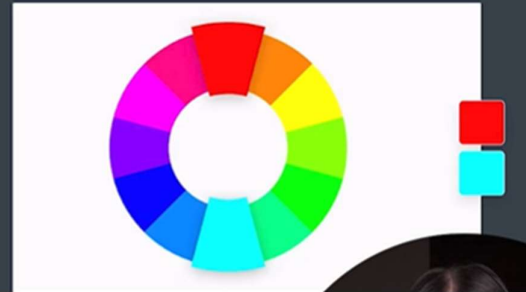

Color Theory

High Contrast Combination - **Triadic**

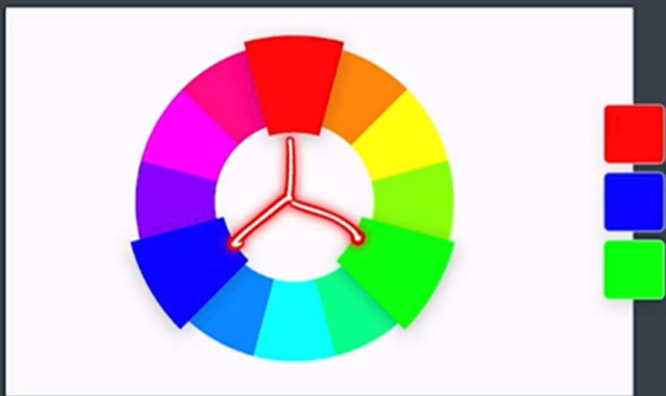

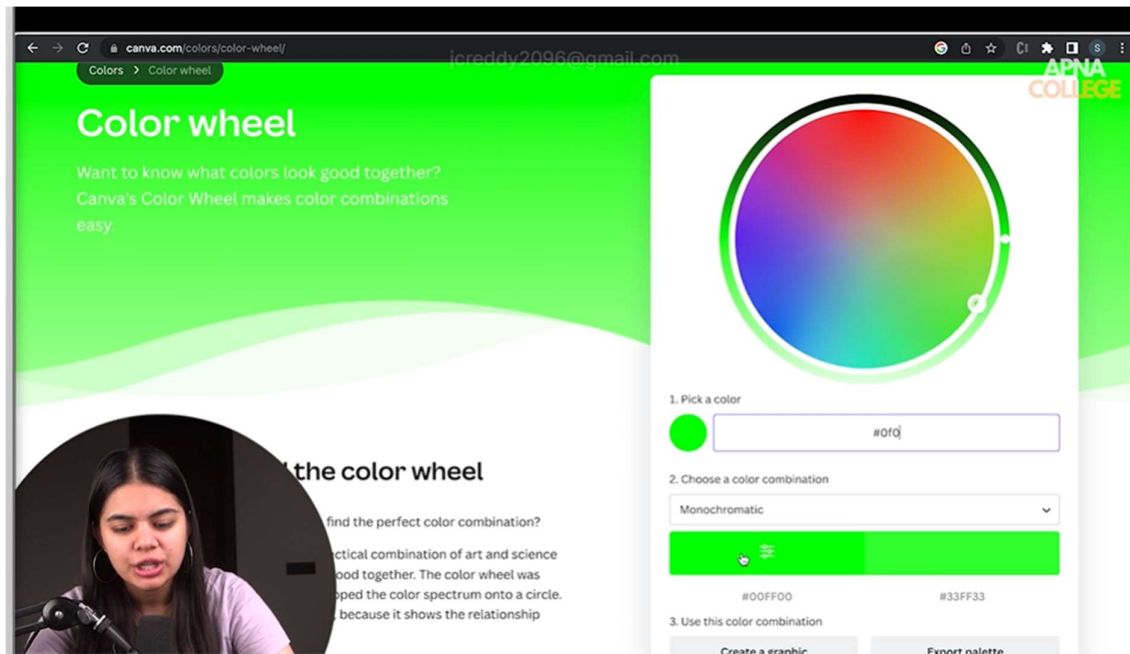

→Typography

Typography

Style & Appearance of Text

I am waiting for you!

I AM WAITING FOR YOU!

I AM WAITING FOR YOU!

Typography

Font Families

sans-serif ✓

serif

monospace

cursive

fantasy

icecream

fun
friendly ✓

↓

fantasy

museum

old
vintage

portfolio APNA COLLEGE

professional

↓

times new roman
calibri
roboto

→ each section maximum 2 fonts we use

The image shows a hand-drawn typography guide on a chalkboard background. At the top left, the word "Typography" is written in a blue, stylized font, followed by "Font Families" in orange. Below this, a list of font families is written in white: sans-serif, serif, monospace, cursive, and fantasy. To the right of the list, there are three handwritten notes: "icecream" with "fun" and "funky" below it, "museum" with "old" and "vintage" below it, and "portfolio" with "professional" below it. A bracket groups "times new roman", "calibri", and "roboto" under the "portfolio" note. In the center, a diagram shows a box divided into three sections: "header", "content", and "content". A bracket to the right of the "content" sections is labeled "max 2 fonts". In the bottom right corner, there is a small video feed of a woman speaking.

→ Google fonts

The image is a screenshot of the Google Fonts website. The header shows the Google Fonts logo and navigation links: Fonts, Icons, Knowledge, and FAQ. Below the header, there is a search bar with the text "Search fonts" and a "Sentence" dropdown menu. To the right of the search bar, there is a "Type something" input field and a "40px" size selector. Below the search bar, there are filters for "Categories", "Language", and "Number of styles". There are also checkboxes for "Show only variable fonts" and "Show only color fonts". The main content area displays a list of font families. The first three are Roboto (12 styles), Poppins (18 styles), and Wix Madefor Text (Variable (1 axis)). Each font family has a preview of the text "Whereas recognition of the inherent dignity" in its respective font.

→ before

```

x.html > html > body > h1
<!--
<meta charset="UTF-8" />
<meta http-equiv="X-UA-Compatible" content="IE=edge" />
<meta name="viewport" content="width=device-width, initial-scale=1.0" />
<title>CSS</title>
<link rel="stylesheet" href="style.css" />
<link rel="preconnect" href="https://fonts.googleapis.com" />
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin />
<link
  href="https://fonts.googleapis.com/css2?family=Roboto&display=swap"
  rel="stylesheet"
/>
</head>
<body>
<h1>Apna College</h1>
</body>
-->

```

Google Fonts

Selected family: **APNA COLLEGE**

Google Fonts > Roboto

Specimen Type tester Glyphs About & license Download family

apna college

Light 300 Italic

apna college

Regular 400

apna college

Remove Regular 400

Select Regular 400 Italic

Select Medium 500

Review

Roboto

Regular 400

Add more styles Remove all

font-family: 'Roboto', sans-serif;

File /Users/shradhahapra/WebClassroom/CSS/index.htm

Apna College

h1 739.33 x 37.33

Color #000000

Font 32px Roboto, sans-serif

Margin 21.44px 0px

ACCESSIBILITY


Contrast Aa 21

Name Apna College


Role heading

Keyboard-focusable


→ Icons



->we can use this for free in google icons

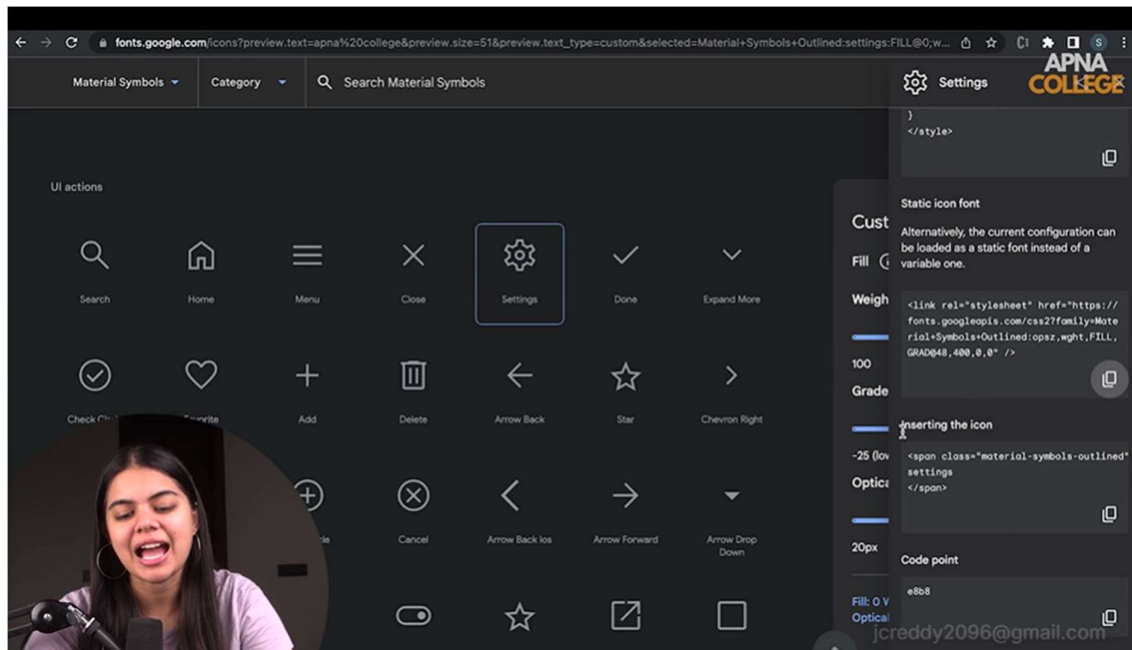


→font-awesome

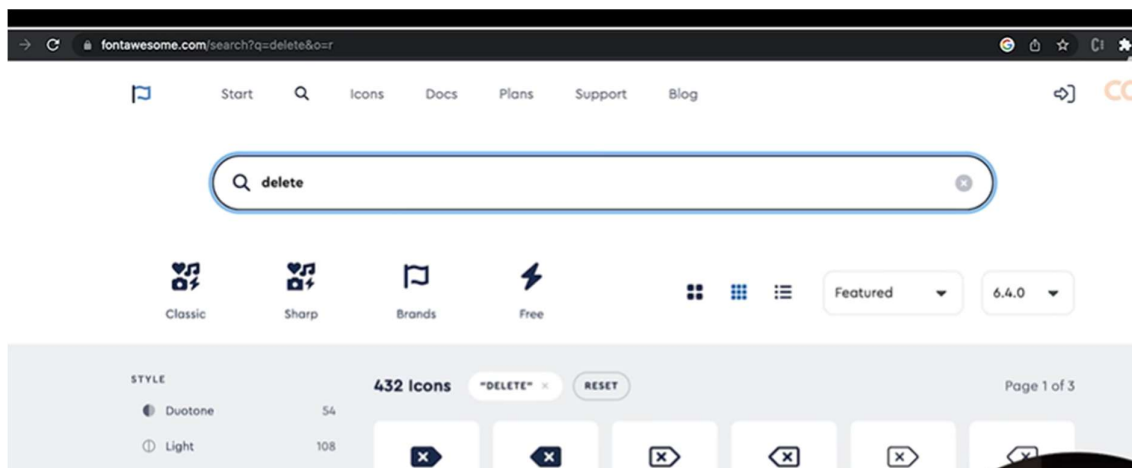

→ Bootstrap

What is Bootstrap?

"Bootstrap is a powerful, feature-packed frontend toolkit. Build anything—from prototype to production—in minutes."

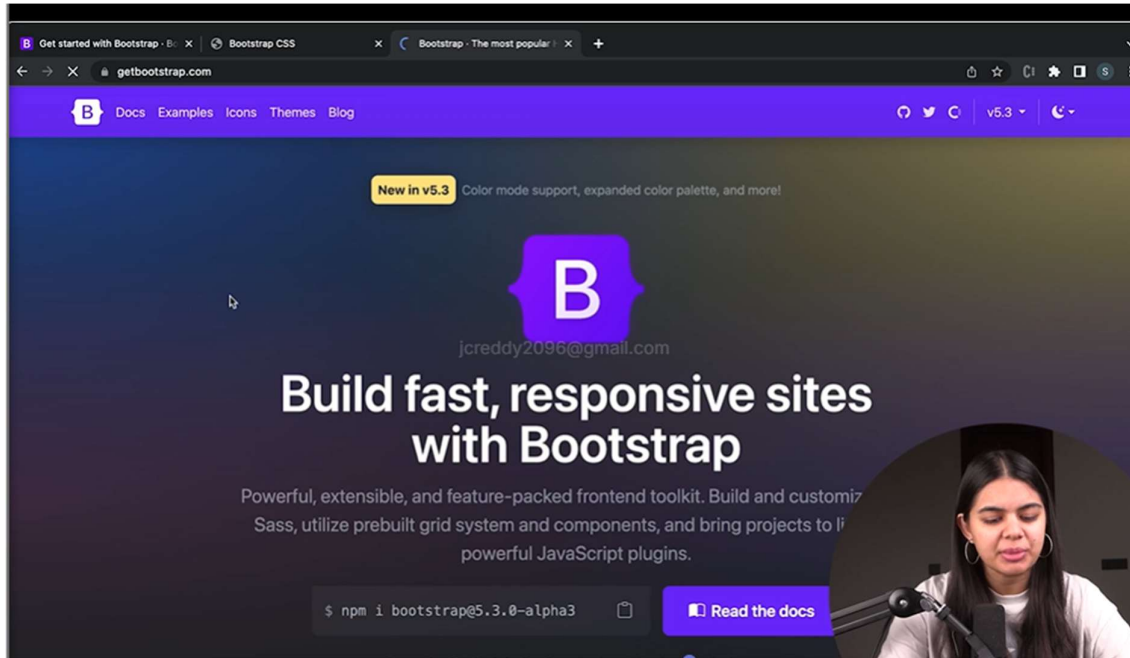

Benefits of Bootstrap

- Makes Development **Faster & Easier**
- Good choice of pre-built **components**
- good **browser Compatibility**

Using Bootstrap

cdn
↓
content delivery
network

Description	URL
CSS	<code>https://cdn.jsdelivr.net/npm/bootstrap@5.3.0-alpha3/dist/css/bootstrap.min.css</code>
JS	<code>https://cdn.jsdelivr.net/npm/bootstrap@5.3.0-alpha3/dist/js/bootstrap.bundle.min.js</code>

What will we cover?

Components

pre-built and reusable piece of user interface (UI)

eg - button, forms

Layouts

overall structure and arrangement of the elements


eg - container, grid

Container


Layout

Containers are used to contain, pad, and (sometimes) center the content within them.

→ before applying container of bootstrap

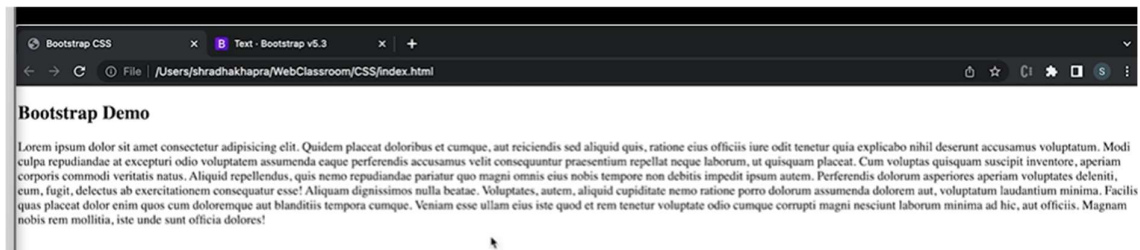

→ after

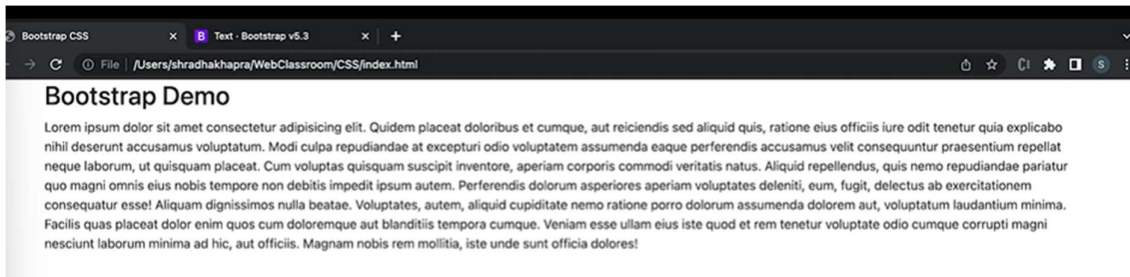

Bootstrap CSS Containers - Bootstrap v5.3

getbootstrap.com/docs/5.3/layout/containers/

Docs Examples Icons Themes Blog Search

Customize Overview Sass Options Color Color modes Components CSS variables Optimize

Layout Breakpoints Containers Grid Columns Gutters Utilities Z-index CSS Grid

Content Reboot

Bootstrap comes with three different containers:

- `.container`, which sets a `max-width` at each responsive breakpoint
- `.container-(breakpoint)`, which is `width: 100%` until the specified breakpoint
- `.container-fluid`, which is `width: 100%` at all breakpoints

The table below illustrates how each container's `max-width` compares to the original `.container` and `.container-fluid` across each breakpoint.

See them in action and compare them in our [Grid example](#).

	Extra small <576px	Small ≥576px	Medium ≥768px	Large ≥992px	X-Large ≥1200px	XX-Large ≥1400px
<code>.container</code>	100%	540px	720px	960px	1140px	1320px
<code>.container-sm</code>	100%	540px	720px	960px	1140px	1320px
<code>.container-md</code>	100%	100%	720px	960px	1140px	1320px
<code>.container-lg</code>	100%	100%	100%	960px	1140px	1320px
<code>.container-xl</code>	100%	100%	100%	100%	1140px	1320px
<code>.container-xxl</code>	100%	100%	100%	100%	100%	100%
<code>.container-fluid</code>	100%	100%	100%	100%	100%	100%

On this page

- How they work
- Default container
- Responsive containers
- Fluid containers
- Sass

jcreddy2096@gmail.com

→ buttons

Components

class = "btn"

- Buttons

Primary Secondary Success Danger Warning Info Light Dark Link

Variants

Bootstrap includes several button variants, each serving its own semantic purpose, with a few extras thrown in for more control.

Primary Secondary Success Danger Warning Info Light Dark Link

HTML

```
<button type="button" class="btn btn-primary">Primary</button>
<button type="button" class="btn btn-secondary">Secondary</button>
<button type="button" class="btn btn-success">Success</button>
<button type="button" class="btn btn-danger">Danger</button>
<button type="button" class="btn btn-warning">Warning</button>
<button type="button" class="btn btn-info">Info</button>
<button type="button" class="btn btn-light">Light</button>
<button type="button" class="btn btn-dark">Dark</button>

<button type="button" class="btn btn-link">Link</button>
```

Outline buttons

In need of a button, but not the hefty background colors they bring? Replace the default modifier class with the `.btn-outline-*` ones to remove all background images and colors on any button.



HTML

```
<button type="button" class="btn btn-outline-primary">Primary</button>
<button type="button" class="btn btn-outline-secondary">Secondary</button>
<button type="button" class="btn btn-outline-success">Success</button>
<button type="button" class="btn btn-outline-danger">Danger</button>
<button type="button" class="btn btn-outline-warning">Warning</button>
<button type="button" class="btn btn-outline-info">Info</button>
<button type="button" class="btn btn-outline-light">Light</button>
<button type="button" class="btn btn-outline-dark">Dark</button>
```

Sizes

Fancy larger or smaller buttons? Add `.btn-lg` or `.btn-sm` for additional sizes.

Large button Large button

HTML

```
<button type="button" class="btn btn-primary btn-lg">Large button</button>
<button type="button" class="btn btn-secondary btn-lg">Large button</button>
```

Small button Small button

HTML

```
<button type="button" class="btn btn-primary btn-sm">Small button</button>
<button type="button" class="btn btn-secondary btn-sm">Small button</button>
```

Disabled state

Make buttons look inactive by adding the `disabled` boolean attribute to any `<button>` element. Disabled buttons have `pointer-events: none` applied to, preventing hover and active states from triggering.

Primary button Button Primary button Button

HTML

```
<button type="button" class="btn btn-primary" disabled>Primary button</button>
<button type="button" class="btn btn-secondary" disabled>Button</button>
<button type="button" class="btn btn-outline-primary" disabled>Primary button</button>
<button type="button" class="btn btn-outline-secondary" disabled>Button</button>
```




Disabled buttons using the `<a>` element behave a bit different:

- `<a>`s don't support the `disabled` attribute, so you must add the `.disabled` class to make it visually disabled.
- Some future-friendly styles are included to disable all `pointer-events` on anchor buttons.
- Disabled buttons using `<a>` should include the `aria-disabled="true"` attribute to indicate the element to assistive technologies.
- Disabled buttons using `<a>` should not include the `href` attribute.

→ anchor tag converted to button in bootstrap




→ Badges

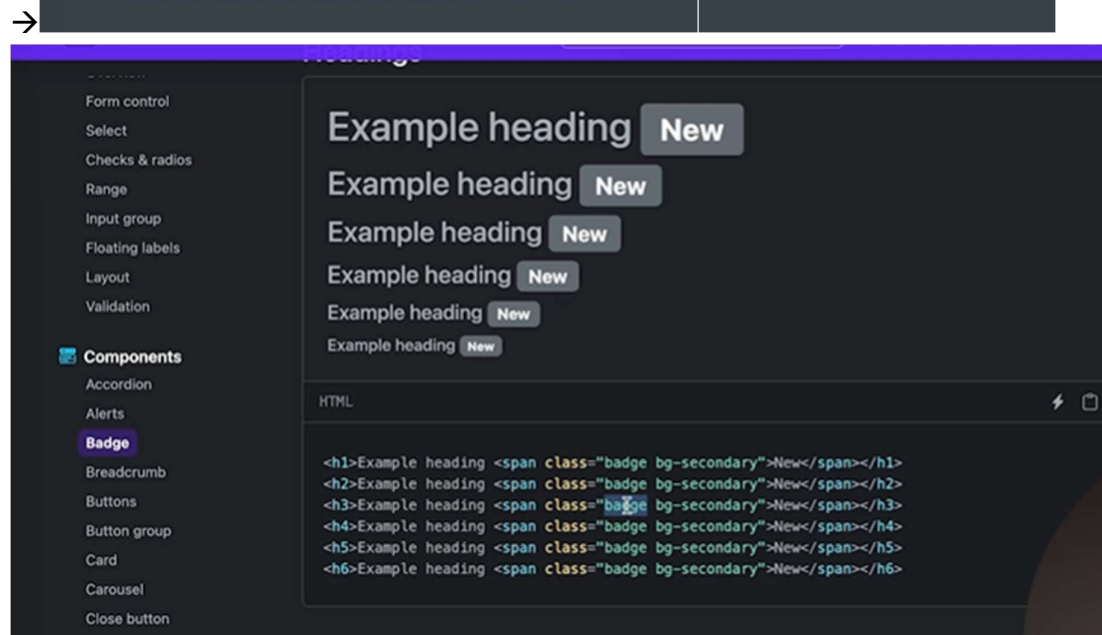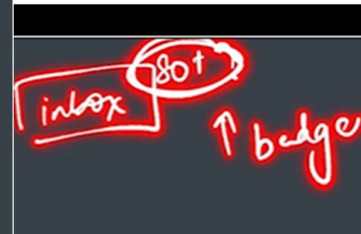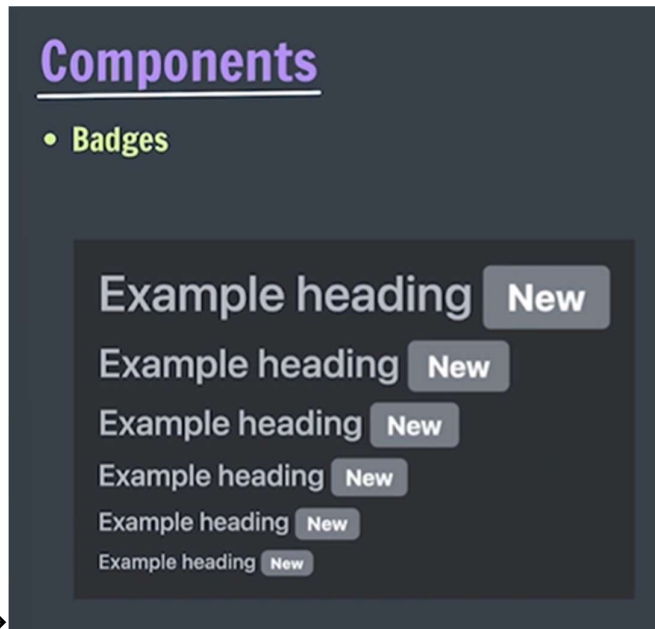

→ in buttons also we can implement badge

Buttons

Badges can be used as part of links or buttons to provide a counter.



```
HTML
```

```
<button type="button" class="btn btn-primary">
  Notifications <span class="badge text-bg-secondary">4</span>
</button>
```

Note that depending on how they are used, badges may be confusing for users of screen readers a



```
<br />
<button class="btn btn-primary">
  Followers
  <span class="badge bg-dark">100+</span>
</button>
</div>
```

Positioned

Use utilities to modify a `.badge` and position it in the corner of a link or button.



```
HTML
```

```
<button type="button" class="btn btn-primary position-relative">
  Inbox
  <span class="position-absolute top-0 start-100 translate-middle badge rounded-pill bg
    99+
    <span class="visually-hidden">unread messages</span>
  </span>
</button>
```

You can also replace the `.badge` class with a few more utilities without a count for a more generic in

→ Alert

Components

- Alert



A simple success alert—check it out!

```
</button>
<br />
<div class="alert alert-danger">Download Failed! Please t
</div>
```

Followers 100%

Download Failed! Please try again.

```
<div class="alert alert-success">
  Congratulations! Your score is 50/50
</div>
</div>
```

Congratulations! Your score is 50/50

Live example

Click the button below to show an alert (hidden with inline styles to start), then dismiss (and destroy) it with the built-in close button.

Show live alert

HTML

```
<div id="liveAlertPlaceholder"></div>
<button type="button" class="btn btn-primary" id="liveAlertBtn">Show live alert</button>
```

We use the following JavaScript to trigger our live alert demo:

```
const alertPlaceholder = document.getElementById('liveAlertPlaceholder')
const appendAlert = (message, type) => {
  const wrapper = document.createElement('div')
  wrapper.innerHTML = [
```

Live example

Click the button below to show an alert (hidden with inline styles to start), then dismiss (and destroy) it with the built-in close button.

Nice, you triggered this alert message!

×

Show live alert

HTML

Icons

Similarly, you can use [flexbox utilities](#) and [Bootstrap icons](#) to create alerts with icons. Depending on your icon and content, you may want to add more utilities or custom styles.



HTML

```
<div class="alert alert-primary d-flex align-items-center" role="alert">
  <svg xmlns="http://www.w3.org/2000/svg" class="bi bi-exclamation-triangle-fill f
  <path d="M8.982 1.566a1.13 1.13 0 0 0-1.96 0L1.165 13.233c-.457.778.091 1.767.9
  </svg>
```

→ Button group

Components

- Button Group



Bootstrap Demo



Basic example

Wrap a series of buttons with `.btn` in `.btn-group`.



HTML

```
<div class="btn-group" role="group" aria-label="Basic example">
  <button type="button" class="btn btn-primary">Left</button>
  <button type="button" class="btn btn-primary">Middle</button>
  <button type="button" class="btn btn-primary">Right</button>
</div>
```

→ Nav bar

Bootstrap CSS x B Navbar - Bootstrap v5.3 x +

getbootstrap.com/docs/5.3/components/navbar/

Docs Examples Icons Themes Blog

Search

Alerts
Badge
Breadcrumb
Buttons
Button group
Card
Carousel
Close button
Collapse
Dropdowns
List group
Modal
Navbar
Navs & tabs
Offcanvas
Pagination
Placeholder
Popovers
Progress
Scrollspy
Spinners

Navbar

View on GitHub

Documentation and examples for Bootstrap's powerful, responsive navigation header, the navbar. Includes support for branding, navigation, and more, including support for our collapse plugin.





Adobe Creative Cloud for Teams. Put creativity to work.
ads via Carbon


How it works

Here's what you need to know before getting started with the navbar:


- Navbars require a wrapping `.navbar` with `.navbar-expand{<sm>|<md>|<lg>|<xl>|<xxl>}` for responsive collapsing and [color scheme](#) classes.
- Navbars and their contents are fluid by default. Change the `container` to limit their horizontal width.
- Use our [spacing](#) and [flex](#) utility classes for controlling spacing and alignment within navbars.

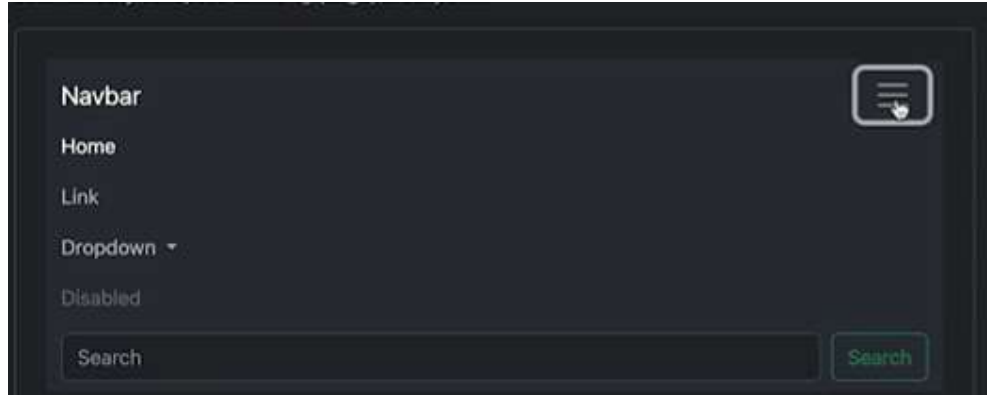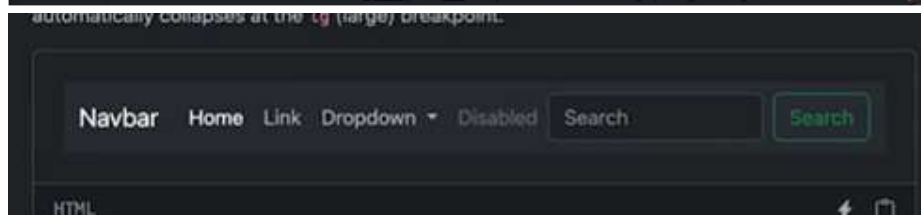

→Cards

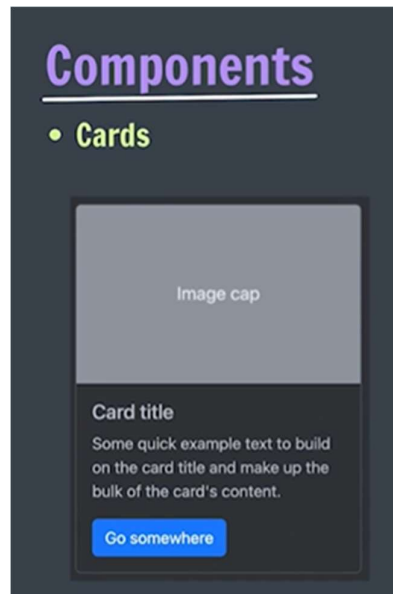


→Grid layout

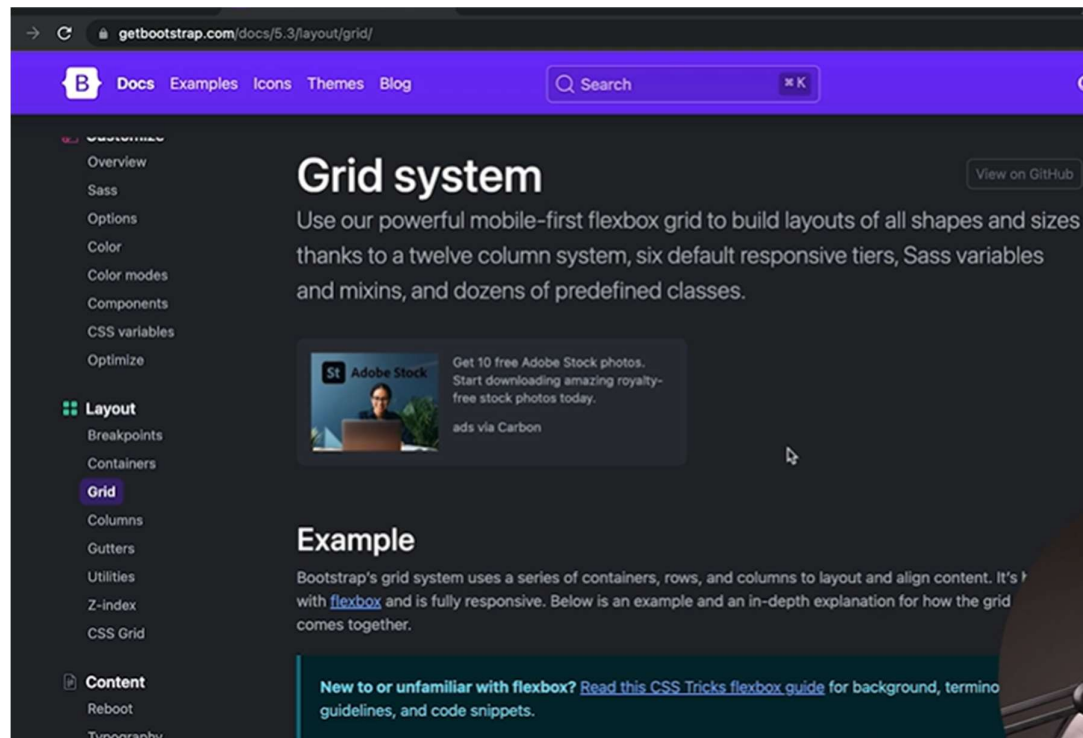

Layout

- Grid


12 column system



Layout

- Grid (Column)

Vertical Alignment

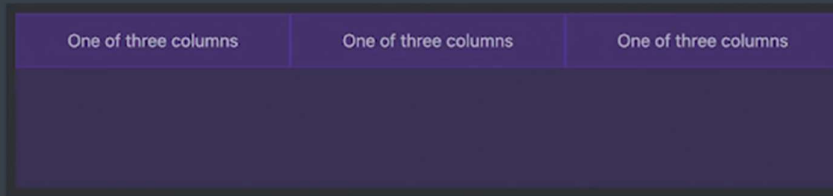

→Forms

Forms

- Form Controls
- Select
- Checkbox & Radio
- Layout

Default

Custom `<select>` menus need only a custom class, `.form-select` to trigger the custom styles. Custom styles are limited to the `<select>`'s initial appearance and cannot modify the `<option>`s due to browser limitations.

A screenshot of a web browser showing a select menu. The menu is open, displaying three options: "One", "Two", and "Three". The first option, "One", is highlighted in blue. The menu has a dark background and a light border.

```
<select class="form-select" aria-label="Default select example">
  <option selected>Open this select menu</option>
  <option value="1">One</option>
  <option value="2">Two</option>
  <option value="3">Three</option>
</select>
```

Checks

- ☐ Default checkbox
- ☒ Checked checkbox

HTML

```
<div class="form-check">
  <input class="form-check-input" type="checkbox" value="" id="flexCheckDefault">
  <label class="form-check-label" for="flexCheckDefault">
    Default checkbox
  </label>
</div>
<div class="form-check">
  <input class="form-check-input" type="checkbox" value="" id="flexCheckChecked" checked="">
  <label class="form-check-label" for="flexCheckChecked">
    Checked checkbox
  </label>
</div>
```

Radios

- ☐ Default radio
- ☒ Default checked radio

HTML

```
<div class="form-check">
  <input class="form-check-input" type="radio" name="flexRadioDefault" id="flexRadioDef1">
  <label class="form-check-label" for="flexRadioDefault1">
    Default radio
  </label>
</div>
<div class="form-check">
  <input class="form-check-input" type="radio" name="flexRadioDefault" id="flexRadioDef2" checked="">
  <label class="form-check-label" for="flexRadioDefault2">
    Default checked radio
  </label>
</div>
```

Switches

A switch has the markup of a custom checkbox but uses the `.form-switch` class to render a toggle switch. Consider using `role="switch"` to more accurately convey the nature of the control to assistive technologies that support this role. In older assistive technologies, it will simply be announced as a regular checkbox as a fallback. Switches also support the `disabled` attribute.

- ☐ Default switch checkbox input
- ☒ Checked switch checkbox input
- ☐ Disabled switch checkbox input
- ☒ Disabled checked switch checkbox input