
Invisible characters (aka control characters)
Wiki: https://en.wikipedia.org/wiki/ASCII#Control_code_chart

By default, invisible characters are displayed using **caret notation**.
Wiki: https://en.wikipedia.org/wiki/Caret_notation
e.g.
^M = 13 = x0d (hex) = Carriage return
^[= 27 = x1b (hex) = Escape key


[usage] get info for character under cursor
Use the **:ascii** command
Mapping = **ga**
Also works for **unicode**.

```
" Help
:help :ascii
:help ga        " :ascii map

" e.g. see info for carriage return
" ^M = 13 (digital) = 0d (hex) = 015 (Octal)
:ascii
ga              " same
i               " insert
<c-v>013        " digital
<c-v>x0d        " hex
<c-v>o015       " oct
```

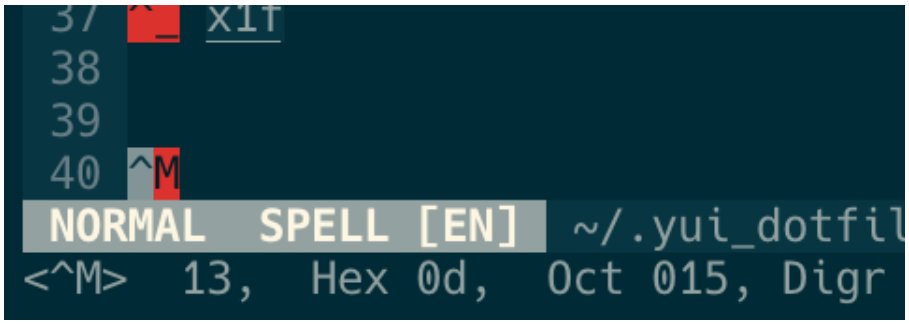



```
" e.g. unicode あ
"  あ= 12354 (digital) = 3042 (hex)
ga
i               " insert
<c-v>u3042      " unicode
```

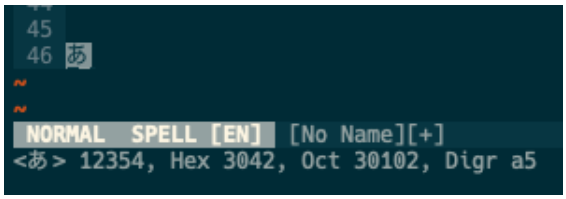


[usage] change how control characters are displayed
By default, invisible characters are displayed using **caret notation**.
Display format can be changed with **display** option.
Can be displayed in **hex**.

```
" Help
:help "display"

" e.g. display in caret notation (default)
:set display-=uhex
```

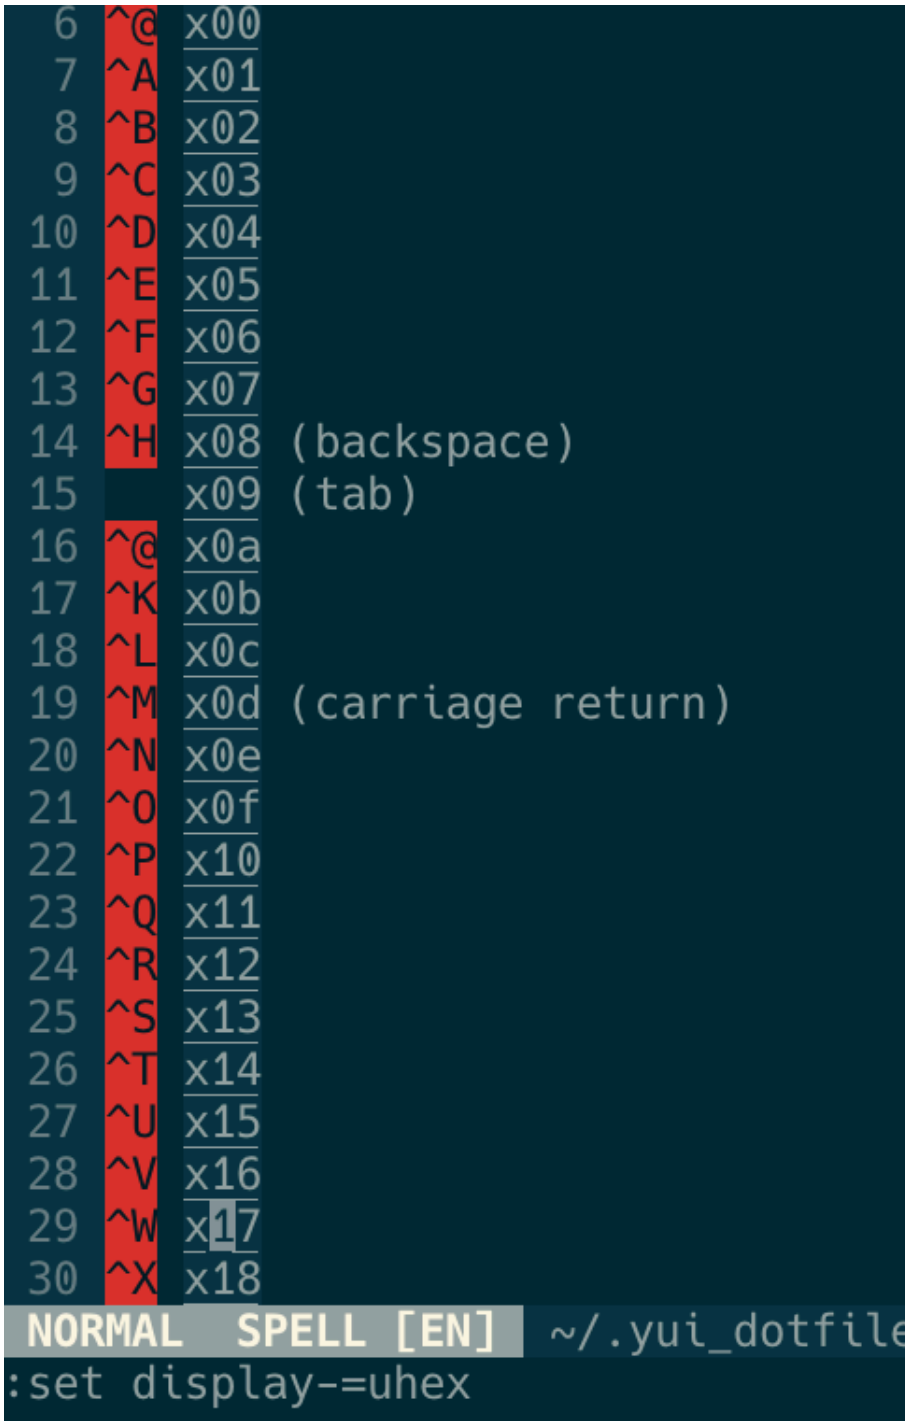


```
" e.g. display in hex
:set display+=uhex
```

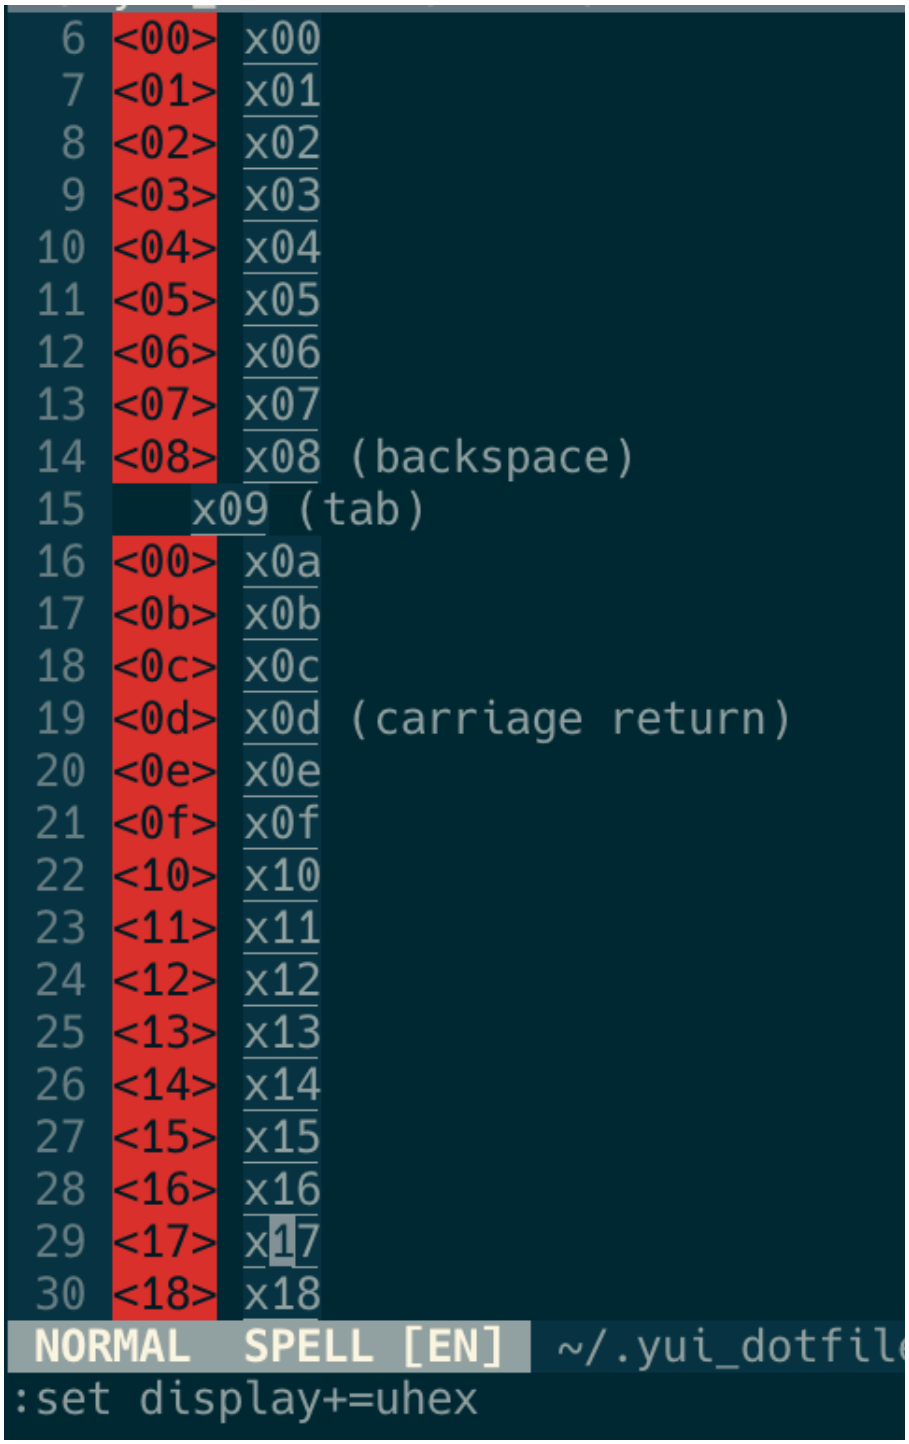

[usage] insert control character
Use **<c-v>** command to insert character.
Can be inserted with any format of code: **digital, octal, hex**

```
:help i_ctrl-v_digit
:help i_ctrl-v

" e.g. insert carriage return
" ^M = 13 (digital) = 015 (octal) = 0d (hex)
<c-v>013        " digital code
<c-v>o015       " octal code
<c-v>x0d        " hex code
<c-v>u000d      " unicode
```




```
" Can be used in commandline too
" e.g. search
/<c-v>013
```

