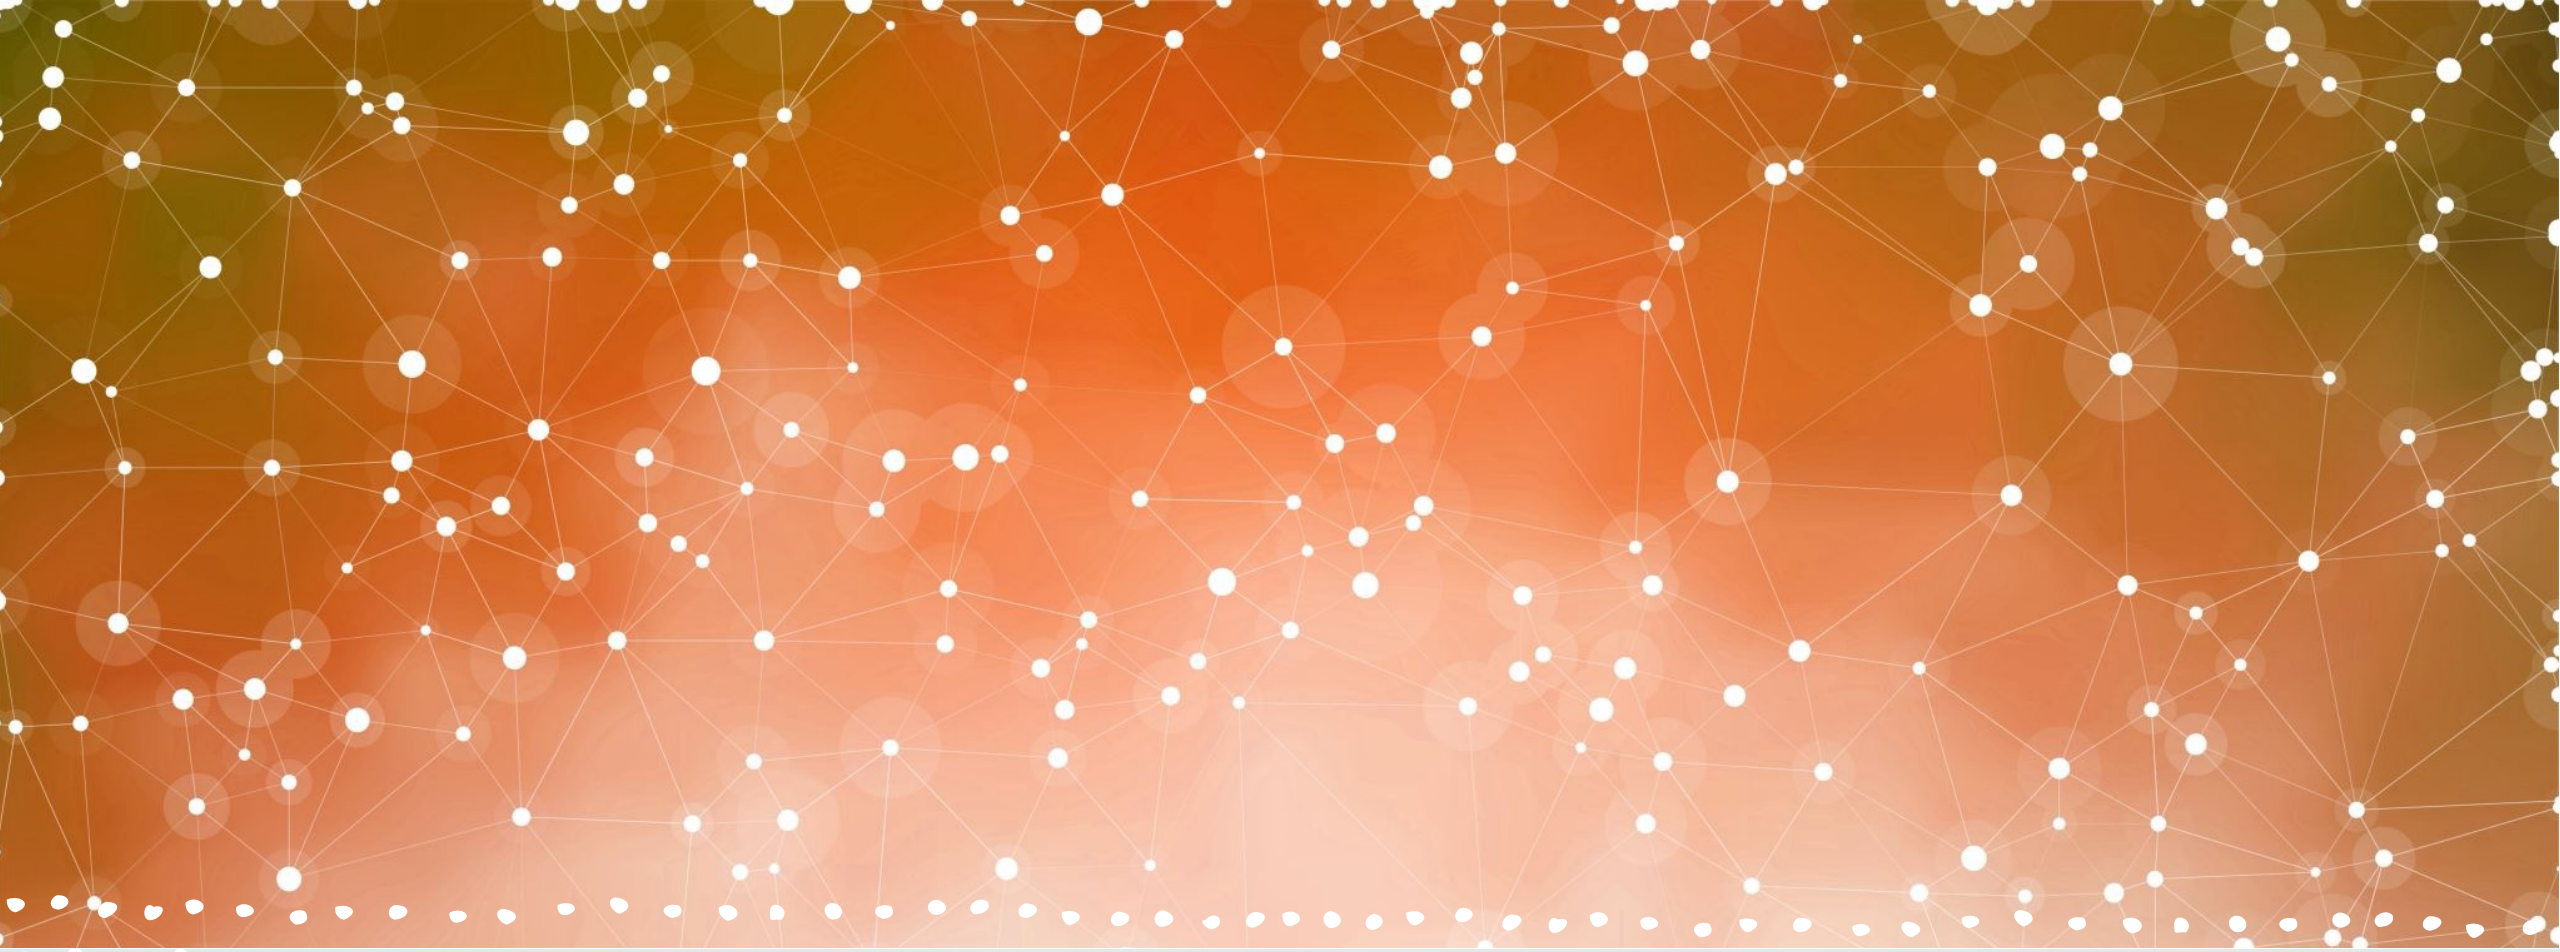

Deep learning In Action

SUN YANAN

MNIST

The **MNIST database** (*Modified National Institute of Standards and Technology database*[1]) is a large database of handwritten digits that is commonly used for training various image processing systems.

60000 * 28 * 28

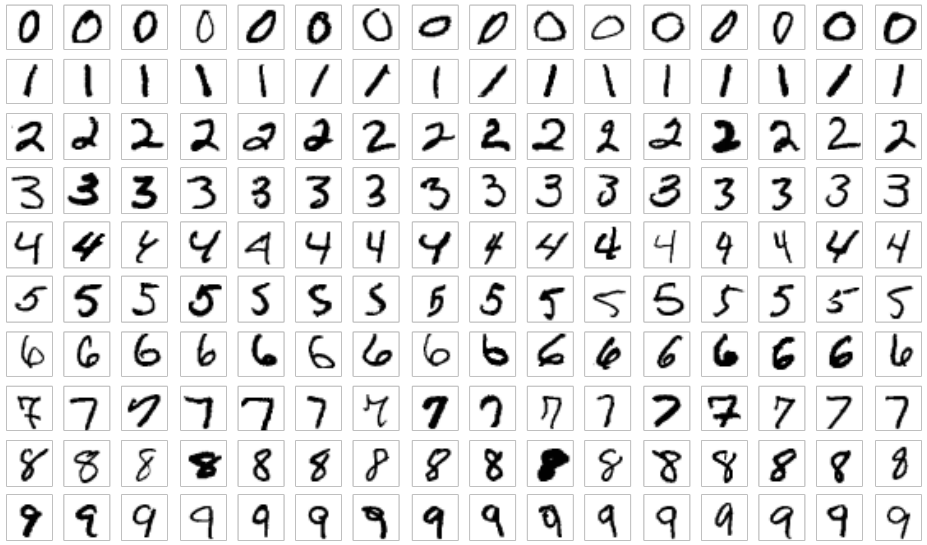

CNN – Convolution

Convolution (3 * 3) kernal

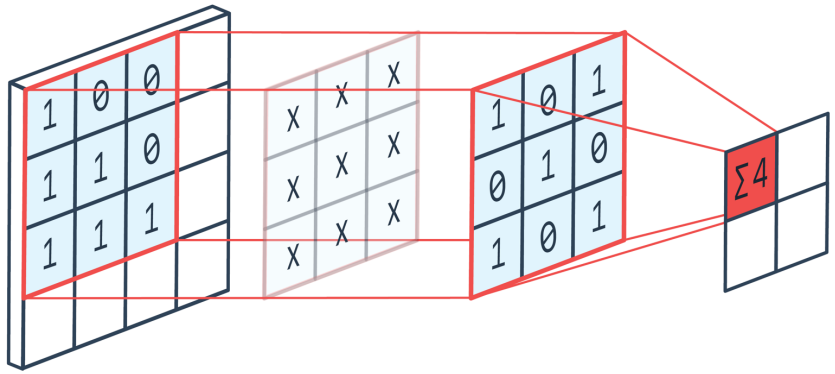

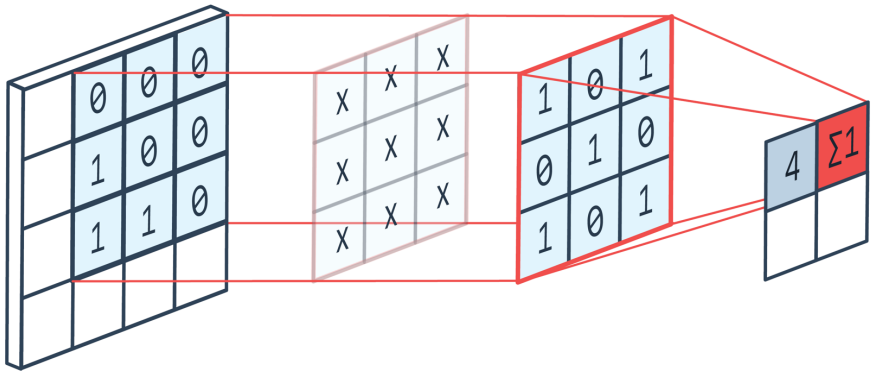

CNN - Convolution

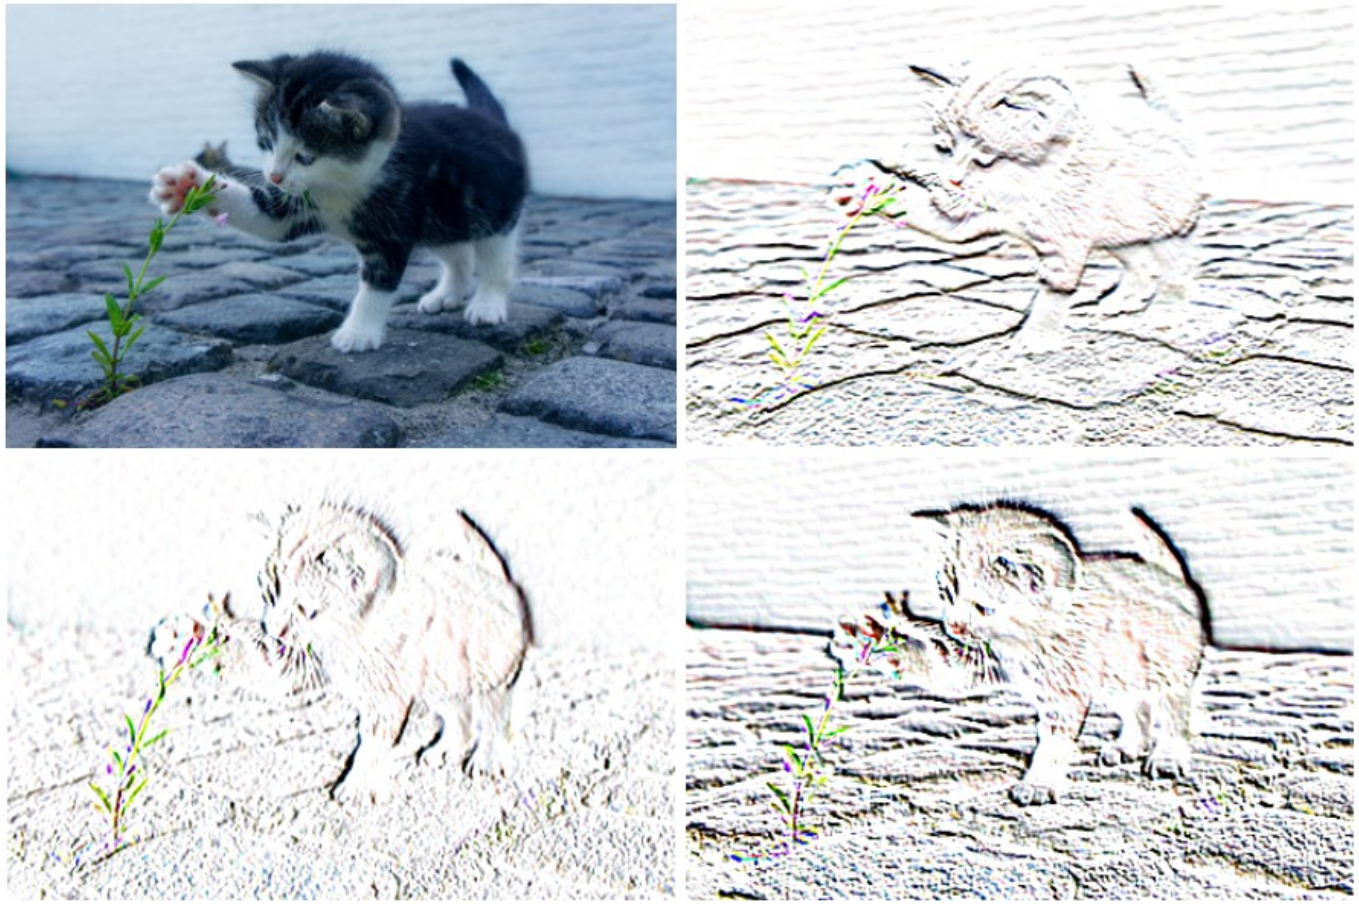

CNN – Max Pooling

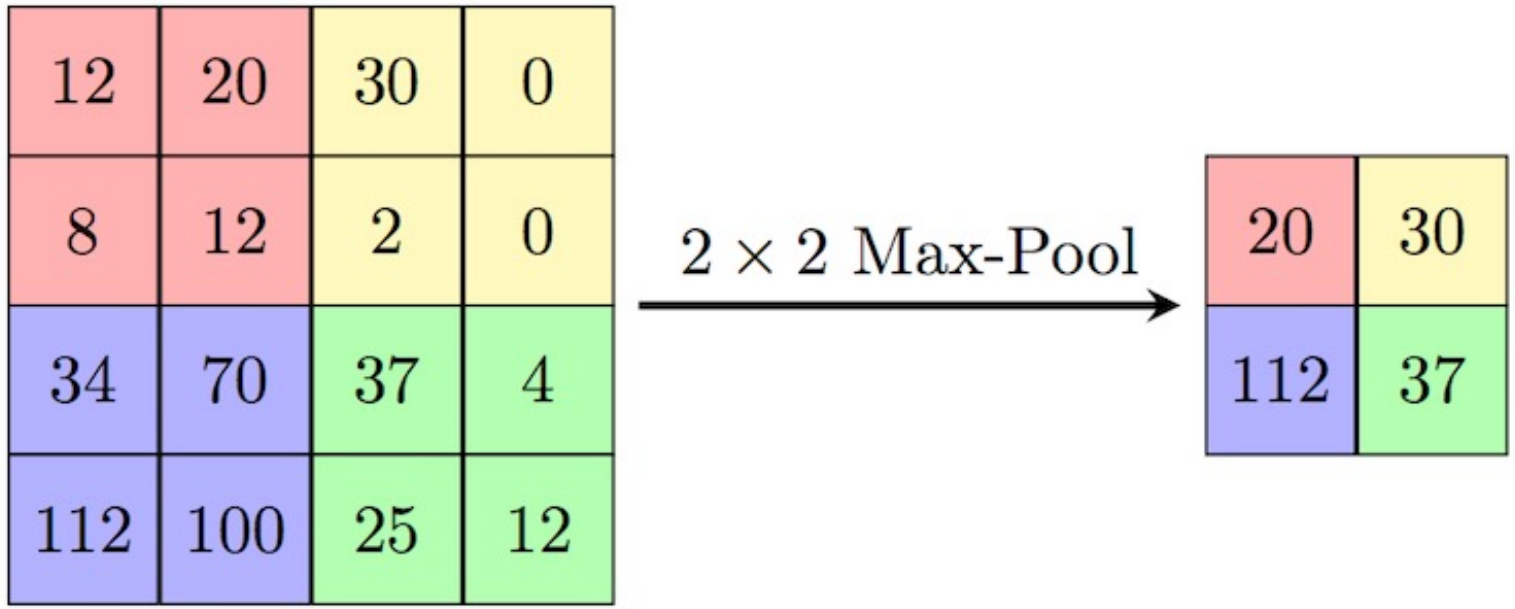

CNN

输入图片

卷积层

最大池化层

CNN

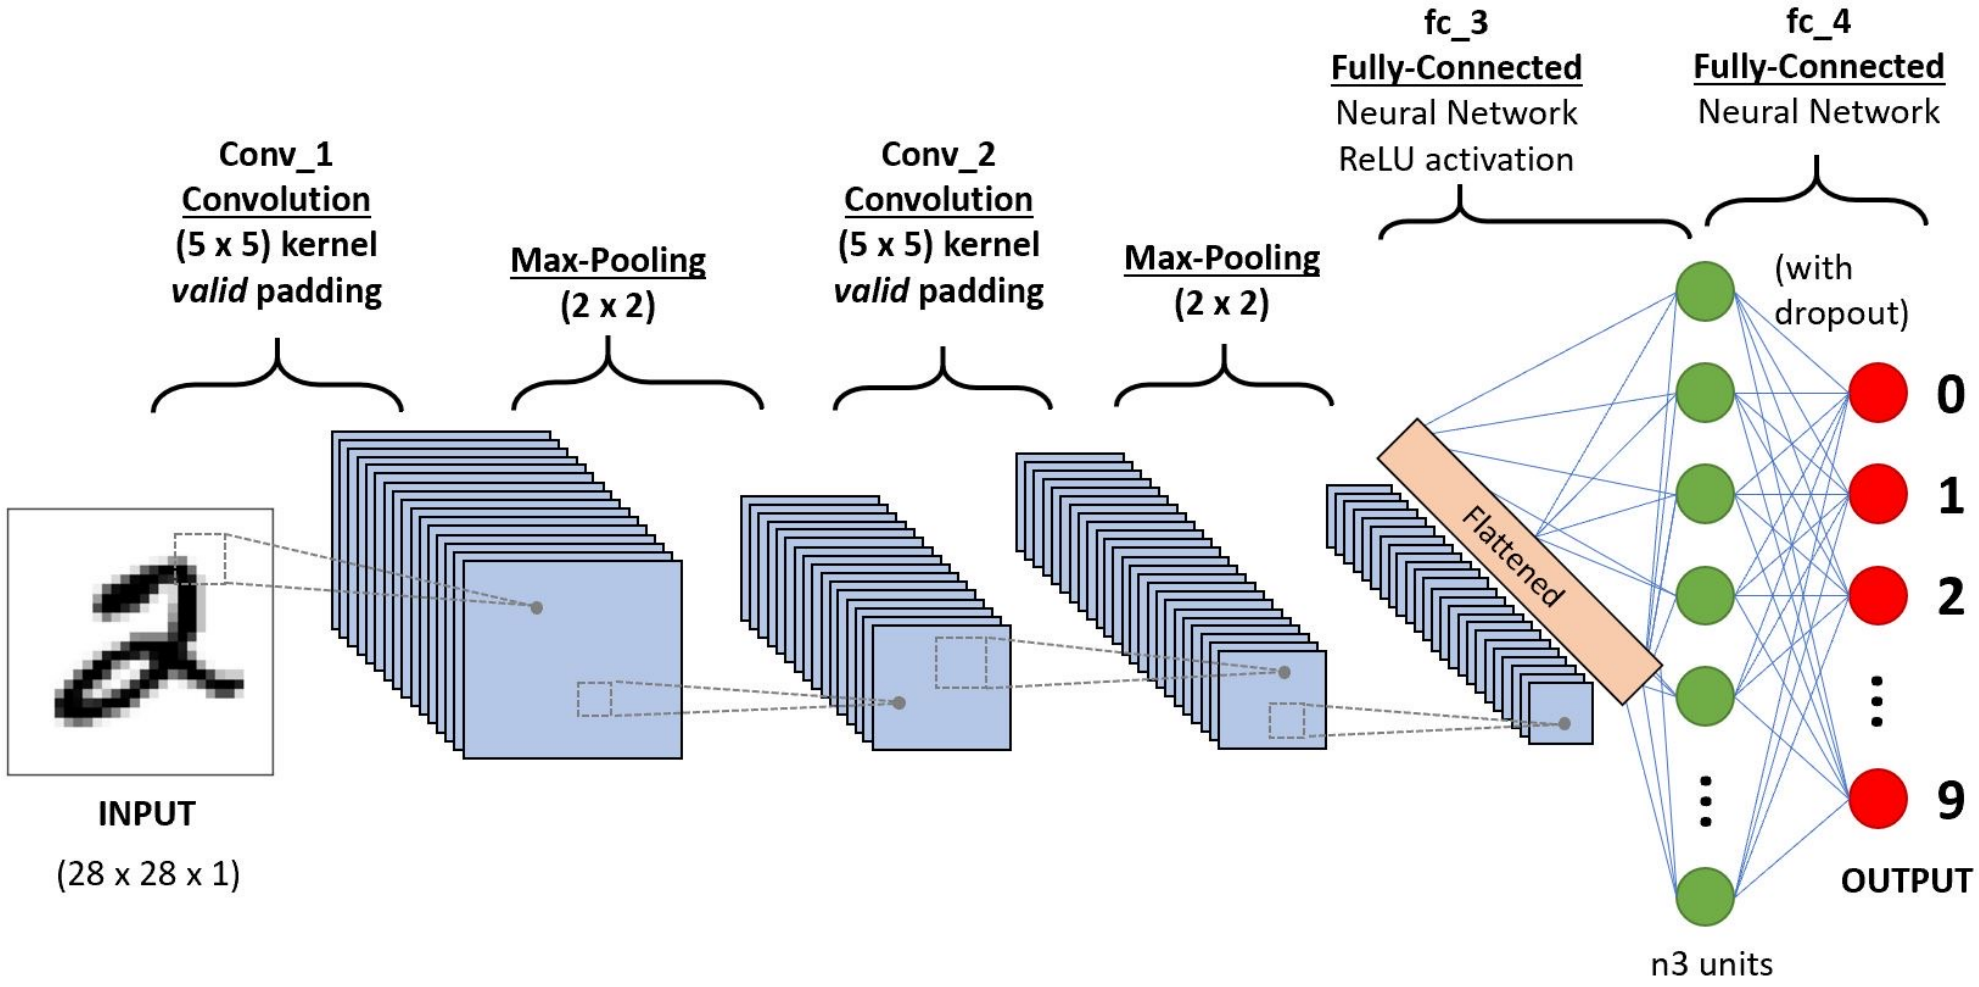
Conv_1
Convolution
(5 x 5) kernel
valid padding
Max-Pooling
(2 x 2)
Conv_2
Convolution
(5 x 5) kernel
valid padding
Max-Pooling
(2 x 2)
fc_3
Fully-Connected
Neural Network
ReLU activation
fc_4
Fully-Connected
Neural Network
(with
dropout)
Flattened
0
1
2
9
INPUT
(28 x 28 x 1)
OUTPUT
n3 units

TensorFlow

First Simple Model

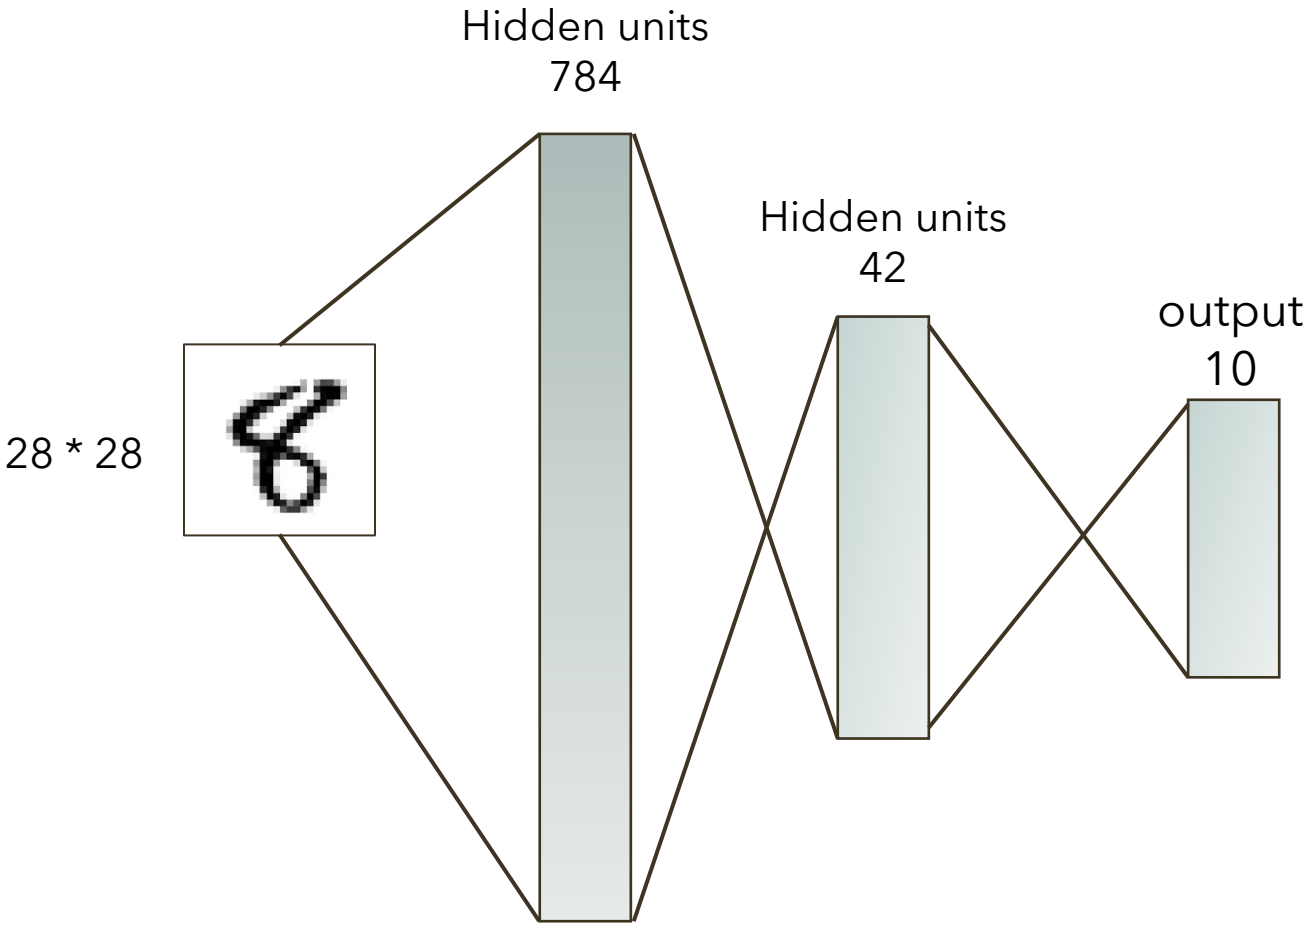

CNN

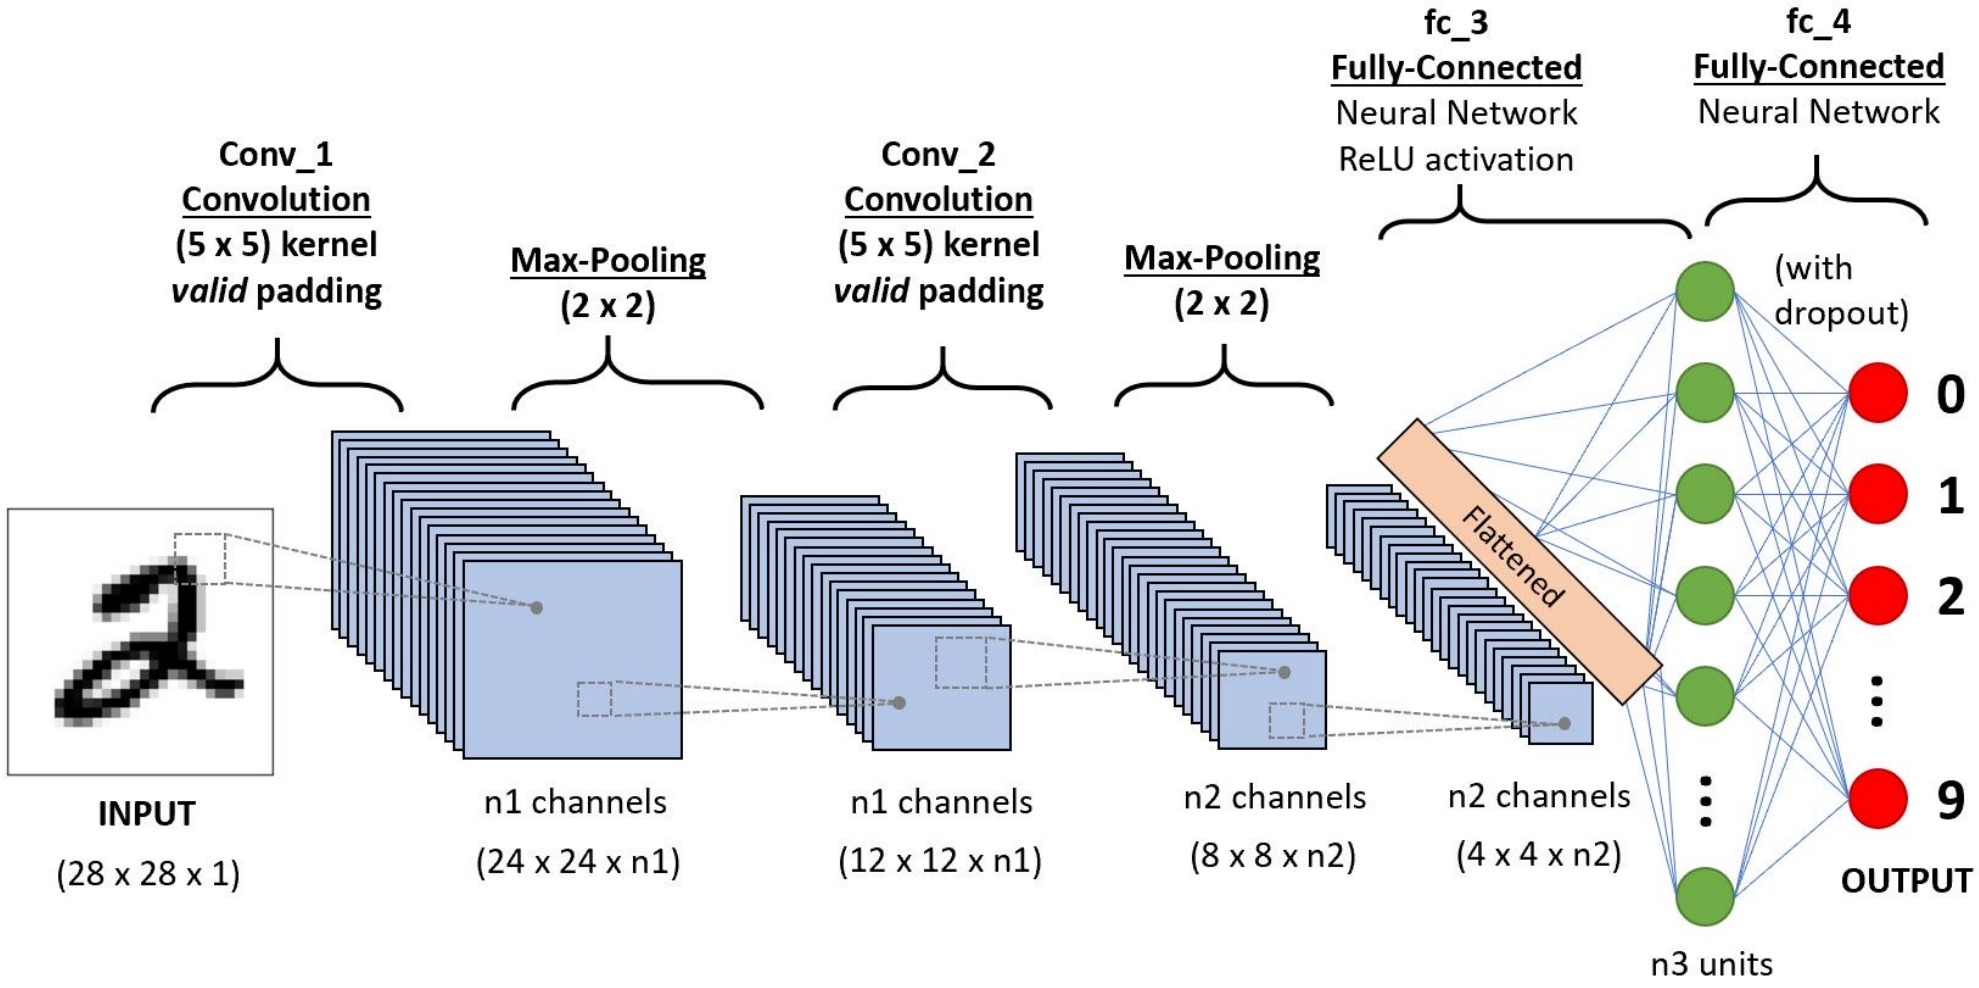
fc_3
Fully-Connected
Neural Network
ReLU activation
fc_4
Fully-Connected
Neural Network
Conv_1
Convolution
(5 x 5) kernel
valid padding
Max-Pooling
(2 x 2)
Conv_2
Convolution
(5 x 5) kernel
valid padding
Max-Pooling
(2 x 2)
(with
dropout)
Flattened
0
1
2
9
INPUT
(28 x 28 x 1)
n1 channels
(24 x 24 x n1)
n1 channels
(12 x 12 x n1)
n2 channels
(8 x 8 x n2)
n2 channels
(4 x 4 x n2)
n3 units
OUTPUT

LeNet

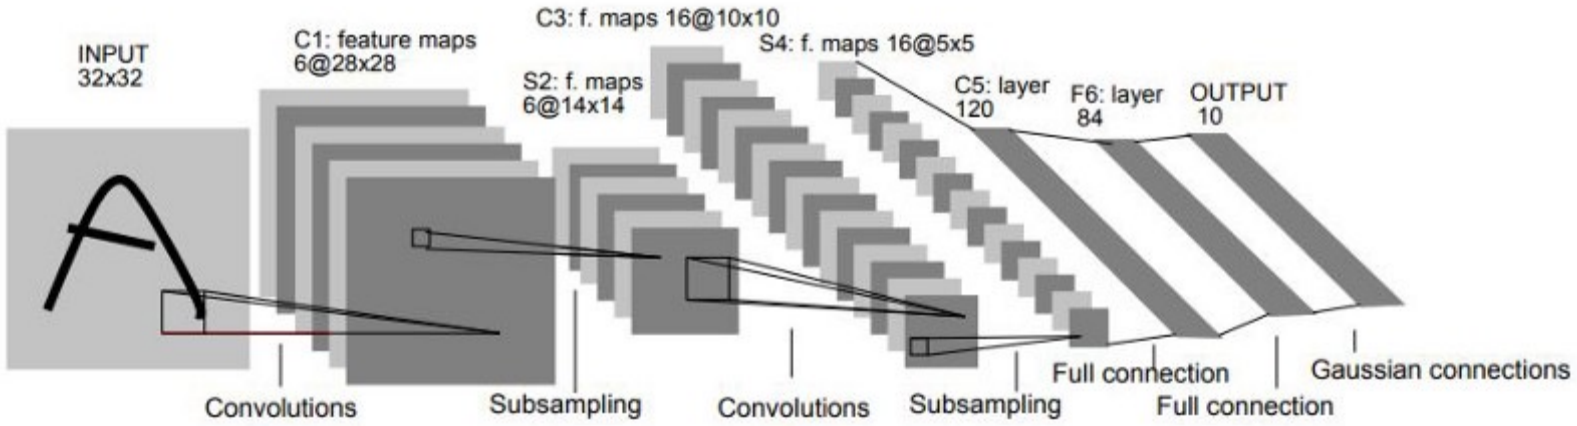

Layer		Feature Map	Size	Kernel Size	Stride	Activation
Input	Image	1	32x32	-	-	-
1	Convolution	6	28x28	5x5	1	tanh
2	Average Pooling	6	14x14	2x2	2	tanh
3	Convolution	16	10x10	5x5	1	tanh
4	Average Pooling	16	5x5	2x2	2	tanh
5	Convolution	120	1x1	5x5	1	tanh
6	FC	-	84	-	-	tanh
Output	FC	-	10	-	-	softmax