



UNIVERSIDAD UTE

DESARROLLO DE SOFTWARE

**TECNOLOGÍAS DE CALIDAD
DE SOFTWARE**

**ASEGURAMIENTO DE CALIDAD (QA)
EVIDENCIAS DEL PROYECTO GIT**

AUTOR

Eduardo Yoshihiko Pérez Iwanaga


PROFESOR

Francisco Higuera

**QUITO – ECUADOR
2026**

GIT COLABORATIVO

Enlace github: <https://github.com/JDRC7/Ecommerce-api-git.git>

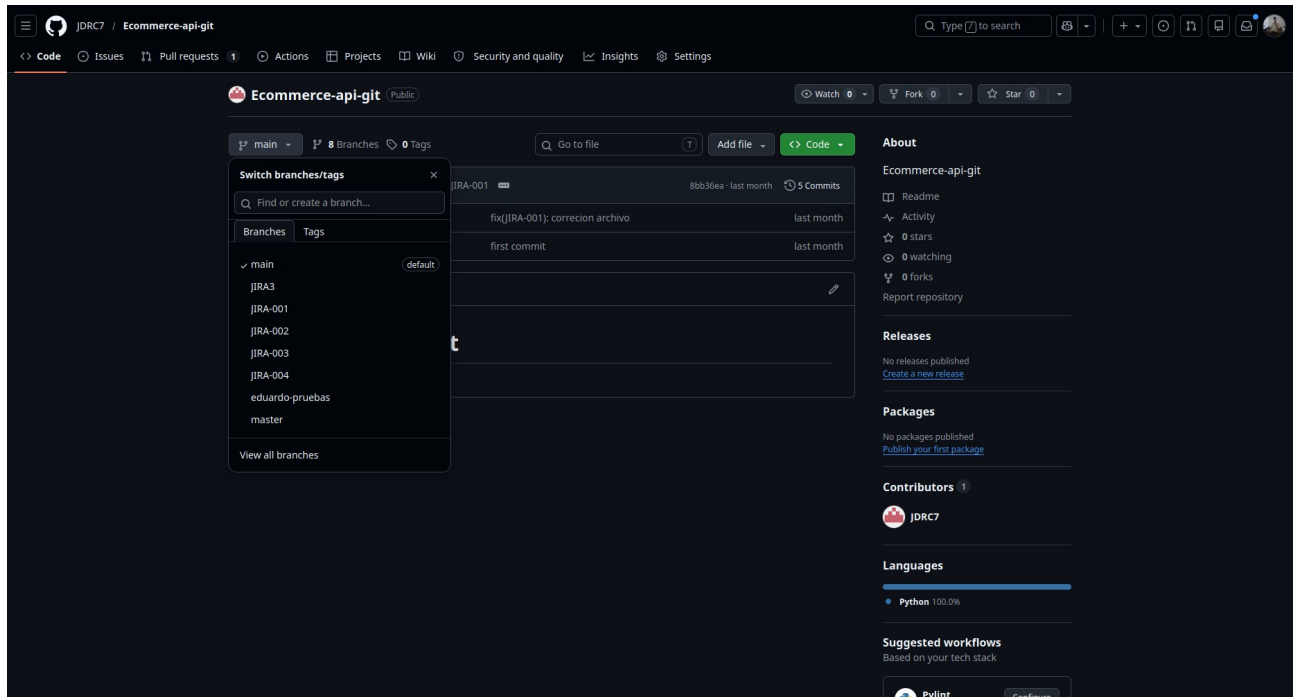

```
yochan@yochan-Aspire-A315-44P: ~/QA-colaborativo/Ecommerce-api-git 2
* bba5112 (HEAD -> main) Merge branch 'JIRA-002' of https://github.com/JDRC7/Ecommerce-api-git
|
| * 3a1843e (origin/JIRA-002) 20/04/2026
| * 4e8540a 20/04/2026
| * b67bac4 Agrego email.py
| * bb30699 (origin/JIRA-004) 20/04/2026
| * 56e4e55 20/04/2026
|
| |
| | * f822e3b comando git
| | * b3e0289 Feat (JIRA-002): se incluyo programa orincipal
| | * 12ae789 Clon JIRA-001 {JOSUE RUIZ}
| |
| | 8bb36ea (origin/main, origin/JIRA3, origin/JIRA-003, origin/HEAD) Merge pull request #1 from JDRC7/JIRA-001
| |
| | * 54e3193 (origin/JIRA-001) Merge pull request #3 from JDRC7/eduardo-pruebas
| |
| | |
| | | * 0db583c (origin/eduardo-pruebas) qa 2
| | |
| | | * 6cb90d5 qa
| |
| * 4c5a7c1 fix(JIRA-001): correcion archivo
| * 5504dc8 feat(JIRA-001): Creacion archivo order service con funcion calcular total
| * 8b2da92 feat(JIRA-001): Creacion archivo order servicio con funcion calcular total
|
|/
* c167e70 first commit
* b640322 (origin/master) QA
* 924fcc5 Fusionar repositorio de API al proyecto principal
~
~
```

```
bba5112 (HEAD -> main) Merge branch 'JIRA-002' of https://github.com/JDRC7/Ecommerce-api-git
56e4e55 20/04/2026
8bb36ea (origin/main, origin/JIRA3, origin/JIRA-003, origin/HEAD) Merge pull request #1 from JDRC7/JIRA-001
yochan@yochan-Aspire-A315-44P:~/QA-colaborativo/Ecommerce-api-git$
```

COMANDOS GIT

```
# COMANDOS GIT

..
# Visualizar cambios
git status
# Comprometer todos los cambios
git add .
# Comprometer los cambios especificos
git add archivo deseado
# Subir cambios de manera local
git commit
# Subir cambios de manera local añadiendo un comentario
git commit -m "comentarios"
# Subir cambios al repositorio a la rama en que estemos
git push
# Subir cambios al repositorio indicandole en que rama
git push origin (rama)

# Consultar logs

git log
git log --oneline
git config user.email
git log --oneline --graph --all
git log --stat
git log -p
git log --oneline -10
git log --author="yochanperezperez@gmail.com"

# Por fecha

git log --after="2026-01-01"
git log --before="2026-04-01"
git log --after="2026-01-01" before="2026-04-01"
git log .\main.py

# Consultar git especifico
git show b3e0289ec991dfb185fbc4e10927623ad1213277
git show b3e0289ec991dfb185fbc4e10927623ad1213277 --name-only
git show b3e0289ec991dfb185fbc4e10927623ad1213277 --stat
git show b3e0289ec991dfb185fbc4e10927623ad1213277:services/order_service.py
git ls-tree b3e0289ec991dfb185fbc4e10927623ad1213277
git diff b3e0289ec991dfb185fbc4e10927623ad1213277

# Modificar el último commit

git commit --amend -m "feat"

# ver ramas locales y remotas

git branch -a
```

```
git commit --amend -m "feat"

# ver ramas locales y remotas

git branch -a

# Crear rama

git branch FEATURE/RAMA-NUEVA

# Cambiar de rama

git switch FEATURE/RAMA-NUEVA

# Configuraciones

git config --global user.name "yochanperez"
git config --global user.email "yochanperez@gmail.com"
git config --global core.editor "code -wait"
git config --global initdefaultBranch main"

# Stage

# Quitar un archivo específico del Stage
git reset HEAD nombre_archivo.js

# Quitar TODOS los archivos que acabas de agregar al Stage
git reset HEAD

# Ver la diferencia de código de los archivos que ya están en el Stage
git diff --cached
```

```
yochan@yochan-Aspire-A315-44P:~/QA$ git log
commit 40ef3d4aff29c301d06078bb64ca3c1a7fe02874 (HEAD -> master, origin/master)
Author: yochan <iwanagayoshihiko@gmail.com>
Date: Tue May 26 09:03:50 2026 -0500
```

Primer Corte



```
commit f86a317288e4485e97e136435973824d48f9fb37
Author: yochan <iwanagayoshihiko@gmail.com>
Date: Mon May 18 13:00:48 2026 -0500
```



calidad



```
yochan@yochan-Aspire-A315-44P:~/QA$ █
```

N8N

Enlace: https://github.com/yochanperez/calidad_software_perez.gitw

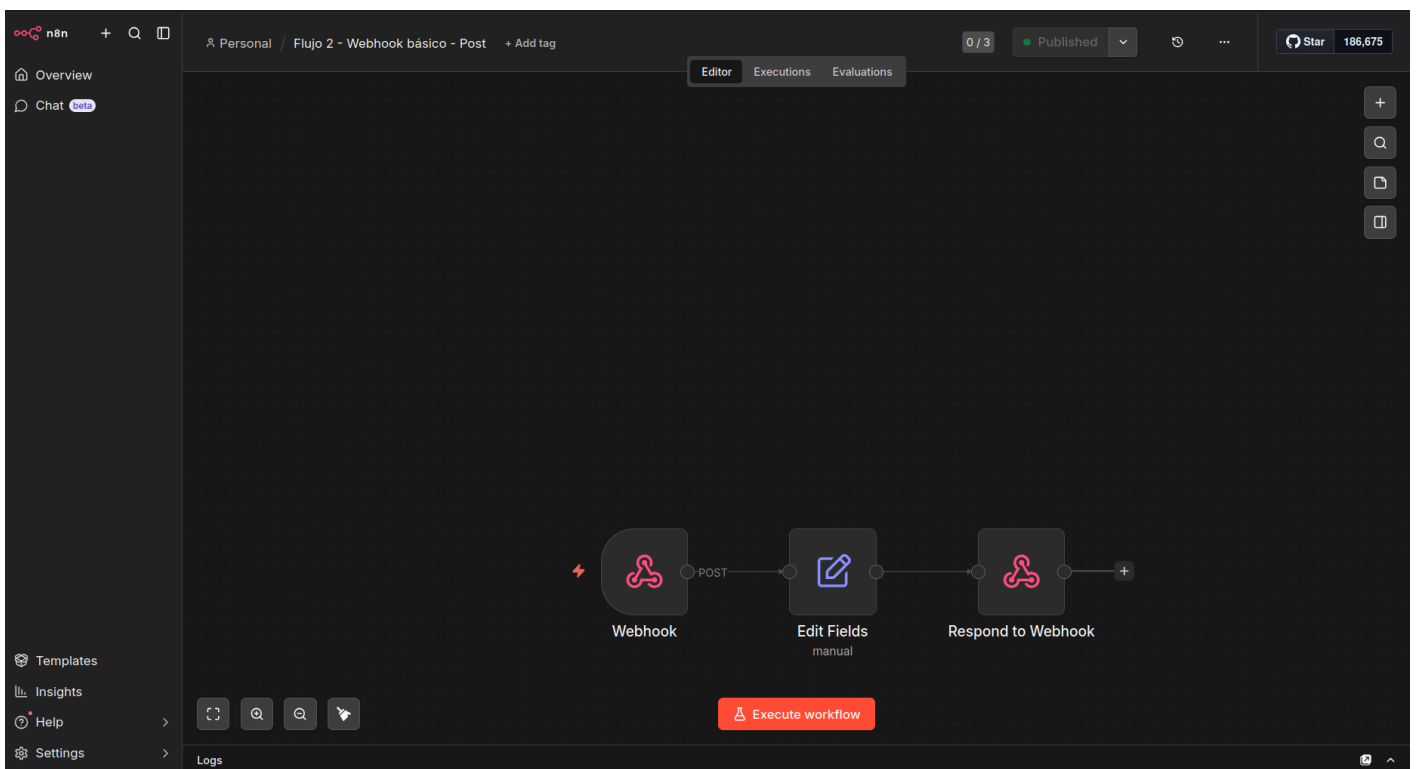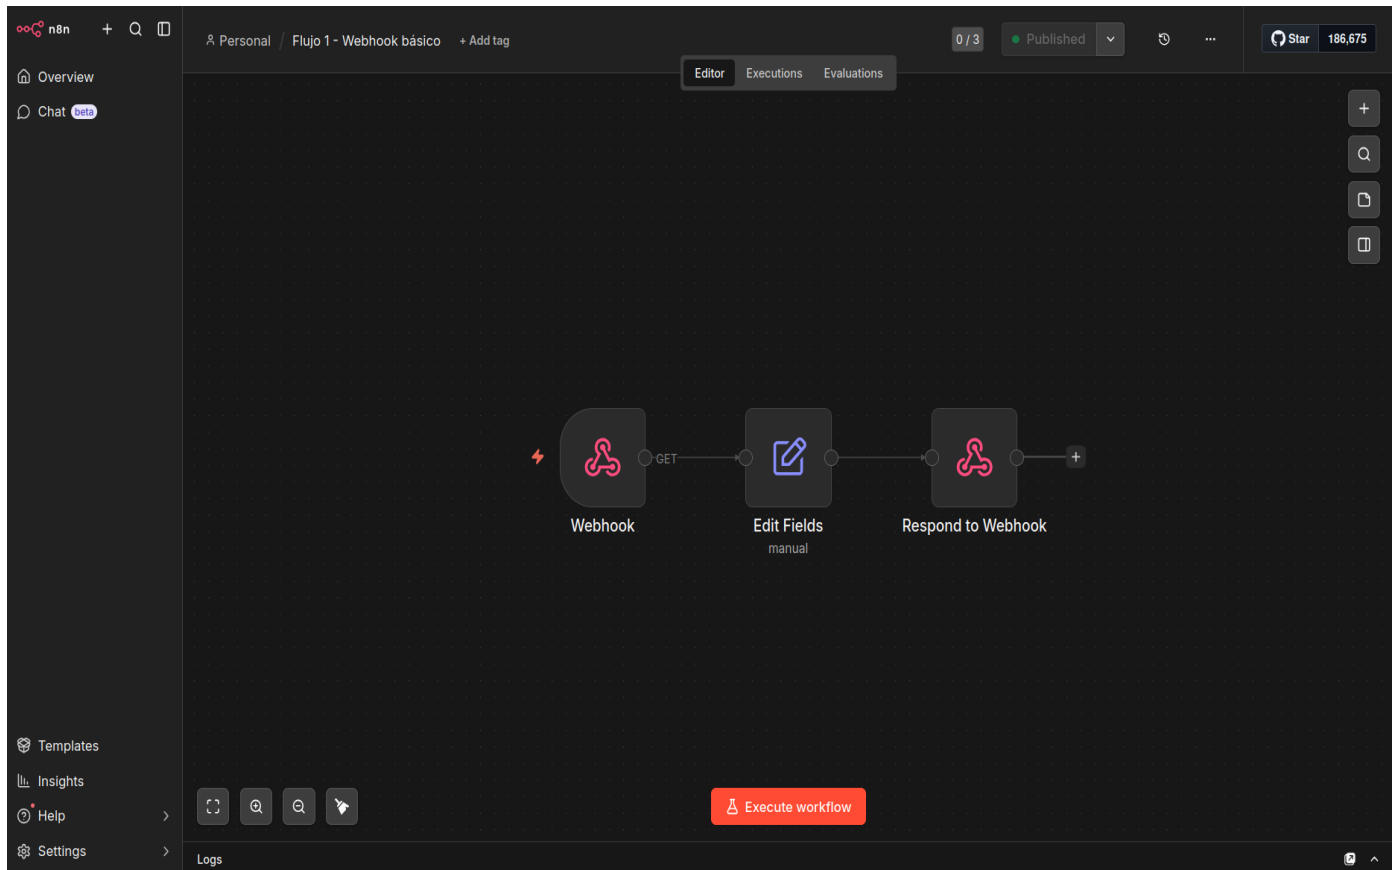

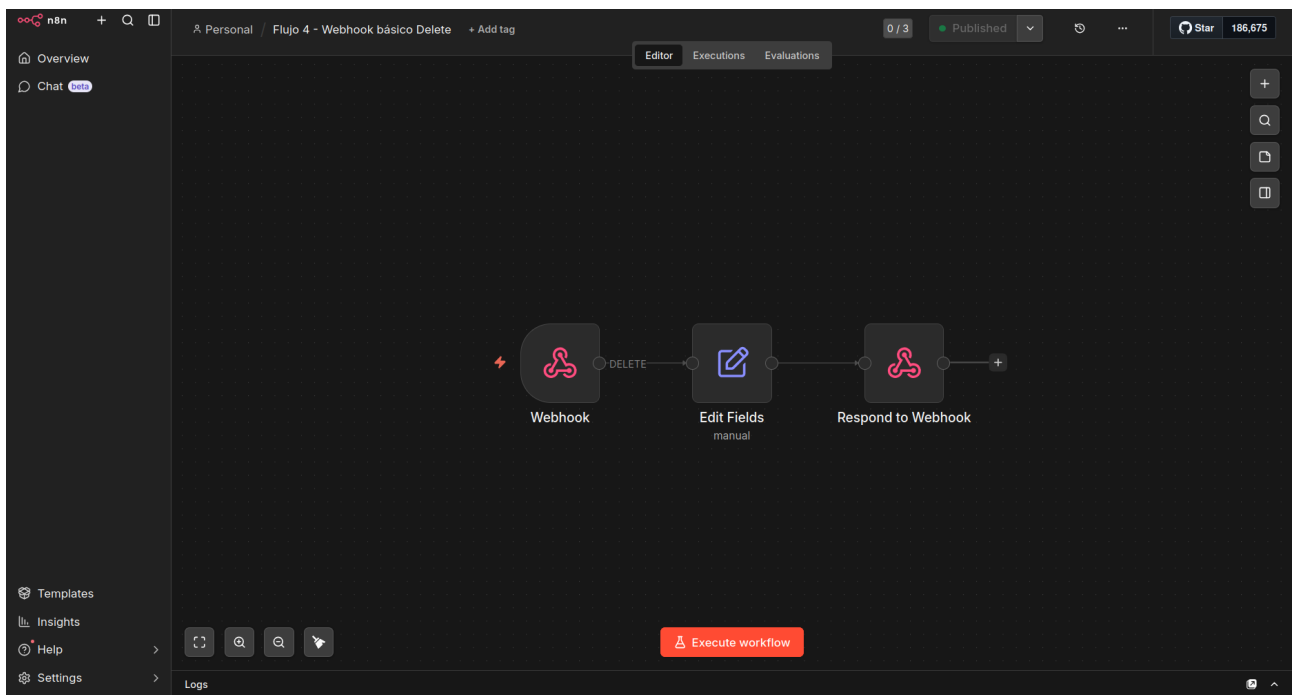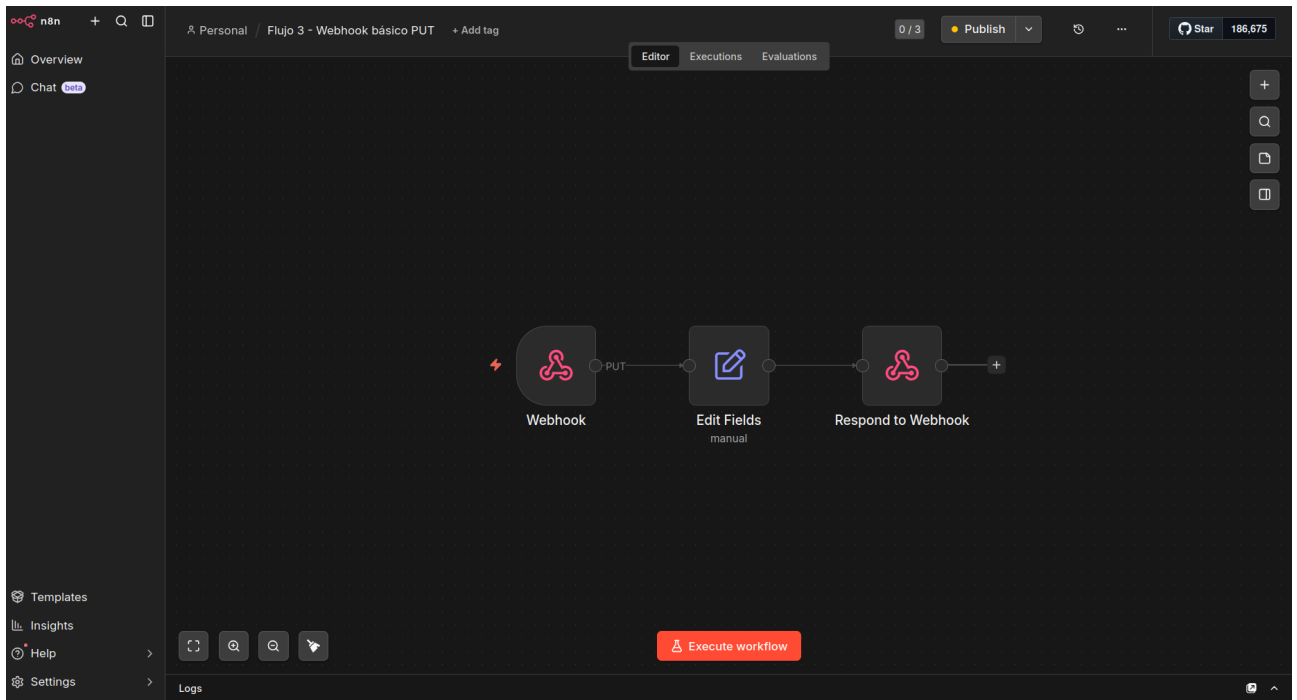

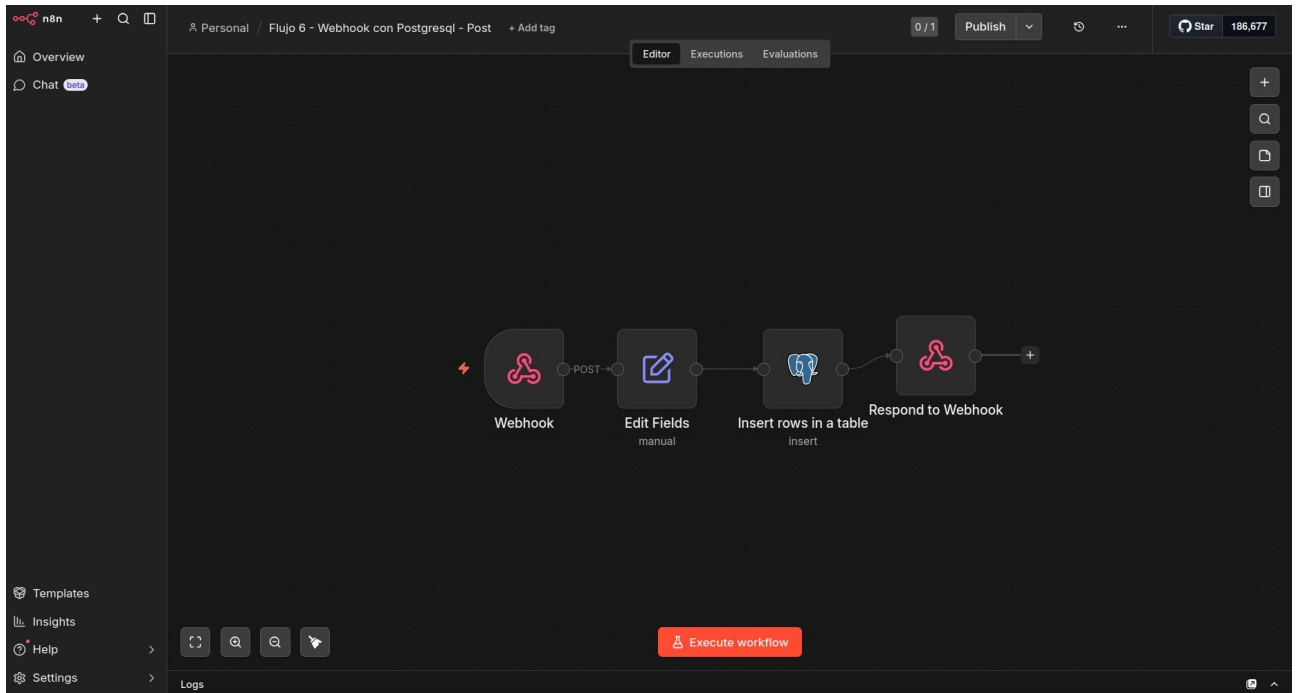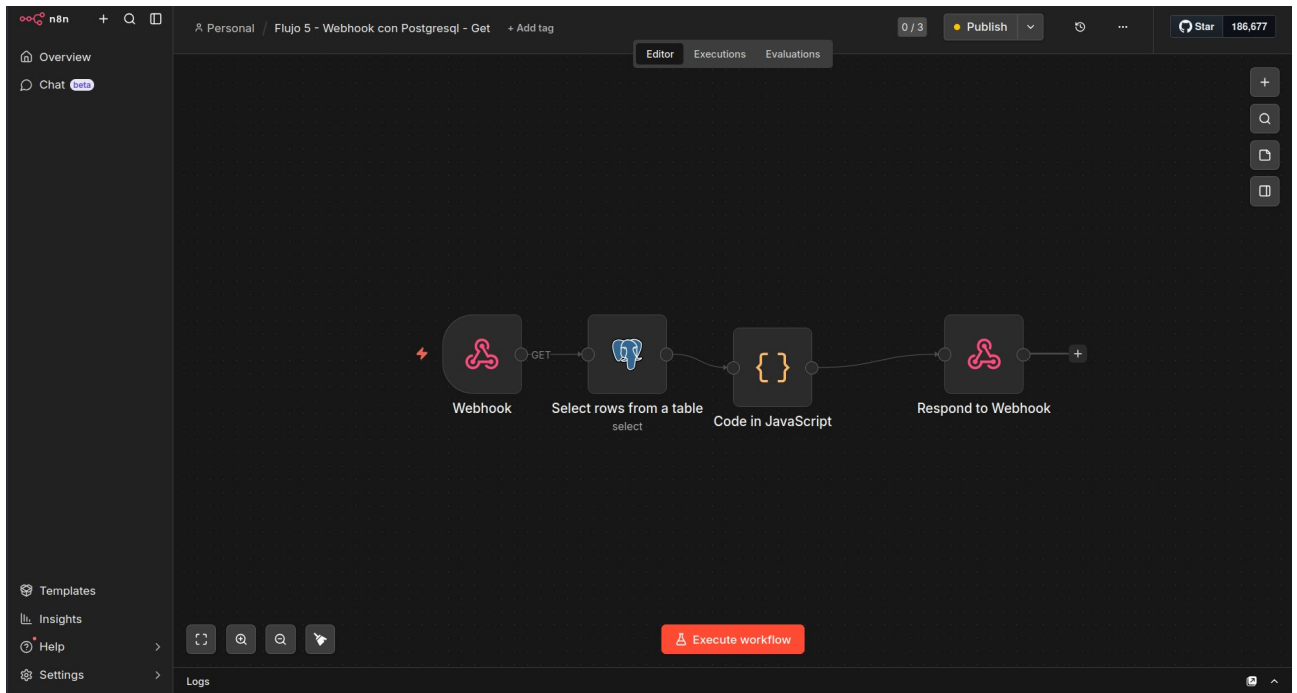

n8n

Overview

Chat beta

Templates

Insights

Help

Settings

Personal / Flujo 7 - Webhook con Postgresql - PUT

+ Add tag

0 / 1

Publish

Star 186,677

Editor

Executions

Evaluations

Execute workflow

Webhook

PUT

Edit Fields
manual

Update rows in a table
update

Respond to Webhook

Execute workflow

Logs

n8n

Overview

Chat beta

Templates

Insights

Help

Settings

Personal / Flujo 8 - Webhook con Postgresql - Get copy

+ Add tag

0 / 1

Publish

Star 186,677

Editor

Executions

Evaluations

Webhook

DELETE

Edit Fields
manual

Delete table or row
deleteTable

Respond to Webhook

Execute workflow

Logs

HTTP N8N > Flujo 1 - Webhook básico

GET http://localhost:5678/webhook/perez/saludo?nombre=Eduardo Send

Docs Params Authorization Headers 6 Body Scripts Tests Settings Cookies

Query Params

Key	Value	Description	Bulk Edit	...
✓ nombre	Eduardo			
Key	Value	Description		

Body Cookies Headers 8 Test Results 200 OK • 116 ms • 583 B • Save Response

{ } JSON Preview Visualize

```
1 {
2   "message": ";Hola, Eduardo! Bienvenido a N8N.",
3   "timestamp": "2026-05-05T18:24:41.035Z",
4   "version": "1.0"
5 }
```

HTTP N8N > Flujo 2 Webhook basico - Post

POST http://localhost:5678/webhook-test/perez/saludo2 Send

Docs Params Authorization Headers 8 Body Scripts Tests Settings Cookies



none form-data x-www-form-urlencoded raw binary GraphQL JSON Schema Beautify

```
1 {
2   "nombre": "Carlota",
3   "ciudad": "Guayaquil"
4 }
```

Body Cookies Headers 8 Test Results 200 OK • 66 ms • 520 B • Save Response

{ } JSON Preview Visualize

```
1 {
2   "nombre": "Carlota",
3   "ciudad": "Guayaquil"
4 }
```

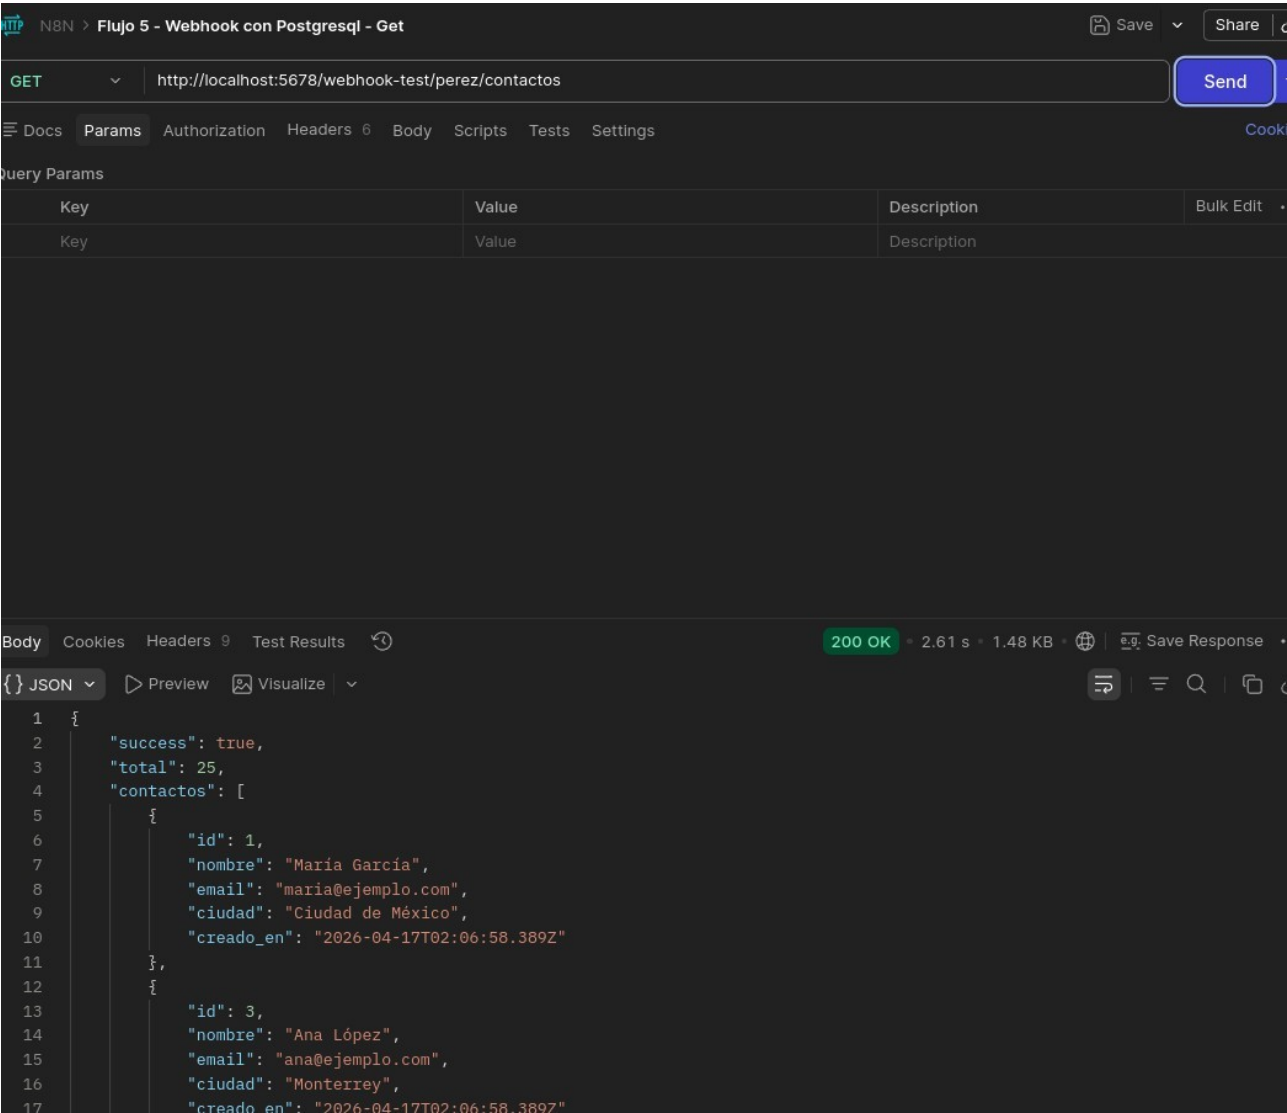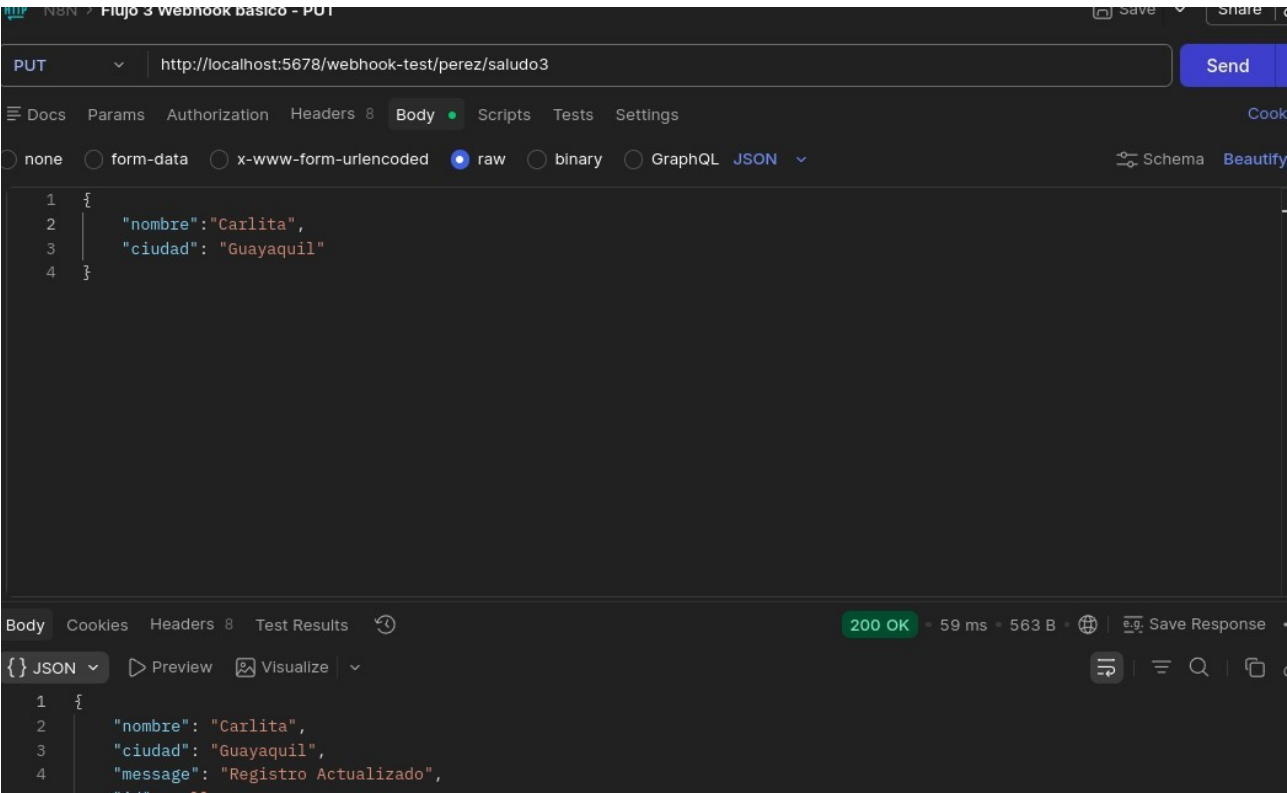

HTTP N8N > Flujo 6 - Webhook con Postgresql - Post

POST http://localhost:5678/webhook-test/perez/contactos Send

Docs Params Authorization Headers 8 Body Scripts Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON Schema Beautify

```
1 {
2   "nombre": "Eduardo Yoshihiko Perez Iwanaga Para borrar 2",
3   "email": "yochanperez@gmail70.com",
4   "ciudad": "Quito"
5 }
```

Body Cookies Headers 8 Test Results 200 OK • 994 ms • 636 B Save Response

{ } JSON Preview Visualize

```
1 {
2   "id": 62,
3   "nombre": "Eduardo Yoshihiko Perez Iwanaga Para borrar 2",
4   "email": "yochanperez@gmail70.com",
5   "ciudad": "Quito",
6   "creado_en": "2026-05-05T23:29:12.569Z"
7 }
```

HTTP N8N > Flujo 7 - Webhook con Postgresql - PUT

PUT http://localhost:5678/webhook-test/5d1e81ac-93e1-4ac1-bbbf-658e528b6828 Send

Docs Params Authorization Headers 8 Body Scripts Tests Settings Cookies

none form-data x-www-form-urlencoded raw binary GraphQL JSON Schema Beautify

```
1 {
2   "nombre": "Eduardo Yoshihiko Perez Iwanaga",
3   "email": "yochanperez@gmail.com",
4   "ciudad": "Quito",
5   "id": "62"
6 }
```

Body Cookies Headers 6 Test Results 200 OK • 1.07 s • 201 B Save Response

GET http://localhost:5678/webhook-test/perez/contacto-by-id?id=62 Send

Docs Params Authorization Headers 6 Body Scripts Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON Schema Beautify

1

Body Cookies Headers 8 Test Results 200 OK • 643 ms • 636 B • Save Response

{ } JSON Preview Visualize

```
1 {
2   "id": 62,
3   "nombre": "Eduardo Yoshihiko Perez Iwanaga Para borrar 2",
4   "email": "yochanperez@gmail70.com",
5   "ciudad": "Quito",
6   "creado_en": "2026-05-05T23:29:12.569Z"
7 }
```

DELETE http://localhost:5678/webhook-test/perez/contactos?id=62 Send

Docs Params Authorization Headers 6 Body Scripts Tests Settings

Query Params

Key	Value	Description	Bulk
✓ id	62		
Key	Value	Description	

Body Cookies Headers 8 Test Results 200 OK • 755 ms • 495 B • Save Response

{ } JSON Preview Visualize

```
1 {
2   "success": true
3 }
```

Edit Fields

SchemaTableJSON

Webhook

Preview

The fields below come from the last successful execution. **Execute node** to refresh them.

headers

user-agent

accept

postman-token

host

accept-encoding

connection

params

query

body

nombre

webhookUrl

executionMode

Variables and context

Parameters

Settings

Execute step

Mode

Manual Mapping

Fields to Set

message

T String

=

{{ "¡Hola, " + \$json.query.nombre + "! Bienvenido a NBN." }}

timestamp

T String

=

{{ new Date().toISOString() }}

2026-05-06T00:10:37.911Z

version

T String

1.0

Drag input fields here or Add Field

Include Other Input Fields

Options

+ Add option

Schema

Table

JSON

Docs

An expression is used in 'Fields to Set' in field 2, did you mean to use it in the value instead?

→

No output data

Execute step

or set mock data

Edit Fields

SchemaTableJSON

Webhook

Preview

The fields below come from the last successful execution. **Execute node** to refresh them.

headers

user-agent

accept

postman-token

host

accept-encoding

connection

params

query

body

nombre

webhookUrl

executionMode

Variables and context

Parameters

Settings

Execute step

Mode

Manual Mapping

Fields to Set

message

T String

=

{{ "¡Hola, " + \$json.query.nombre + "! Bienvenido a NBN." }}

timestamp

T String

=

{{ new Date().toISOString() }}

2026-05-06T00:10:37.911Z

version

T String

1.0

Drag input fields here or Add Field

Include Other Input Fields

Options

+ Add option

Schema

Table

JSON

Docs

An expression is used in 'Fields to Set' in field 2, did you mean to use it in the value instead?

→

No output data

Execute step

or set mock data

Respond to Webhook

INPUT

Schema

Table

JSON

▼

Edit Fields

Preview

The fields below come from the last successful execution. **Execute node** to refresh them.

T

message

T

timestamp

T

version

>

Webhook

Preview

>

Variables and context

Parameters

Settings

Execute step

Verify that the "Webhook" node's "Respond" parameter is set to "Using Respond to Webhook Node". [More details](#)

Respond With

First Incoming Item

Options

+ Add option

OUTPUT

Schema

Table

JSON

I→

No output data

Execute step

or set mock data

Webhook

Parameters

Settings

Listen for test event

Webhook URLs

Test URL

Production URL

POST http://localhost:5678/webhook-test/perez/saludo2

HTTP Method

POST

Path

perez/saludo2

Authentication

None

Respond

Using 'Respond to Webhook' Node

Insert a 'Respond to Webhook' node to control when and how you respond. [More details](#)

Options

+ Add option

Pull in events from Webhook

Listen for test event

Once you've finished building your workflow, run it without having to click this button by using the production webhook URL. [More info](#)

When will this node trigger my flow? ▼

OUTPUT

Schema

Table

JSON

No trigger output

Test this trigger

or set mock data

Edit Fields

SchemaTableJSONParametersSettingsExecute step

INPUT

Webhook

The fields below come from the last successful execution. Execute node to refresh them.

headers

content-type

user-agent

accept

postman-token

host

accept-encoding

connection

content-length

params

query

body

nombre

ciudad

webhookUrl

executionMode

Variables and context

Mode

Manual Mapping

Fields to Set

nombre

T String

= {{ \$json.body.nombre }}

ciudad

T String

= {{ \$json.body.ciudad }}

Drag input fields here or Add Field

Include Other Input Fields

Options

+ Add option

I wish this node would...

OUTPUT

SchemaTableJSON

An expression is used in 'Fields to Set' in field 2, did you mean to use it in the value instead?

No output data

Execute step

or set mock data

Edit Fields

SchemaTableJSONParametersSettingsExecute step

INPUT

Webhook

The fields below come from the last successful execution. Execute node to refresh them.

headers

content-type

user-agent

accept

postman-token

host

accept-encoding

connection

content-length

params

query

body

nombre

ciudad

webhookUrl

executionMode

Variables and context

Mode

Manual Mapping

Fields to Set

nombre

T String

= {{ \$json.body.nombre }}

ciudad

T String

= {{ \$json.body.ciudad }}

Drag input fields here or Add Field

Include Other Input Fields

Options

+ Add option

I wish this node would...

OUTPUT

SchemaTableJSON

An expression is used in 'Fields to Set' in field 2, did you mean to use it in the value instead?

No output data

Execute step

or set mock data

Edit Fields

SchemaTableJSON

Webhook

Preview

The fields below come from the last successful execution. **Execute node** to refresh them.

headers

content-type

user-agent

accept

postman-token

host

accept-encoding

connection

content-length

params

query

body

nombre

ciudad

webhookUrl

executionMode

Variables and context

ParametersSettings

Execute step

Mode

Manual Mapping

Fields to Set

nombre

T String

=

{{ \$json.body.nombre }}

ciudad

T String

=

{{ \$json.body.ciudad }}

message

T String

Registro Actualizado

id

T String

=

{{ \$json.query.id }}

Drag input fields here or Add Field

Include Other Input Fields

Options

SchemaTableJSON

OUTPUT

An expression is used in 'Fields to Set' in field 2, did you mean to use it in the value instead?

No output data

Execute step

or set mock data

Webhook

ParametersSettings

Listen for test event

Webhook URLs

Test URLProduction URL

DELETEhttp://localhost:5678/webhook-test/perez/saludo4

HTTP Method

DELETE

Path

perez/saludo4

Authentication

None

Respond

Using 'Respond to Webhook' Node

Insert a 'Respond to Webhook' node to control when and how you respond. [More details](#)

Options

+ Add option

SchemaTableJSON

OUTPUT

No trigger output

Test this trigger

or set mock data

Pull in events from Webhook

Listen for test event

Once you've finished building your workflow, run it without having to click this button by using the production webhook URL. [More info](#)

When will this node trigger my flow?

I wish this node would...

Edit Fields

SchemaTableJSON

Webhook

Preview

The fields below come from the last successful execution. **Execute node** to refresh them.

headers

user-agent

accept

postman-token

host

accept-encoding

connection

params

query

body

id

webhookUrl

executionMode

Variables and context

ParametersSettingsExecute step

Mode

Manual Mapping

Fields to Set

nombre

T String

Juan

Juan

ciudad

T String

Ambato

Ambato

message

T String

Registro borrado

id

T String

{{ \$json.query.id }}

Drag input fields here or Add Field

☐ Include Other Input Fields

SchemaTableJSON

OUTPUT

An expression is used in 'Fields to Set' in field 2, did you mean to use it in the value instead?

No output data

Execute step

or set mock data

Webhook

ParametersSettingsListen for test event

Webhook URLs

Test URLProduction URL

GEThttp://localhost:5678/webhook-test/perez/contactos

HTTP Method

GET

Path

perez/contactos

Authentication

None

Respond

Using 'Respond to Webhook' Node

Insert a 'Respond to Webhook' node to control when and how you respond. [More details](#)

Options

+ Add option

SchemaTableJSON

OUTPUT

No trigger output

Test this trigger

or set mock data

Pull in events from Webhook

Listen for test event

Once you've finished building your workflow, run it without having to click this button by using the production webhook URL. [More info](#)

When will this node trigger my flow?

I wish this node would...

Select rows from a table

Docs

X

INPUT

SchemaTableJSON

Webhook

Preview

The fields below come from the last successful execution.
Execute node to refresh them.

headers

user-agent

accept

postman-token

host

accept-encoding

connection

params

query

body

webhookUrl

executionMode

Variables and context

Parameters

Settings

Execute step

Credential

Postgres account

Operation

Select

Schema

From listpublic

Table

From listclientes

Return All

Limit

50

Select Rows

+ Add Condition

Combine Conditions

AND

Sort

+ Add Sort Rule

Options

+ Add option

OUTPUT

SchemaTableJSON

No output data

Execute step

or set mock data

Code in JavaScript

Docs

X

INPUT

SchemaTableJSON

Select rows from a table

Preview

The fields below come from the last successful execution.
Execute node to refresh them.

id

nombre

email

ciudad

creado_en

Webhook

Variables and context

Parameters

Settings

Execute step

Mode

Run Once for All Items

Language

JavaScript

JavaScript

1const contactos = items.map(item => item.json);

2

3return[{

4 json: {

5 success: true,

6 total: contactos.length,

7 contactos: contactos

8 },

9 }];

Type \$ for a list of special vars/methods. Debug by using console.log() statements and viewing their output in the browser console.

I wish this node would...

OUTPUT

SchemaTableJSON

No output data

Execute step

or set mock data

Webhook

Listen for test event

Webhook URLs

Test URL

Production URL

PUT

http://localhost:5678/webhook-test/5d1e81ac-93e1-4ac1-bbbf-658e528b6828

HTTP Method

PUT

Path

5d1e81ac-93e1-4ac1-bbbf-658e528b6828

Authentication

None

Respond

Using 'Respond to Webhook' Node

Insert a 'Respond to Webhook' node to control when and how you respond. [More details](#)

Options

+
+ Add option

When will this node trigger my flow? ▾

🔗 I wish this node would...

OUTPUT

Schema

Table

JSON

No trigger output

Test this trigger

or set mock data

Edit Fields

Execute step

Parameters

Settings

INPUT

Schema

Table

JSON

Webhook

Preview

The fields below come from the last successful execution. **Execute node** to refresh them.

headers

content-type

user-agent

accept

postman-token

host

accept-encoding

connection

content-length

params

query

body

nombre

email

ciudad

id

webhookUrl

executionMode

Variables and context

Mode

Manual Mapping

Fields to Set

nombre

T String

= {{ \$json.body.nombre }}

ciudad

T String

= {{ \$json.body.ciudad }}

email

T String

= {{ \$json.body.email }}

id

T String

= {{ \$json.body.id }}

Drag input fields here or [Add Field](#)

Include Other Input Fields

Options

+
+ Add option

OUTPUT

Schema

Table

JSON

No output data

Execute step

or set mock data

Update rows in a table

SchemaTableJSON

ParametersSettings

Execute step

INPUT

Edit Fields

The fields below come from the last successful execution. Execute node to refresh them.

T nombre

T ciudad

T email

T id

Webhook

Variables and context

Preview

Credential

Postgres account

Operation

Update

Schema

From listpublic

Table

From listclientes

Mapping Column Mode

Map Each Column Manually

Columns to match on

id

The columns to use when matching rows in Postgres to the input items of this node. Usually an ID.

Values to Update

id (using to match)

fr

{{ \$json.id }}

nombre

fr

{{ \$json.nombre }}

email

fr

{{ \$json.email }}

ciudad

fr

{{ \$json.ciudad }}

OUTPUT

SchemaTableJSON

I→

No output data

Execute step

or set mock data

Webhook

SchemaTableJSON

ParametersSettings

Listen for test event

Pull in events from Webhook

Listen for test event

Once you've finished building your workflow, run it without having to click this button by using the production webhook URL. More info

When will this node trigger my flow?

Webhook URLs

Test URLProduction URL

POSThttp://localhost:5678/webhook-test/perez/contactos

HTTP Method

POST

Path

perez/contactos

Authentication

None

Respond

Using 'Respond to Webhook' Node

Insert a 'Respond to Webhook' node to control when and how you respond. More details

Options

+ Add option

I wish this node would...

OUTPUT

SchemaTableJSON

No trigger output

Test this trigger

or set mock data

Edit Fields

SchemaTableJSON

Webhook

The fields below come from the last successful execution. **Execute node** to refresh them.

headers

T content-type

T user-agent

T accept

T postman-token

T host

T accept-encoding

T connection

T content-length

params

query

body

T nombre

T email

T ciudad

T webhookUrl

T executionMode

Variables and context

ParametersSettings

Execute step

Mode

Manual Mapping

Fields to Set

nombre

T String

= {{ \$json.body.nombre }}

ciudad

T String

= {{ \$json.body.ciudad }}

email

T String

= {{ \$json.body.email }}

name

T String

value

Drag input fields here or Add Field

☐ Include Other Input Fields

Options

OUTPUT

SchemaTableJSON

No output data

Execute step

or set mock data

Insert rows in a table

SchemaTableJSON

Edit Fields

The fields below come from the last successful execution. **Execute node** to refresh them.

T nombre

T ciudad

T email

Webhook

Variables and context

ParametersSettings

Execute step

Credential

Postgres account

Operation

Insert

Schema

From list public

Table

From list clientes

Mapping Column Mode

Map Each Column Manually

Values to Send

nombre

/s {{ \$json.nombre }}

email

/s {{ \$json.email }}

ciudad

/s {{ \$json.ciudad }}

+ Add column to send

Options

+ Add option



OUTPUT

SchemaTableJSON

No output data

Execute step

or set mock data

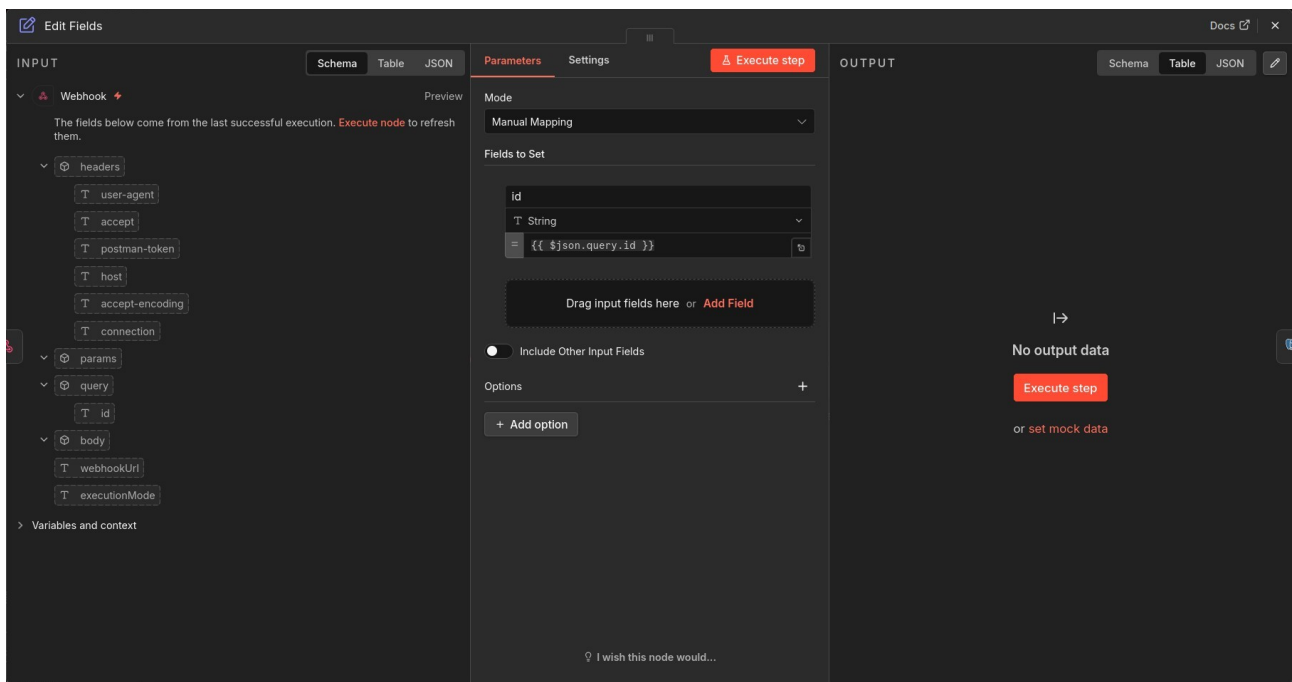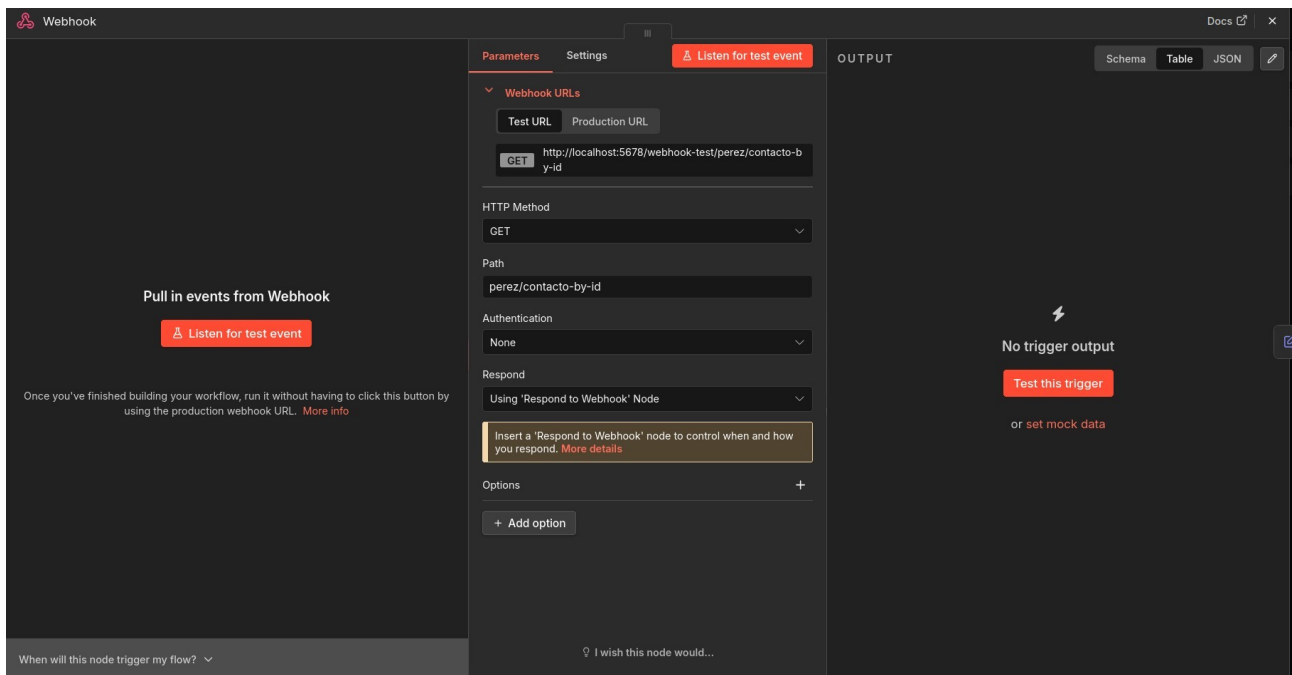

Select rows from a table

Docs

SchemaTableJSON

Execute step

INPUT

Edit Fields

The fields below come from the last successful execution. Execute node to refresh them.

Tid

Webhook

Variables and context

Preview

ParametersSettings

Credential

Postgres account

Operation

Select

Schema

From listpublic

Table

From listclientes

Return All

Limit

50

Select Rows

Values 1

Column

id

Operator

Equal

Value

{{ \$json.id }}

Add Condition

OUTPUT

SchemaTableJSON

No output data

Execute step

or set mock data

Webhook

Docs

ParametersSettings

Listen for test event

Webhook URLs

Test URLProduction URL

DELETE

http://localhost:5678/webhook-test/perez/contactos

HTTP Method

DELETE

Path

perez/contactos

Authentication

None

Respond

Using 'Respond to Webhook' Node

Insert a 'Respond to Webhook' node to control when and how you respond. More details

Options

Add option

OUTPUT

SchemaTableJSON



No trigger output

Test this trigger

or set mock data


When will this node trigger my flow?

I wish this node would...

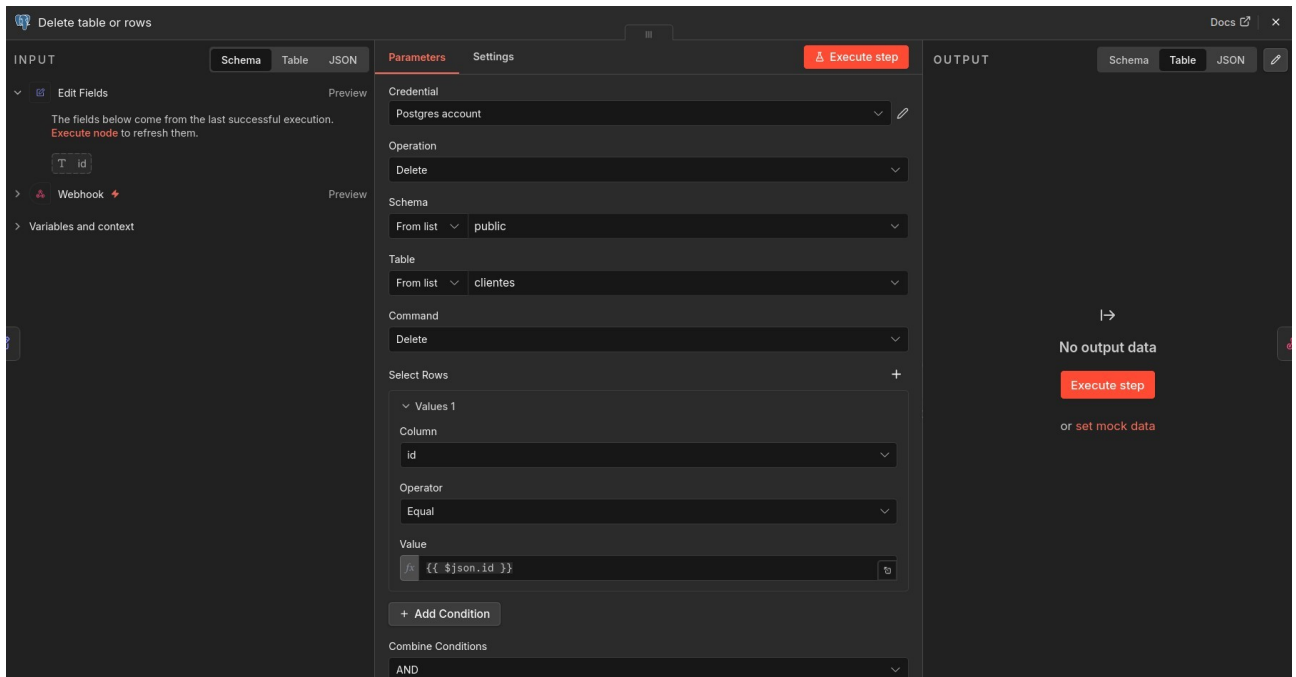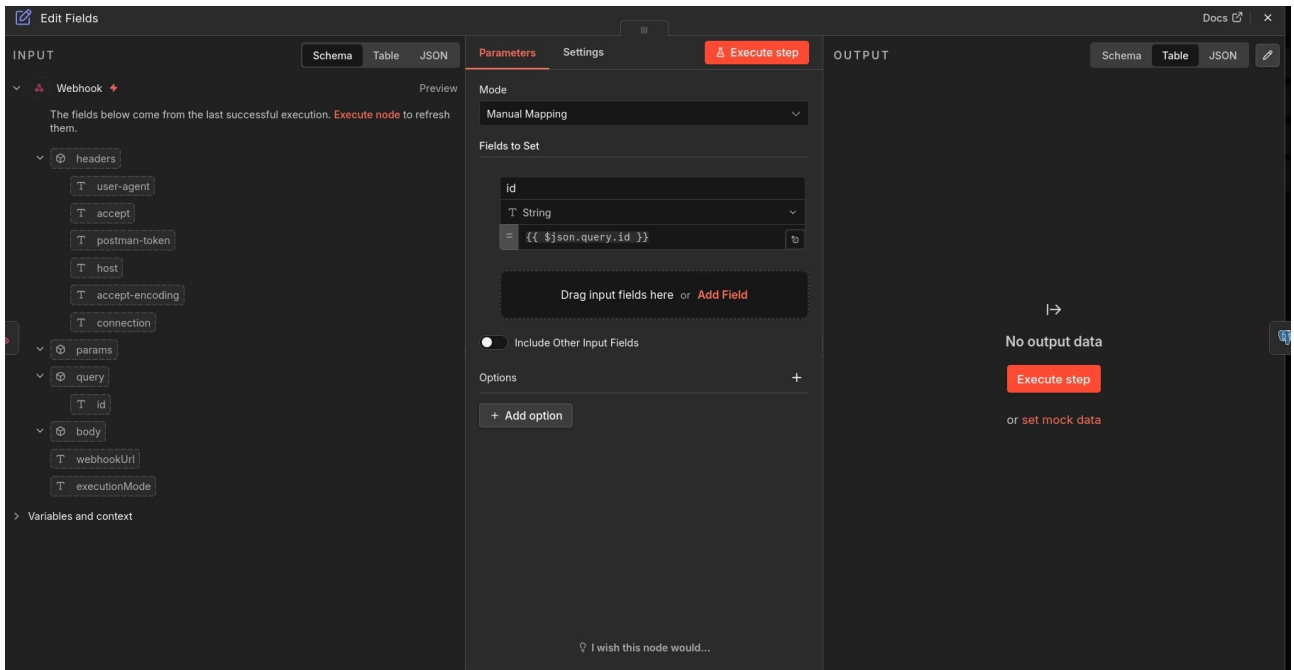

JEST

Condicionales

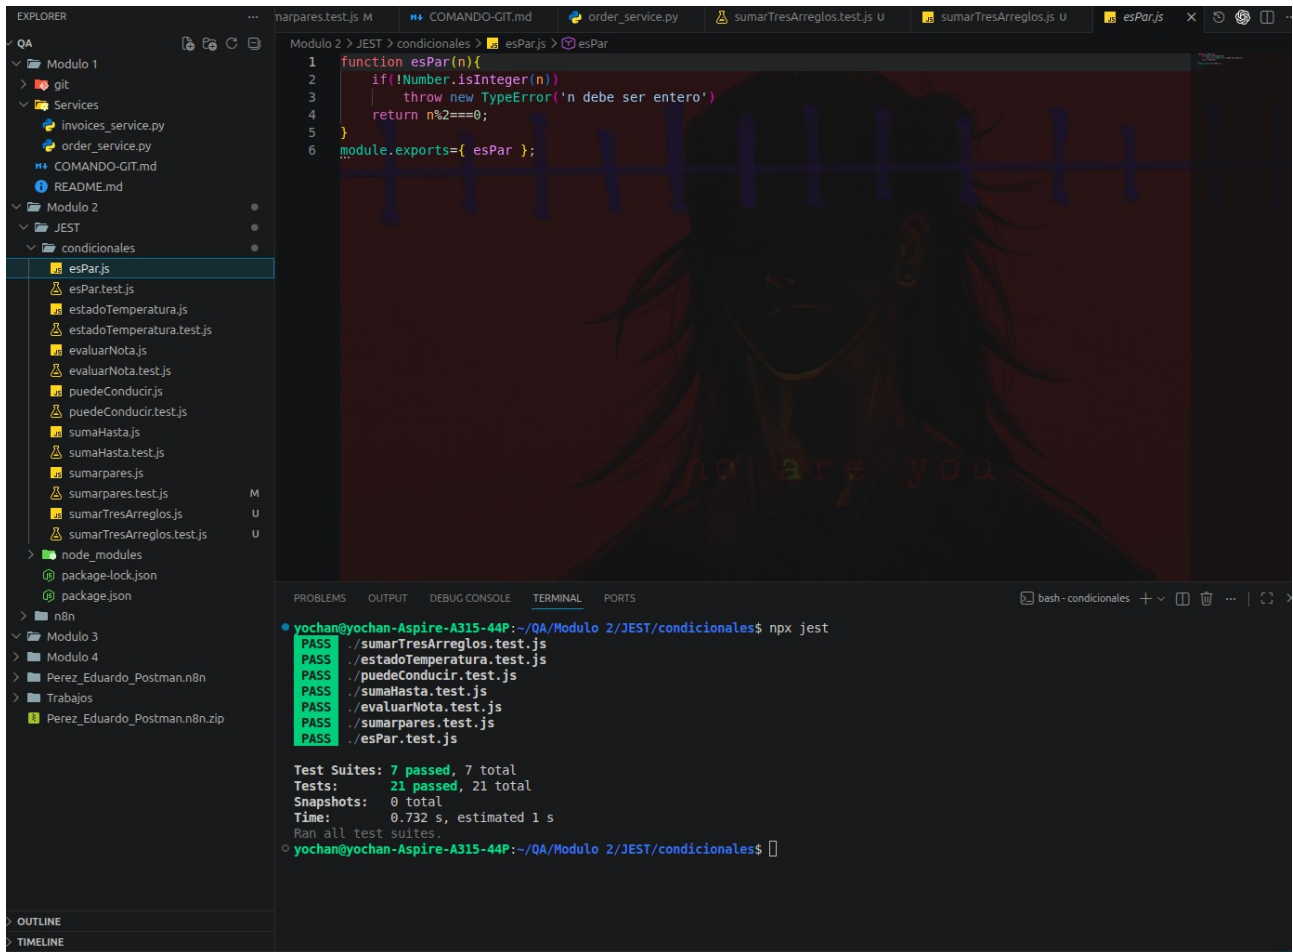

```
1 function esPar(n){
2   if(!Number.isInteger(n))
3     throw new TypeError('n debe ser entero')
4   return n%2===0;
5 }
6 module.exports={ esPar };
```

```
yochan@yochan-Aspire-A315-44P:~/QA/Modulo 2/JEST/condicionales$ npx jest
PASS ./sumarTresArreglos.test.js
PASS ./estadoTemperatura.test.js
PASS ./puedeConducir.test.js
PASS ./sumaHasta.test.js
PASS ./evaluarNota.test.js
PASS ./sumarPares.test.js
PASS ./esPar.test.js

Test Suites: 7 passed, 7 total
Tests: 21 passed, 21 total
Snapshots: 0 total
Time: 0.732 s, estimated 1 s
Ran all test suites.
```