

FREQUENCY

VERIFIABLE PROOF-OF-WORK ENGINEERING DISCOVERY & HIRING

Proof you can inspect. Skills you can trust.

Team HM26-C3B5 · Members: [YOGESH S] · Colleges: [Amrita
School Of Computing]

· Members: [AMAL]
· Colleges: [Jain Deemed to be University]

· Members: [NISHKALA G B] ·

Colleges: [Amrita School Of Computing]
Selected problem · The proof gap in cybersecurity hiring

THE PROOF GAP

Resumes and certificates show claims. They rarely show reproducible work, sound reasoning, or how a candidate explains a finding.

A MYSURU HIRING SCENARIO

A local team screens many applicants. A capable candidate without a familiar credential is easy to miss; an inflated claim is hard to verify.

Candidates lose visibility. Reviewers spend time rechecking. Recruiters lack comparable evidence.

WHO IT SERVES

CANDIDATE

Demonstrates work through a finding, assessment and technical defense. Needs a clear path and low-bandwidth access.

REVIEWER

Checks reproduction evidence, records a decision and scores defense. Human judgment remains authoritative.

RECRUITER

Filters evidence-backed profiles and reviews sanitized proof before inviting candidates.

FROM WORK TO PROOF


- 01 Candidate completes a section assessment and submits a structured finding.
- 02 API scores answers server-side and hashes submitted evidence.
- 03 Reviewer reproduces, questions and records a decision.
- 04 Verified records inform capability and proof-confidence signals.
- 05 Recruiter inspects sanitized proof and can invite the candidate.

PRODUCT CAPTURE NEEDED

No genuine screenshots are checked in. Replace this with a capture of the running product.

ARCHITECTURE

React + TypeScript role workspaces → Flask modular API → PostgreSQL

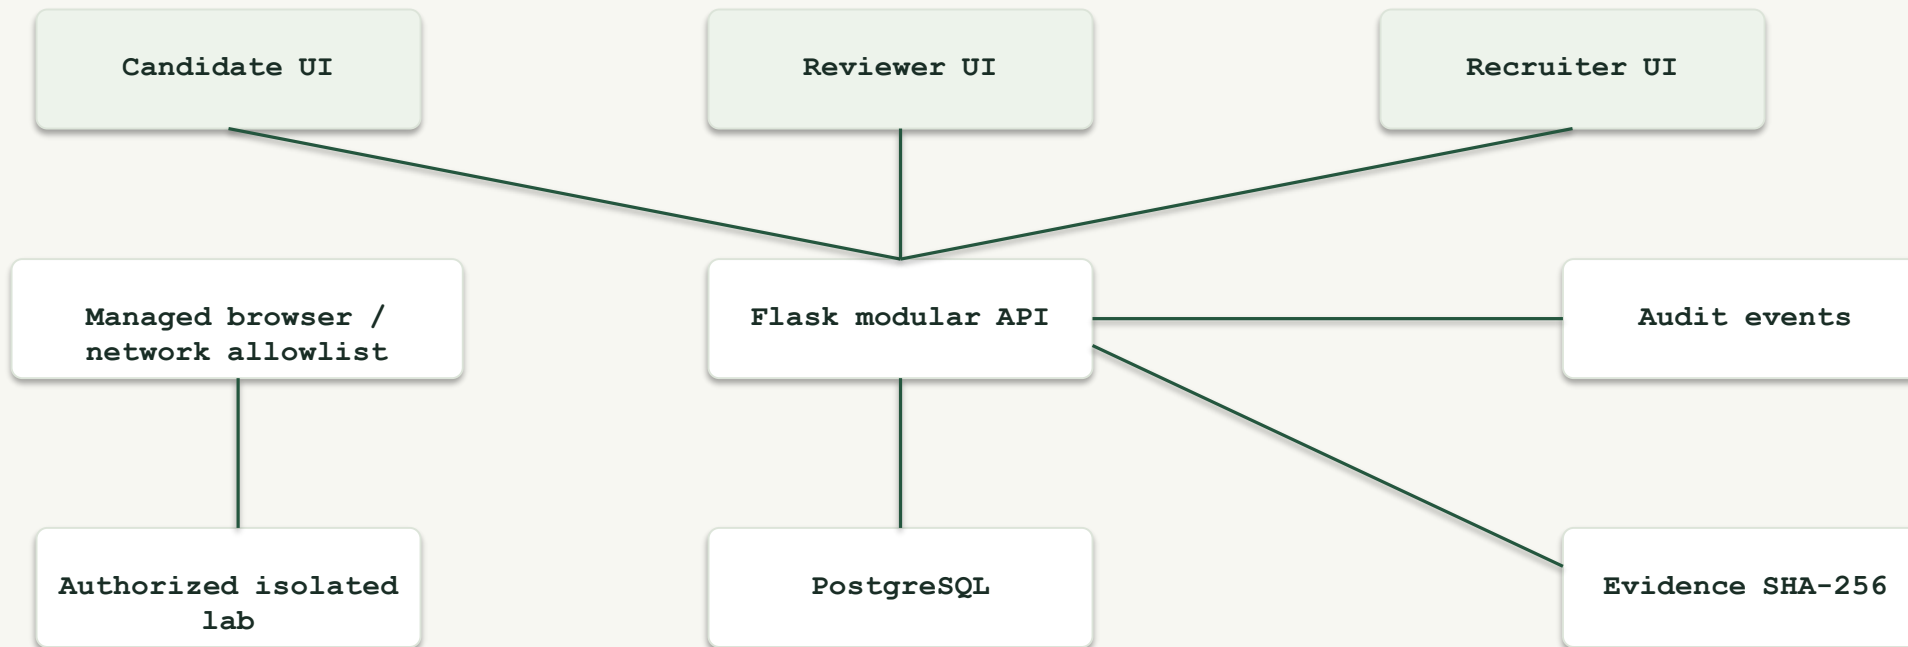

API records audit events and hashes evidence. Candidate lab UI is synthetic; no isolated target is provisioned.

CONSTRAINTS & HONEST STATUS

Evidence integrity · SHA-256 hash and duplicate flag in API | PARTIAL

Jurisdiction · No isolated lab provisioned; do not test arbitrary targets |
NOT BUILT

Priority · Human reviewer controls verification | HANDLED

Bad input · API validates assessment shape and finding fields | PARTIAL

Offline · Local SQLite fallback; no offline sync guarantee | PARTIAL

THE KEY DECISION

CHOSEN

Deterministic server-side scoring + structured evidence + human reviewer authority

REJECTED

LLM as final grader: faster feedback, but less repeatable and harder to defend on adversarial evidence.

TRADE-OFF ACCEPTED

Human review takes longer and creates a reviewer-capacity bottleneck. The MVP favors explainable decisions.

WHAT THE CODE PROVES

API flow

Assessment answer keys stay server-side; each section score is persisted.

Review flow

Human reviewer decisions, defense responses and rubric values have API persistence.

Discovery boundary

API sanitizes verified proof. Some candidate and recruiter screens still use synthetic data.

REAL CAPTURE SLOTS

Add 2-3 genuine screenshots: candidate assessment, reviewer decision, recruiter sanitized proof. None are checked in.



YO



PHASE 1 QUALIFIED TEAMS

[→\] Team Dashboard >](#)

24 TEAMS QUALIFIED

#	QUALIFIED TEAM	COLLEGE & LOCATION	JURY SCORE	PHOTO
1	TEAM LUFFY FINALIST	Amrita school of education	79 / 100	

The screenshot shows the Chrome DevTools Network tab. The filter is set to 'Fetch/XHR'. The selected request is 'teams?select=*'. The response is a JSON array of team objects. The first team is 'Abhishek' and the second is 'Manoj TM'. The status bar shows 4/17 requests and 20.9 kB / 24.7 kB.

Name	Headers	Payload	Preview	Response	Initiator	Timing	Adblock	Cookies
teams?select=*	-	-	-	<pre> "email": "abhishek.dustbin@gmail.com", "phone": "6360518036", "course": "BE/B.Tech", "college": "MRIT" }, { "name": "Padmanabharao P", "role": "", "year": "2027", "email": "padmanabharao23@gmail.com", "phone": "7892469052", "course": "BE/B.Tech", "github": "", "college": "MRIT", "linkedin": "" }, { "name": "Manoj TM", "role": "", "year": "2027", "email": "manojtm_gy27@mysururoyal.org", "phone": "8197450833", "course": "BE/B.Tech", "github": "", "college": "MRIT", "linkedin": "" }], "payment_status": "verified", "payment_rejection_reason": null, </pre>	-	-	-	-
get_public_qualified_teams	-	-	-	-	-	-	-	-
user	-	-	-	-	-	-	-	-
app_settings?select=*	-	-	-	-	-	-	-	-

4 / 17 requests | 20.9 kB / 24.7 kB { }

NEXT & DISCLOSURE

- 1 Connect role pages to authenticated persisted records.
- 2 Provision isolated, resettable labs with egress denied.
- 3 Add shared rate limiting, monitoring and peak-load tests.

AI disclosure: Claude/Gemini assisted development; no runtime LLM makes hiring decisions.

LIVE MVP	https://proofforge-cyber.onrender.com
REPOSITORY	github.com/yogesh-37911/HM26-C3B5-Phase2