


MileStone 3 - SecureNotesApi


I have Choose Web Api

1. Project Structure

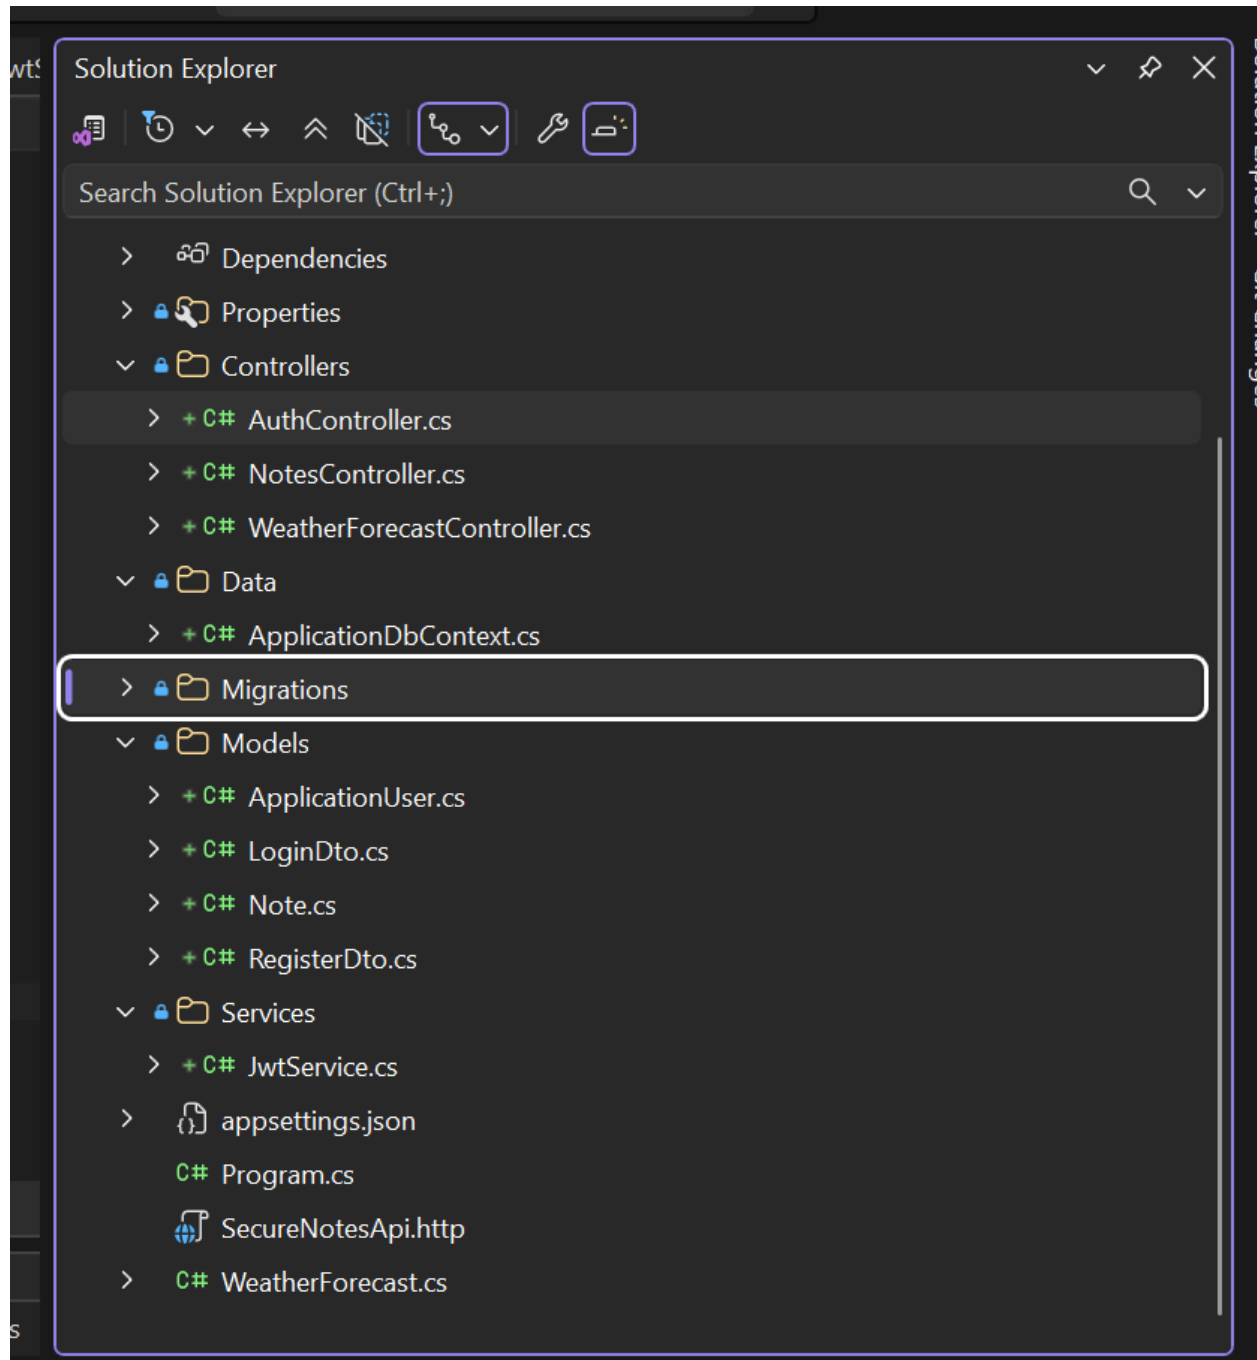


SQL Server Database Created


Here we can See all the tables created and Database with Name :- SecureNotesDb

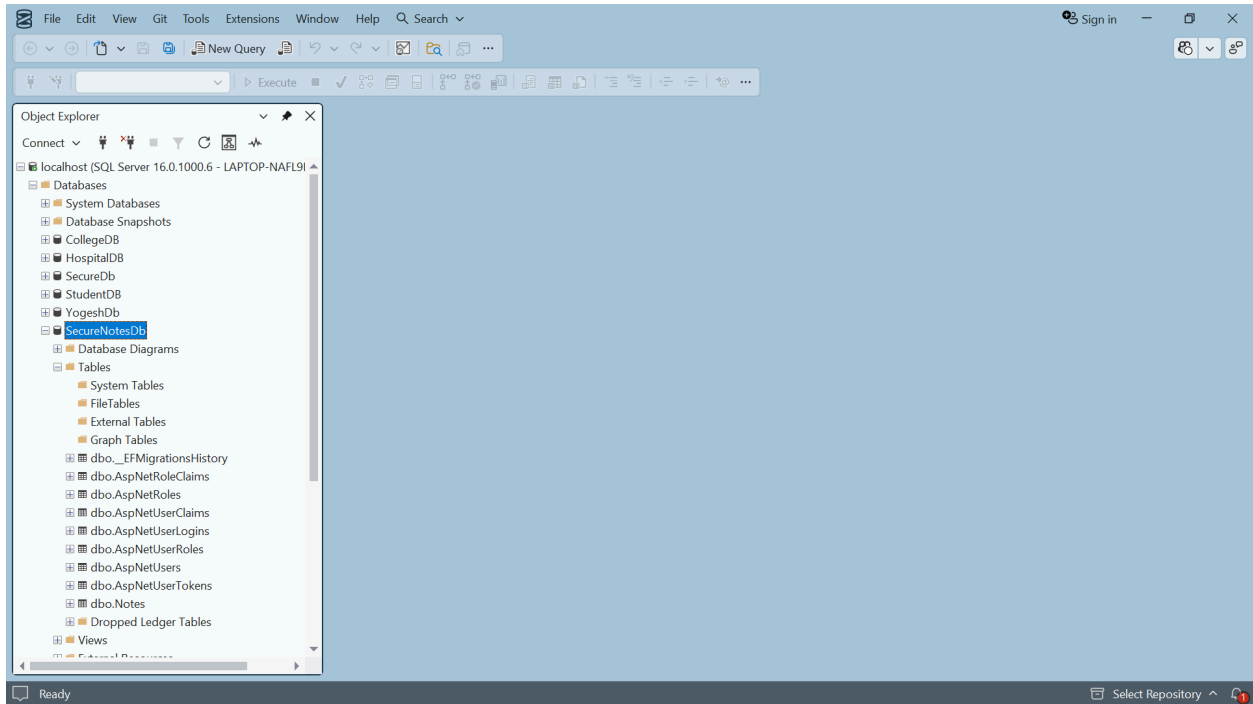


Swagger Home Page

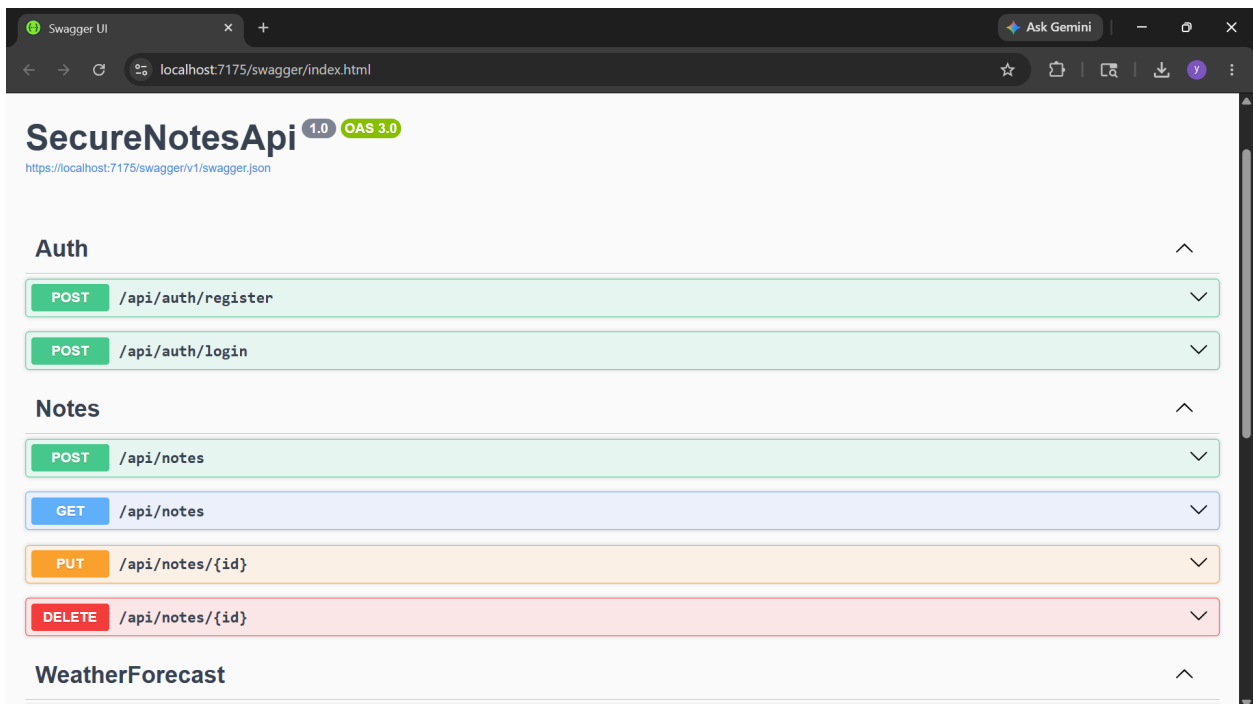

User Registration Request Before:-

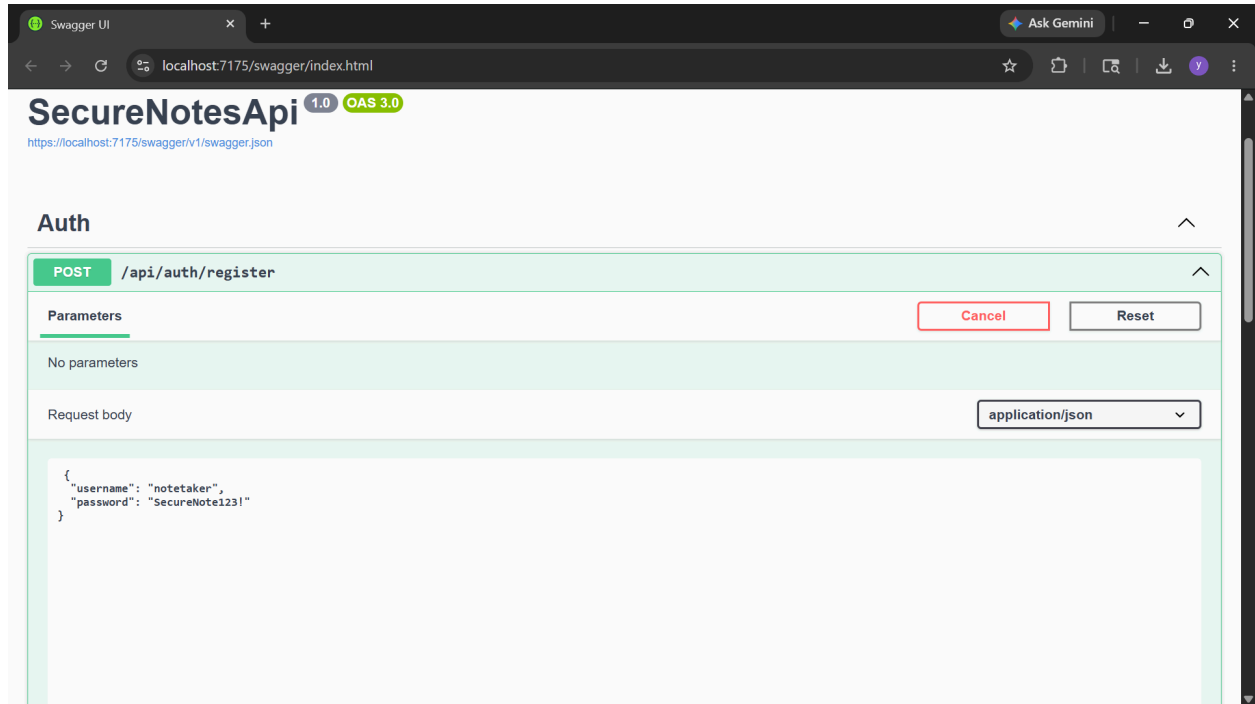


After 

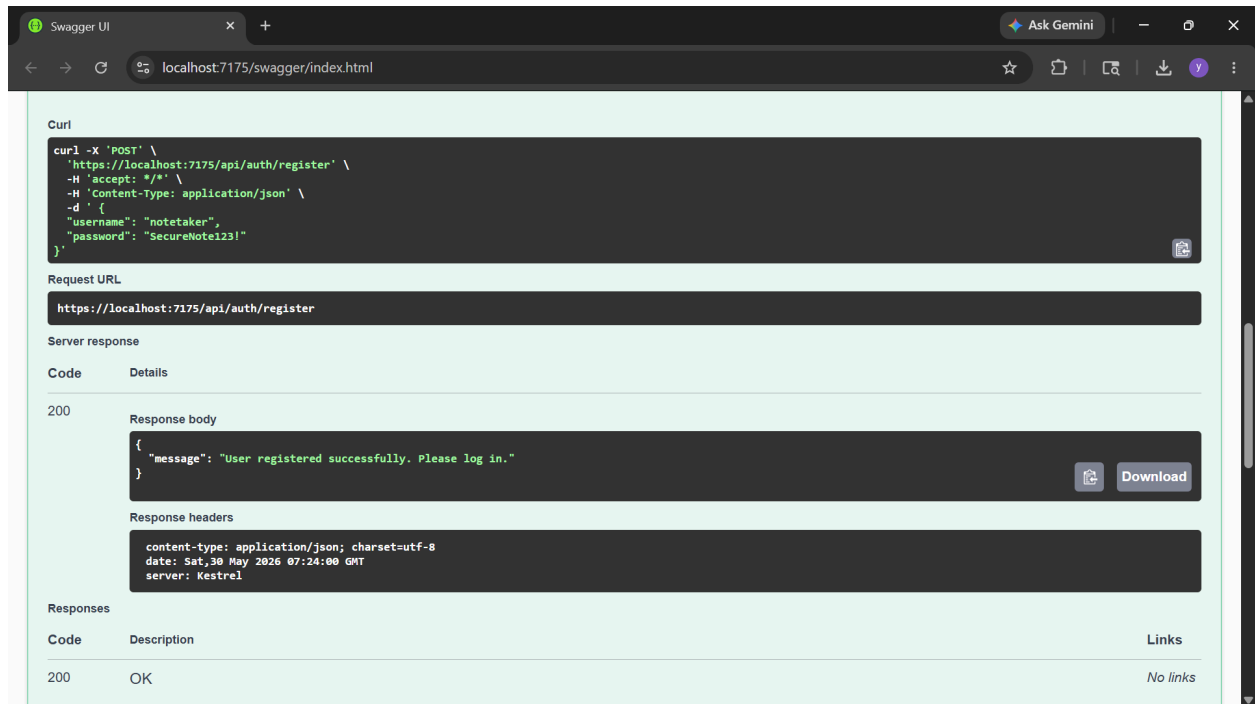


Login Request


Here i have given login request

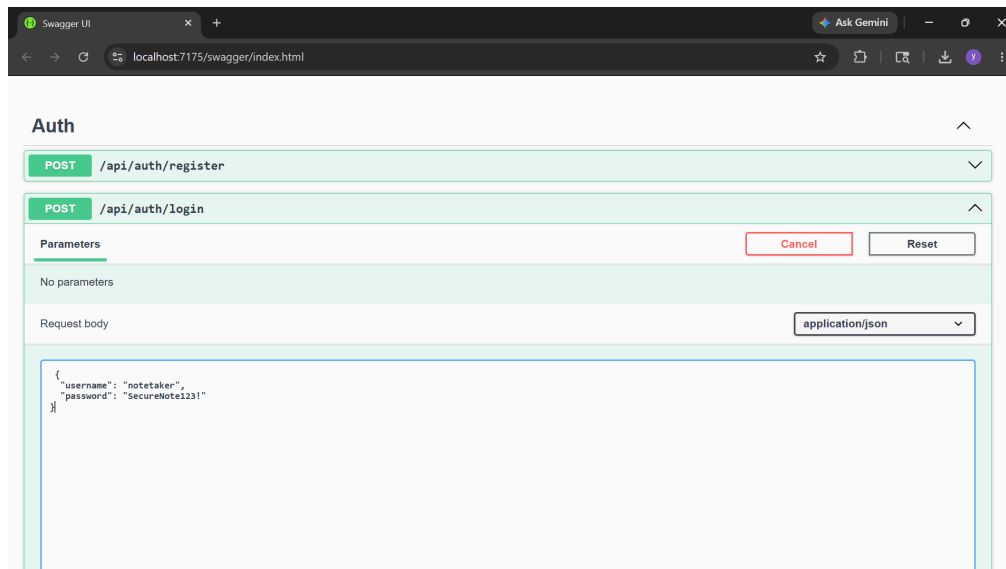


After Login

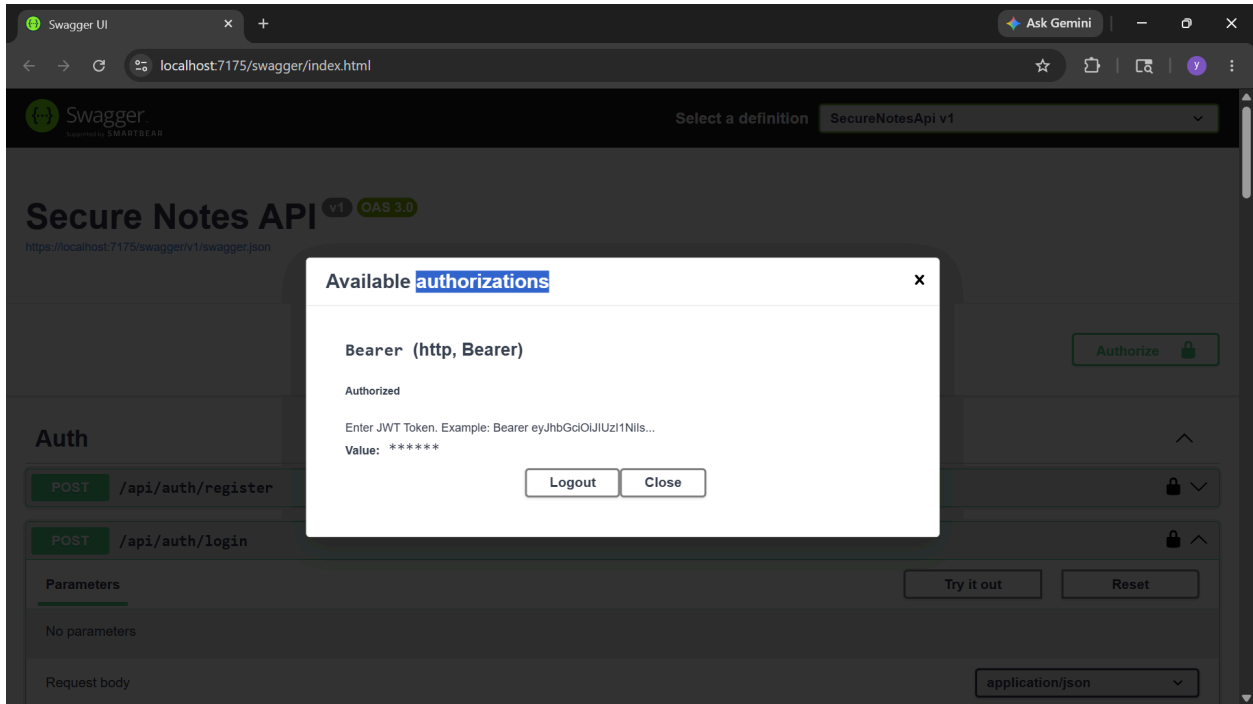


Adding :-

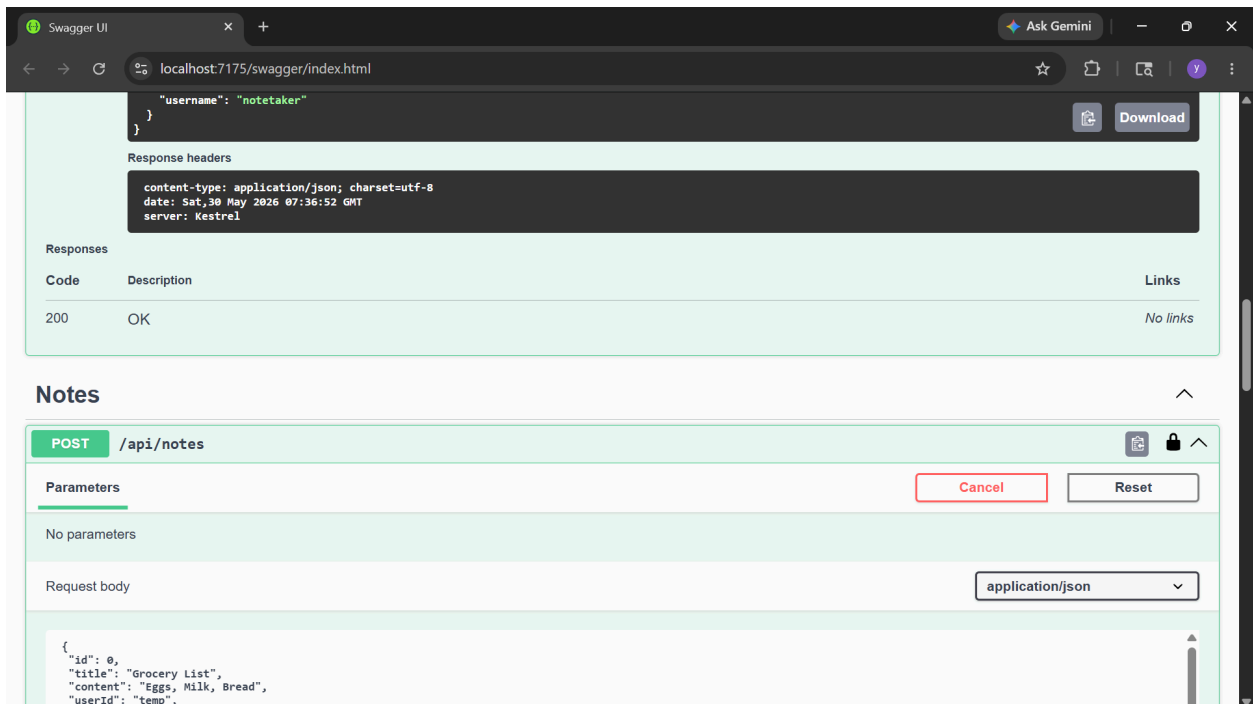

After Adding :-

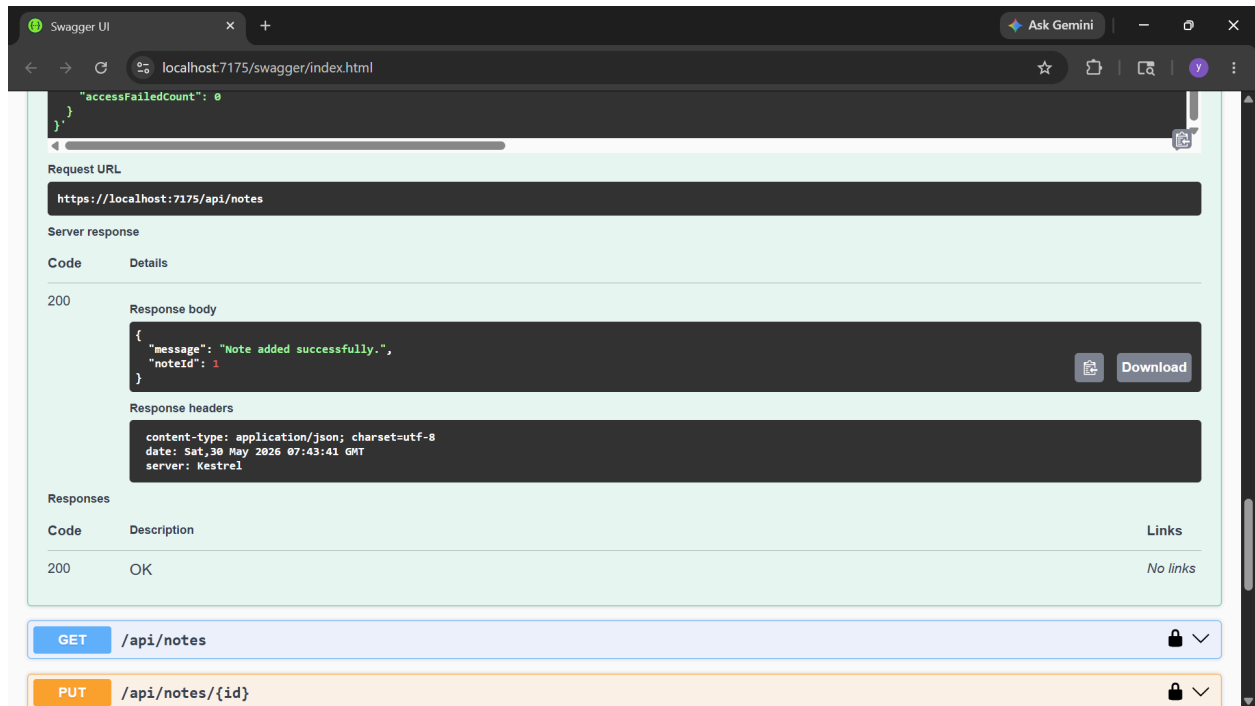

We can see in DataBase Also

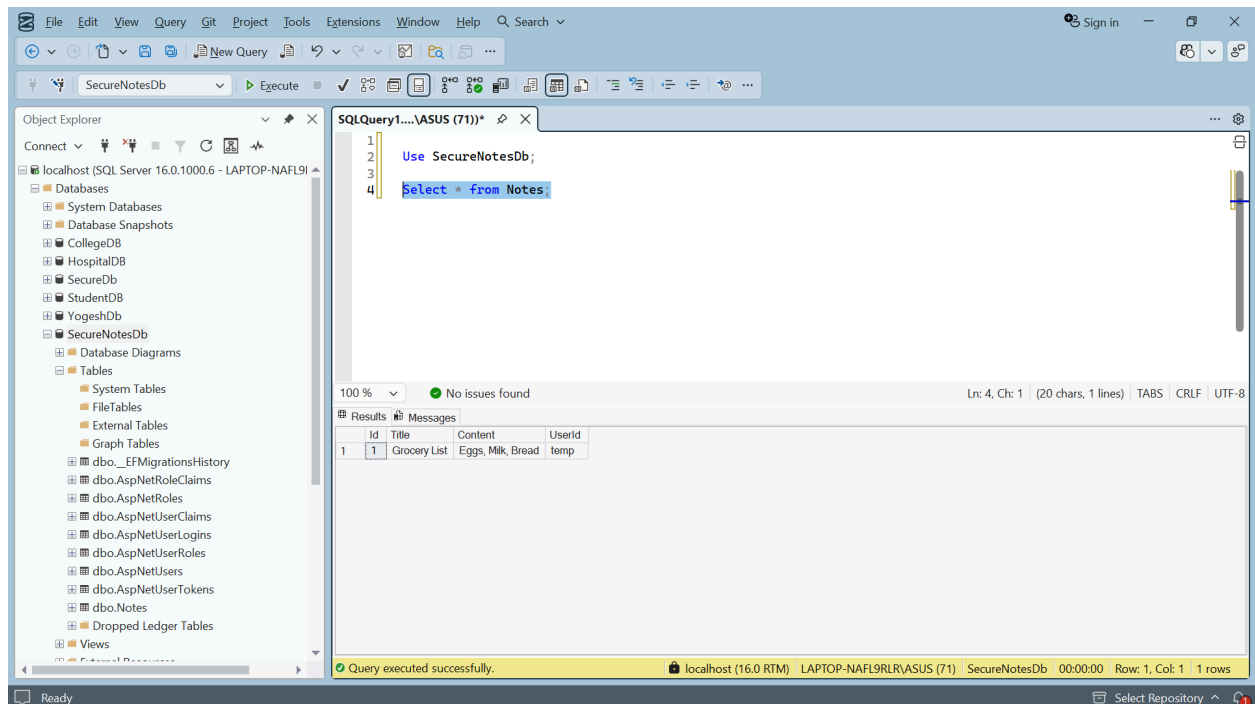

Put Request:-

The image shows a Swagger UI interface in a web browser. The browser's address bar displays `localhost:7175/swagger/index.html`. The Swagger UI shows a PUT request to `https://localhost:7175/api/notes/1`. The server response is a 200 status code with a response body of `Updated` and response headers including `content-type: text/plain; charset=utf-8`, `date: Sat, 30 May 2026 07:59:57 GMT`, and `server: Kestrel`. Below the response details, there is a table of responses with a 200 status code and a description of `OK`. At the bottom, a red button labeled `DELETE` is visible next to the URL `/api/notes/{id}`.

```
Swagger UI
```

localhost:7175/swagger/index.html

```
lockoutEnd": null,
lockoutEnabled": false,
accessFailedCount": 0
}
```

Request URL

https://localhost:7175/api/notes/1

Server response


Code	Details
200	Response body Updated Response headers content-type: text/plain; charset=utf-8 date: Sat, 30 May 2026 07:59:57 GMT server: Kestrel

Responses

Code	Description	Links
200	OK	No links

DELETE /api/notes/{id}

Delete

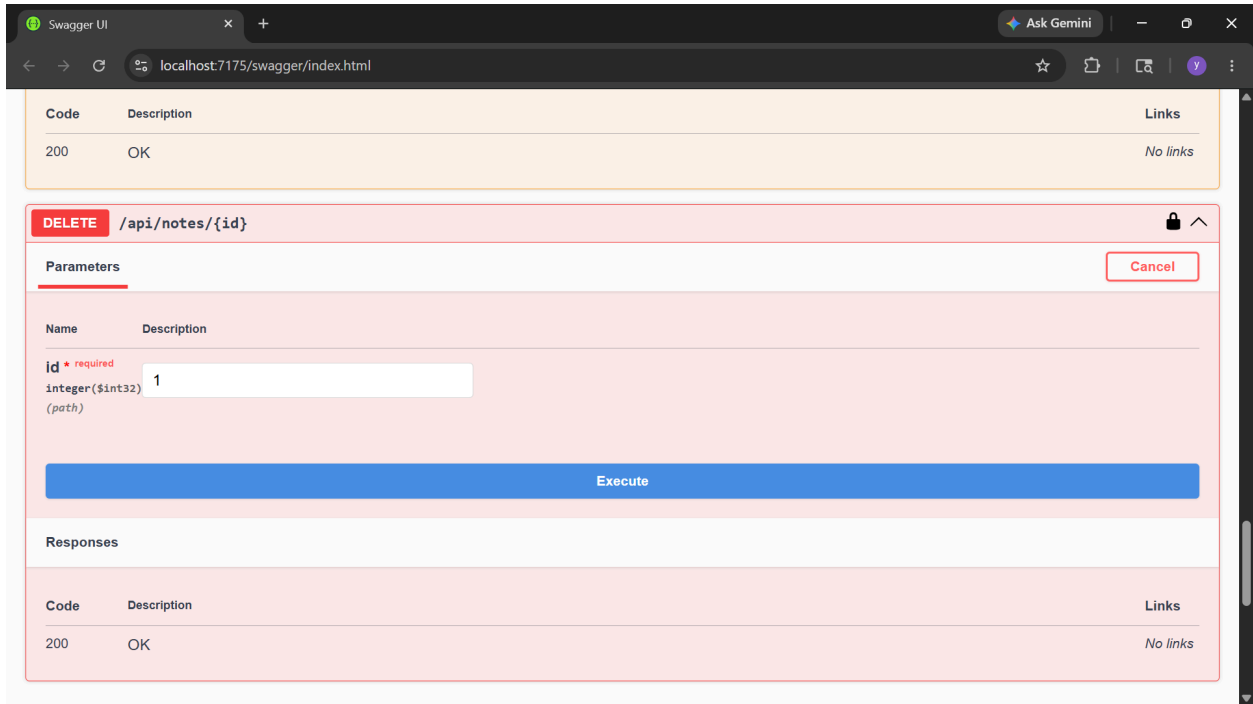

After Delete:-

