
MeshAlive

Help reaches you, even when the network doesn't.

An offline disaster-response network: when cyclones and floods take down mobile towers, SOS messages travel phone to phone, and through rescue boats and teams, to the district control room. The control room's answer travels back the same way.

Concept document · Theme 05 · Surakshit Bharat · Track A · Product / Technology · Stage · Working prototype

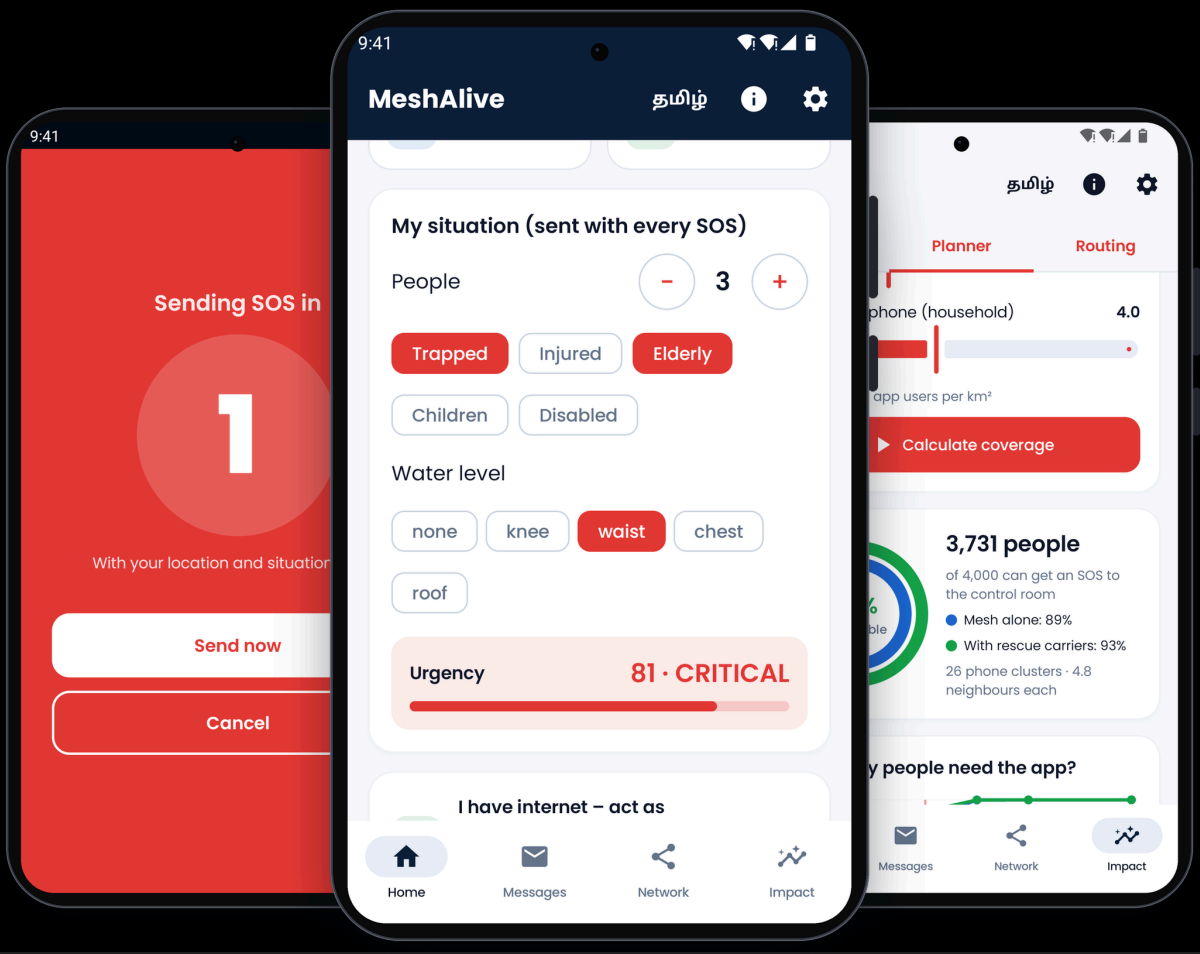

01 · THE PROBLEM

When the towers go down, rescue goes blind

Every cyclone and flood season, coastal and low-lying districts lose mobile coverage for hours or days. Towers lose power, backhaul links are cut, and the network that remains is overloaded. This happened in the 2015 Chennai floods and again during Cyclone Michaung in 2023.

People in danger

Cannot call for help

Trapped families, the elderly, patients and people with disabilities cannot call, text or share their location.

Control rooms

Work blind

No view of who needs help, where they are, how many people are with them, or who is most urgent.

Existing apps

Are only chat tools

They don't reach rescuers, don't prioritise, drain the phones that relay for others, and can't carry a reply back.

Who is affected, and where

People

- Families in flood- and cyclone-prone areas, especially the elderly, children, people with disabilities and patients
- Fishing communities and low-lying coastal settlements
- Rescue teams (NDRF, SDRF, fire and rescue, boat operators, ambulance crews)
- District Emergency Operations Centres and Disaster Management Authorities

Places

- Coastal districts of Tamil Nadu, such as Chennai, Cuddalore, Nagapattinam and Thoothukudi
- India's cyclone-exposed east and west coasts
- River-flood regions: Brahmaputra and Ganga basins, Kerala
- Cities where flooding cuts power to mobile towers

Problem statement. When cyclones and floods take down mobile towers and power, people in danger cannot call for help, and district control rooms cannot see who needs rescue, where they are, or how urgent it is.

02 · THE SOLUTION

A complete rescue loop on the phones people already own

MeshAlive is an Android app plus a browser-based district control room. Together they keep emergency communication working when the mobile network has failed, with no extra hardware.

1 · Ask for help
One-tap SOS with GPS and a situation report, scored 0–100 for urgency. Tamil and English.

2 · Phones relay
Bluetooth and Wi-Fi mesh. Battery-aware routing; the most urgent SOS goes first.

3 · Rescuers carry
Boats and NDRF teams pick up stuck SOS and carry them out of dead zones.

4 · Control room
The first phone with signal uploads everything to a live map, sorted by urgency.


5 · Help returns
Dispatch and evacuation alerts travel back through the mesh to phones with no signal.


For people in danger


- 30-second guided setup: language, household, role
- SOS with a 3-second countdown and Cancel, so there are no false alarms
- Situation report: people, trapped, injured, elderly, children, disabled, water level → urgency score
- “I’m safe” check-ins so rescuers can skip safe households
- “Rescue team on the way” banner, even with no signal

For rescuers and officials

- Rescue-carrier mode for boats, NDRF/SDRF teams and ambulances
- Any phone that regains signal becomes a gateway automatically
- Live district dashboard: map, urgency, people count, route
- Dispatch team / mark rescued / evacuation broadcast, digitally signed
- Impact tools: field-trial evidence recorder and district coverage planner

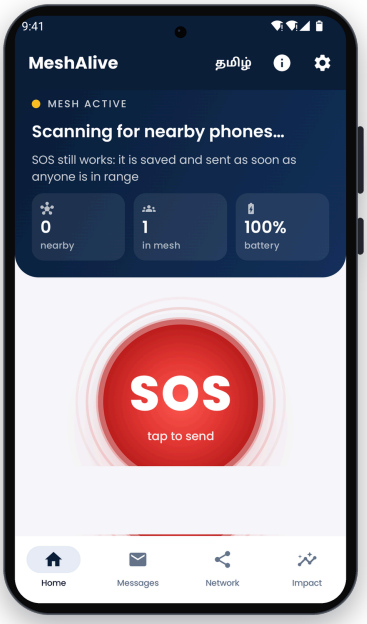

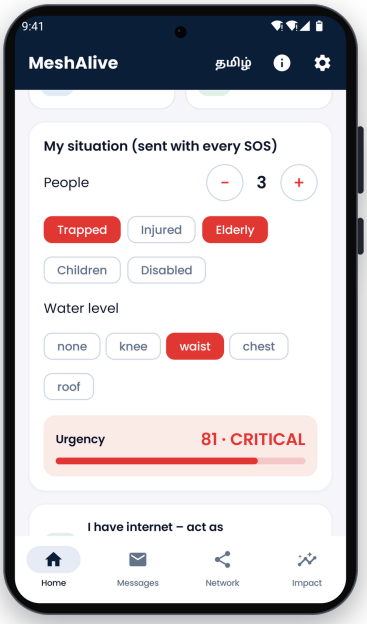


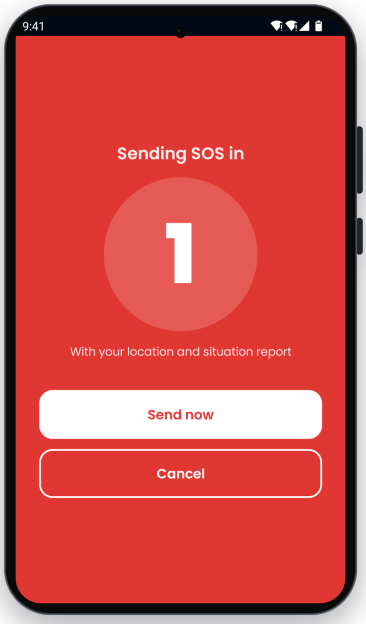

03 · DISTRICT CONTROL ROOM

Every SOS on one live map, and help sent back

The dashboard runs in any browser. Each SOS appears with its urgency, people count, triage details, GPS location and the exact route it took through the mesh.

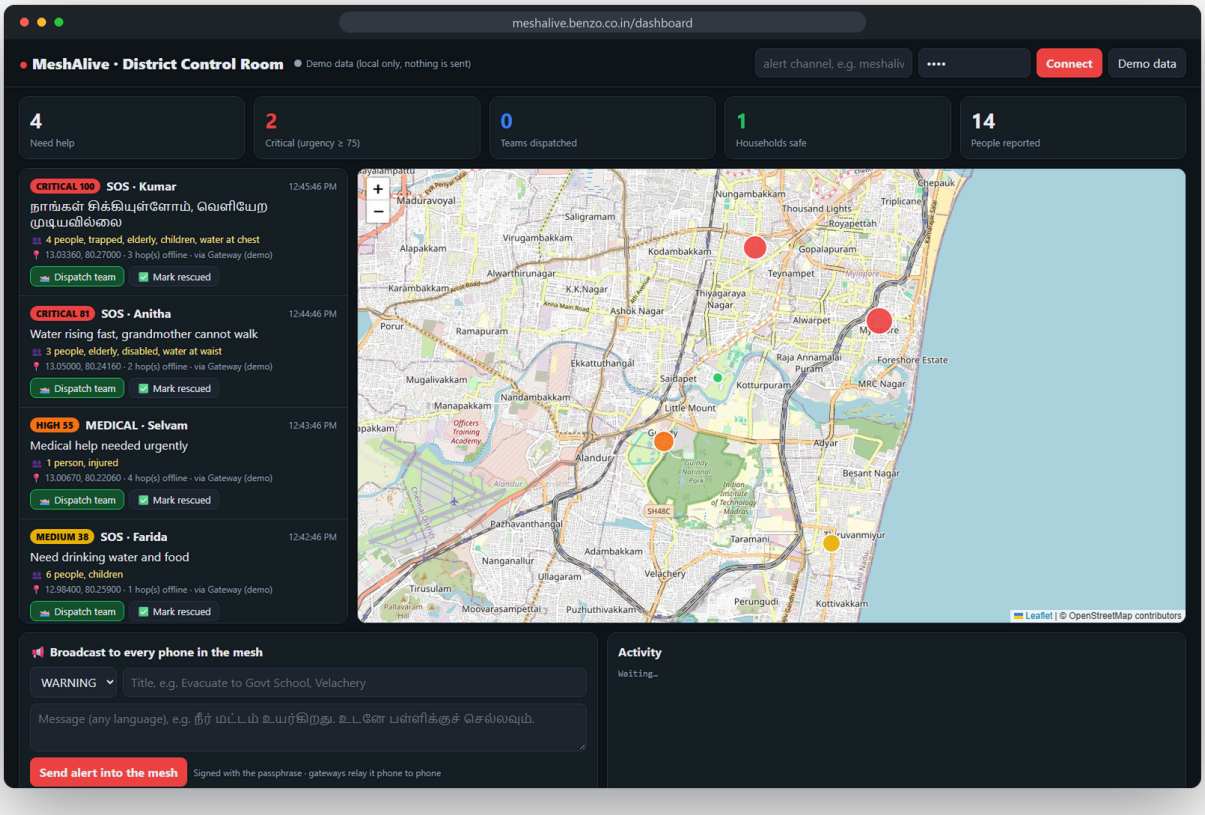

Closing the loop

An operator presses **Dispatch team** and types a note (“Boat 7 on the way, stay on the roof”). A gateway pushes it into the offline mesh, the victim’s phone shows **Rescue team on the way**, and the dashboard shows ✓ **victim’s phone confirmed**.

Evacuation broadcasts

Alerts in any language spread phone to phone to every device in the mesh, and are re-shared with phones that come into range later. Every command is signed with HMAC-SHA256, so fake evacuation orders are rejected.

04 · WHAT IS NEW

A rescue system, not a chat app

	Chat apps (Bridgefy, Briar)	LoRa radios (Meshtastic, goTenna)	MeshAlive
Reaches rescuers	No	No	**Live district dashboard**
Help back to victim	No	No	**Dispatch and evacuation alerts through the mesh**
Prioritises urgent cases	No	No	**Triage score 0–100, most urgent sent first**
No phone in range	Message waits	Message waits	**Rescue carriers physically carry it out**
Battery	Flooding drains phones	Flooding	**Battery-aware routing**
Extra hardware	None	₹2,500+ radio per person	**None**
Fake alerts	–	–	**Signed control-room commands**
Language	English	English	**Tamil and English**

05 · HOW IT WORKS

1 · Discovery	Phones find each other over Bluetooth and Wi-Fi (Google Nearby Connections) and connect automatically, with no towers or internet.
2 · Network map	Every few seconds each phone shares its battery, neighbours and internet status. Every phone rebuilds a live map of the mesh and measures link quality (round-trip time).
3 · Routing	Battery-aware Dijkstra: edge cost = link quality + battery penalty + hop cost. A virtual “super-node” joined to all gateways gives every phone its best next hop in one run, O((V+E) log V).
4 · Priority and reliability	An urgency priority queue, store-and-forward retries, a duplicate filter, a hop limit (TTL) and delivery receipts (ACKs) with hop count.
5 · Carriers and gateways	Custody transfer to rescue carriers; any phone that gets internet uploads what it carries.
6 · Security	AES-GCM encrypted messages; HMAC-SHA256 signed commands from the control room.

06 · EVIDENCE

Built, tested and measured

100%
SOS delivered with battery-aware routing (200-phone simulation)

147×
fewer radio transmissions than flooding (99 vs 14,533)

2×
battery left on the weakest phone vs shortest-hop routing (6.3% vs 3.2%)


Simulation: 200 phones, 20 SOS, same network for all	Flooding	BFS	Battery-aware Dijkstra
Delivery ratio	85%	100%	**100%**
Radio transmissions	14,533	88	**99**
Average hops	5.47	4.40	**4.95**
Weakest phone's battery left	0.0%	3.2%	**6.3%**


What exists today


- Working Android app (APK) with all features listed above
- Working control-room dashboard with signed dispatch and broadcast
- Source code on GitHub; live website with dashboard demo
- 49 automated tests: routing, forwarding, duplicate filtering, TTL, triage, command signatures, coverage planner, evidence reports

Field-trial readiness

- Built-in evidence recorder logs every real delivery: success rate, round-trip time, hops, phones met, relays
- One-tap export of a field-trial report for pilot review
- Demo controls for in-room trials (cut links, simulate low battery)
- Next: structured pilot with 20–50 phones in one ward

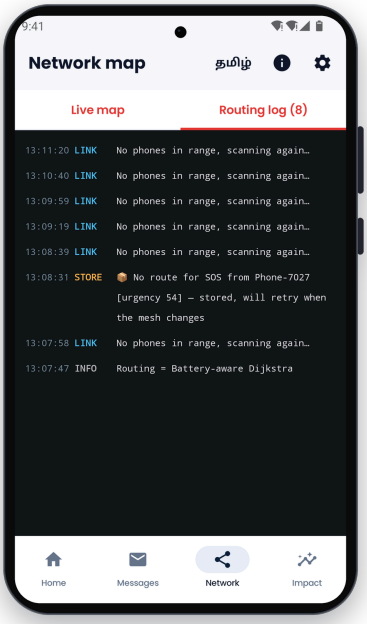

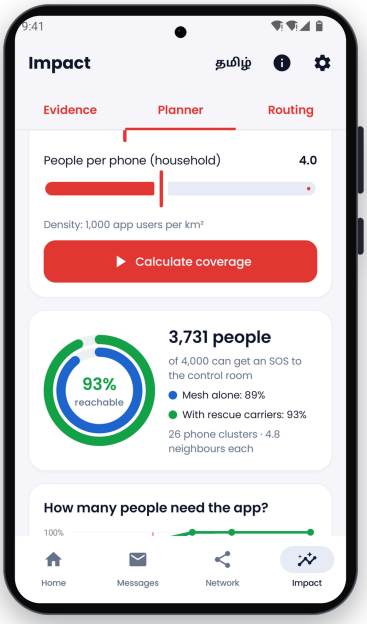

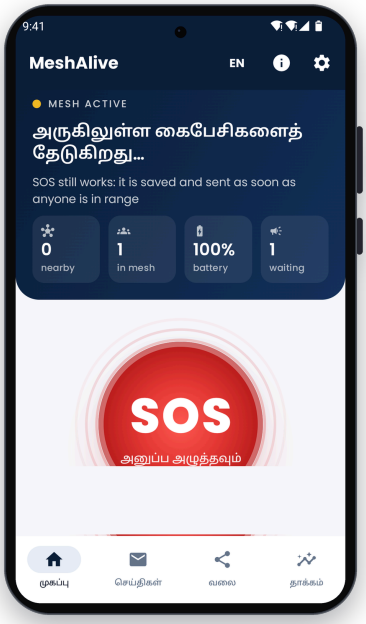

07 · IMPACT, COST AND SCALE

Who benefits, what it costs, how it grows

Beneficiaries and impact

- People trapped or stranded: their SOS reaches rescuers without towers, and they know help is coming
- Vulnerable groups are prioritised automatically by the situation report
- Rescue teams get exact locations, people count and urgency
- Control rooms get a live, prioritised picture and a channel to reach people without signal

District planner (app's own routing engine): in a 1 km² ward with 1,000 app users (about 4 people per phone), around 3,700 of 4,000 people can reach the control room. This is a model, to be validated in the pilot.

Cost and who pays

Citizens	₹0. Free app on their own phone; no SIM, data or account needed for the mesh
Rescue carriers	₹0. Phones that crews already carry
Control room	₹0. Any browser on an existing PC
Running	Small hosting cost for a self-hosted alert server; app maintenance
Rollout	Pre-monsoon awareness and install drives through the DDMA, which pays

Implementation and scaling

Phase 1 · 3 months

Field pilot

One flood-prone ward with the District Disaster Management Authority, local NDRF/SDRF boats as carriers, dashboard in the district EOC. Measure delivery rate and SOS-to-dispatch time.

Phase 2

District rollout

Install drives through schools, colleges, panchayats, urban local bodies and SHGs. The planner's adoption curve sets the install target per ward.

Phase 3

State and national

Distribution through the SDMA; dashboard feeds into state EOCs via the webhook; alerts aligned with the national Common Alerting Protocol; more Indian languages.

08 · ADOPTION AND SUPPORT

Who can take it forward, and what we need

Who could adopt it

- District Disaster Management Authorities and District EOCs (primary users)
- State Disaster Management Authorities, such as TNSDMA, for state-wide rollout
- NDMA, for guidelines and integration with the Common Alerting Protocol based alert system
- NDRF, SDRF, and fire and rescue services, as rescue carriers
- Urban local bodies and panchayats, for ward-level drives
- Ambulance services, fishing cooperatives and boat operators
- NGOs and volunteer networks (Red Cross, civil defence); NSS/NCC units
- State IT departments and telecom operators, for hosting and integration

Support we need

- A pilot partnership with a district administration and its DDMA, with access to the district EOC
- Collaboration with NDRF/SDRF and boat operators to field-test carrier mode
- Mentorship in disaster-management operations and public-sector deployment
- Technical guidance: security review, Common Alerting Protocol integration, self-hosting on government infrastructure
- Pilot funding: alert server, test devices, awareness and training drives
- IP guidance and incubation support

MeshAlive: because when the network fails, help shouldn't.

Website and live dashboard demo: **meshalive.benzo.co.in** · Source code: **github.com/yogeshwardev/MESHALIVE-** · Demo video: [link]

