

Retail Purchase and Tracking System

A Project Report

Submitted in Partial fulfilment

of the Degree of

Bachelors of Computer Applications

**Supervisor's Name –
Dr Deepti Khanna
Mrs Manju Arora**

**Submitted By:-
Student Name- Rishika Bhalla
Roll. No-120918027**



Jagan Nath University

Bahadurgarh (NCR)

(2018-21)

Project Certificate

This is to certify that the project report entitled Retail Purchase and Tracking System submitted to **JaganNath University, Bahadurgarh** in partial fulfilment of the requirement for the award of the degree of **BACHELOR OF COMPUTER APPLICATIONS (BCA)**, is an original work carried out by Mr / Ms. Rishika Bhalla

Enrolment No.:(university) 120918027 under the guidance of Mr./Ms. Manju Arora and Dr Deepti Khanna.

The matter embodied in this project is a genuine work done by the student and has not been submitted whether to this University or to any other University / Institute for the fulfilment of the requirement of any course of study.

Name of the student : Rishika Bhalla Name of the Guide: Dr Deepti Khanna, Mrs Manju Arora

Signature of the Student

Signature of the Guide

Enrolment No.: 120918027

Date : 3.5.21

Acknowledgement

I would like to take this opportunity to express my gratitude towards all the people who have in various ways, helped me in the successful completion of my project.

I must convey my gratitude to Head of Department Mr. Mohit Mathur, my guide Dr. Deepti Khanna and Mrs Manju Arora and our coordinator Ms. Manisha Tripathi for giving me the constant source of inspiration and help in preparing the project, personally for giving me the constant source of inspiration and help in preparing the project, personally correcting my work and providing encouragement throughout the project.

I also thank all my friends and other faculty members for steering me through the tough as well as easy phase of the project in a result-oriented manner with concern attention.

Thanking You,
Rishika Bhalla

INDEX

SERIAL NO.	TOPIC	PAGE NO.
1	Introduction	1-4
2	Objective	5
3	Tools/Environment	6
4	Analysis Document	7-12
5	Design Document	13-17
6	Program Code	18-80
7	Testing & Validations	81-93
8	Input & Output Series	94-109
9	Limitations of the project	110
10	Future Applications of the project	111
11	Bibliography	112

INTRODUCTION

This project Retail Purchase and Tracking System made in php. It is a website which automates the complete operations of the retailer and the customers. It allows the customer to buy the product without going to the shop and retailer to sell the products online.

Retailer manages the records of the customers like which customer has logged in and registered, which product has been purchased by the customers, the quantity purchased etc. It enables the retailer to sell products online and customers to buy the products online and track the location of the products purchased online. The aim of the project is to reduce the manual effort and save the time of retailer and customers.

1.1Purpose

The main objective of this project is to automate the complete operations of providing all kinds of products at reasonable prices to consumers by retailers and to maintain this project user friendly. It fulfils the requirements of customers and manages all the records like which customer has logged in or registered, which product has ordered by customers etc in retailer's database and customer can track the location of their product. This project reduce the manual effort and saves the time of retailer and customers. This project supports digital storing and organizing of data without any redundancy.

1.2Scope

This project allows the customer's to maintain their cart for add, update, remove and view the product over the internet and track their product.

1.3Overview

This system provides an easy to solution customer's to buy the product without go to the shop and also retailer to sell their products.

2.Overall Description

It provides all kinds of products at reasonable prices to consumers by retailers and to maintain this project user friendly. It fulfils the requirements of customers and manages all the records like which customer has logged in or registered, which product has ordered by customers etc in retailer's database and customer can track the location of their product.

2.1Product Perspective

It includes:-

- **Customer Details:**

It includes the registration of new cutomers and login for existing customers.

Registration includes id, name, email, address, contact and password etc and login includes id, name and password etc.

- **Product Details:**

Customers can view the different kinds of products provided by the retail, can order the product by adding, updating, and viewing the products in shopping cart and can unorder them by removing from the shopping cart.

- **Order Details:**

Customer can track the ordered products.

2.2Product Function

It includes:-

- **Retailer Details:**

It includes the registration of new retailer and login for existing retailer.

Registration includes name, address, and password etc and login includes name and Password.

- **Category Management**

Retailer add, update, remove and view the kind of products that he is selling to the customers.

2.3 User Characteristics

The user who is using the system for first time have to register to get registered in the system and the existing user can login through name and password.

The user should be able to perform following functions:-

- User can see the products provided by the retailer.
- User can add the products in the cart provided by the retailer.
- User can update the products in the cart provided by the retailer.
- User can delete the products in the cart provided by the retailer.
- User can view the products which are added in the cart provided by the retailer.
- User can track the ordered products provided by the retailer.

3. Specific Requirements:

3.1 User Interfaces:

- Client side scripting: HTML, CSS
- Server side scripting: PHP
- Backend Software (Database): MYSQL

3.2 Communication Interfaces:

This project supports all type of web browsers.

Objectives

The main objective of this project is to automate the complete operations of providing the products in retail and to maintain this project user friendly.

Its objective is to reduce manual efforts of customers for purchasing products and retailers to sell the products. It fulfils the requirements of customers by proving all kinds of products and manages all the records of the customers like which customer has ordered which product and customer can track the location of their products..

This project supports digital storing and organizing of data without any redundancy.

Tools/Environment

Hardware Requirements:

Number	Description
1	PC with 20GB Hard Disk
2	PC with 256MB RAM
3	PC with Pentium1 and Above

Software Requirements:

Number	Description	Type
1	Operating System	Windows XP / Windows 10
2	Language	PHP
3	Client side Script	HTML,CSS
4	Server	XAMPP 3.2.4
5	Database	MySQL
6	IDE	Notepad
7	Designing Tools	Visual Studio
8	Browser	Google Chrome/Internet Explorer, Mozilla etc.

Analysis Document

A) E-R Diagram:


It stands for Entity Relationship Diagram, also known as ERD is a diagram that displays the relationship of entity sets stored in a database. In other words, ER diagrams help to explain the logical structure of databases. ER diagrams are created based on three basic concepts:

- **Entities:** Which specify distinct real-world items in an application.
- **Properties/Attributes:** Which specify properties of an entity and relationships.
- **Relationships:** Which connect entities and represent meaningful dependencies between them.

B) Normalisation:


It is a database design technique that reduces data redundancy and eliminates undesirable characteristics like Insertion, Update and Deletion Anomalies. Normalization rules divides larger tables into smaller tables and links them using relationships. The purpose of Normalization in SQL is to eliminate redundant (repetitive) data and ensure data is stored logically.

FLOWCHART

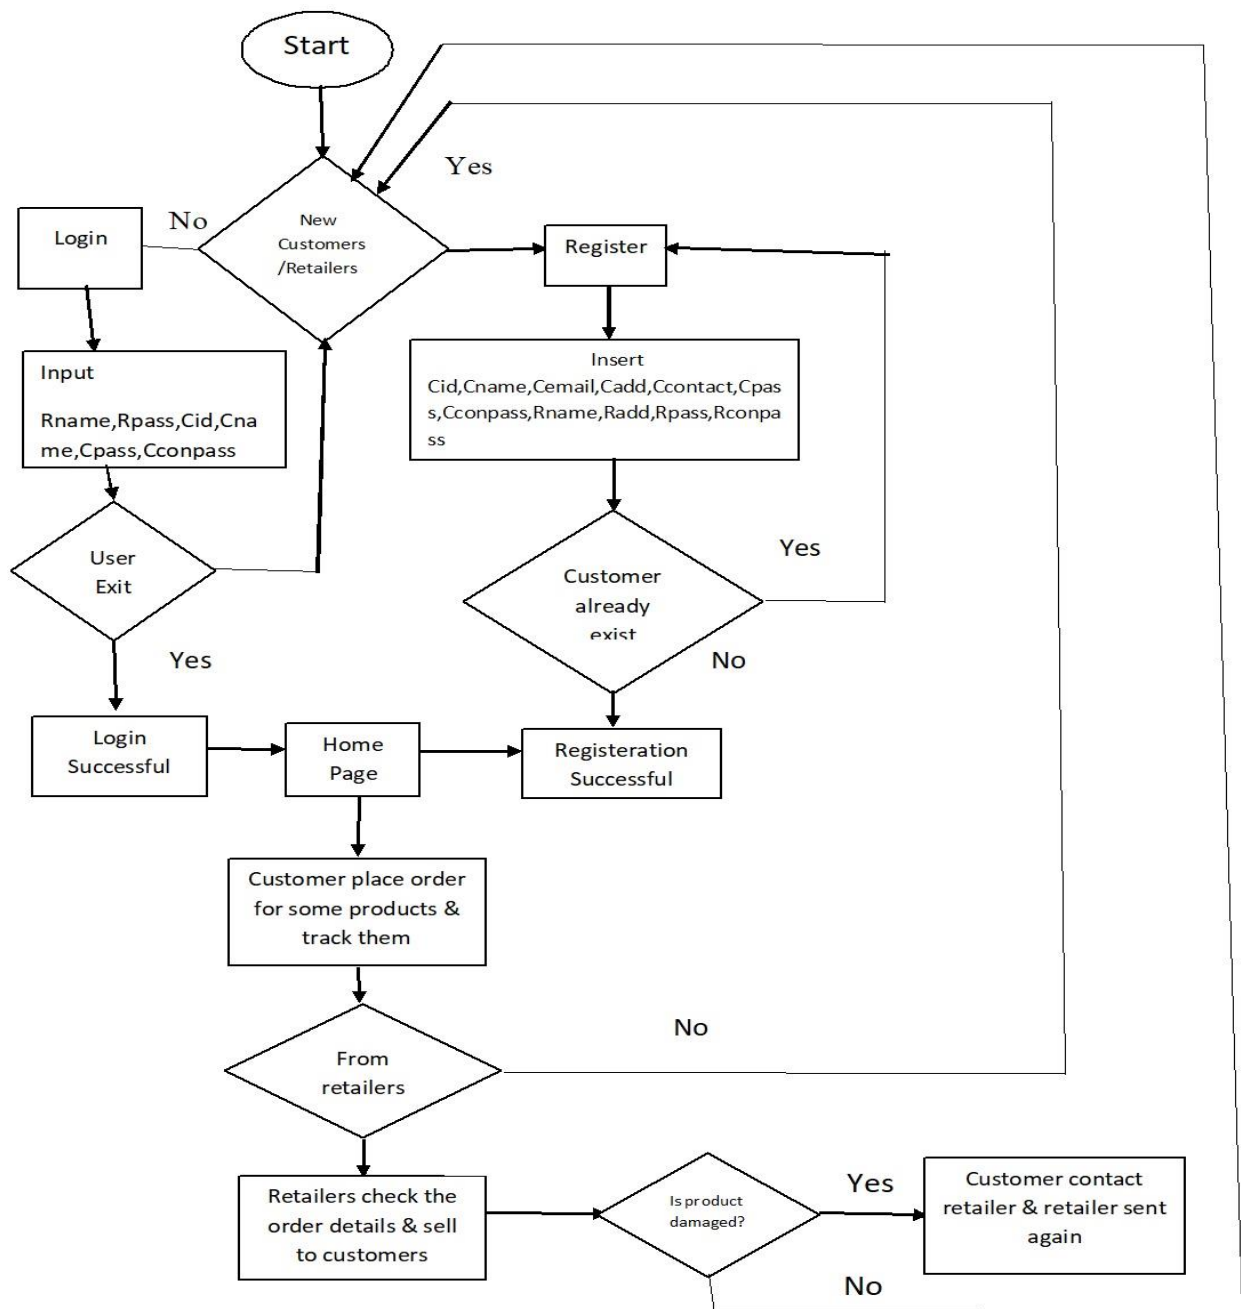


DFD


0 LEVEL DFD

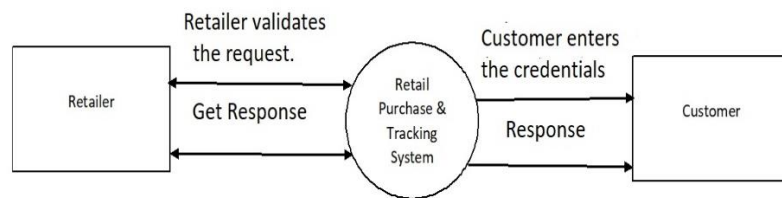


1 LEVEL DFD

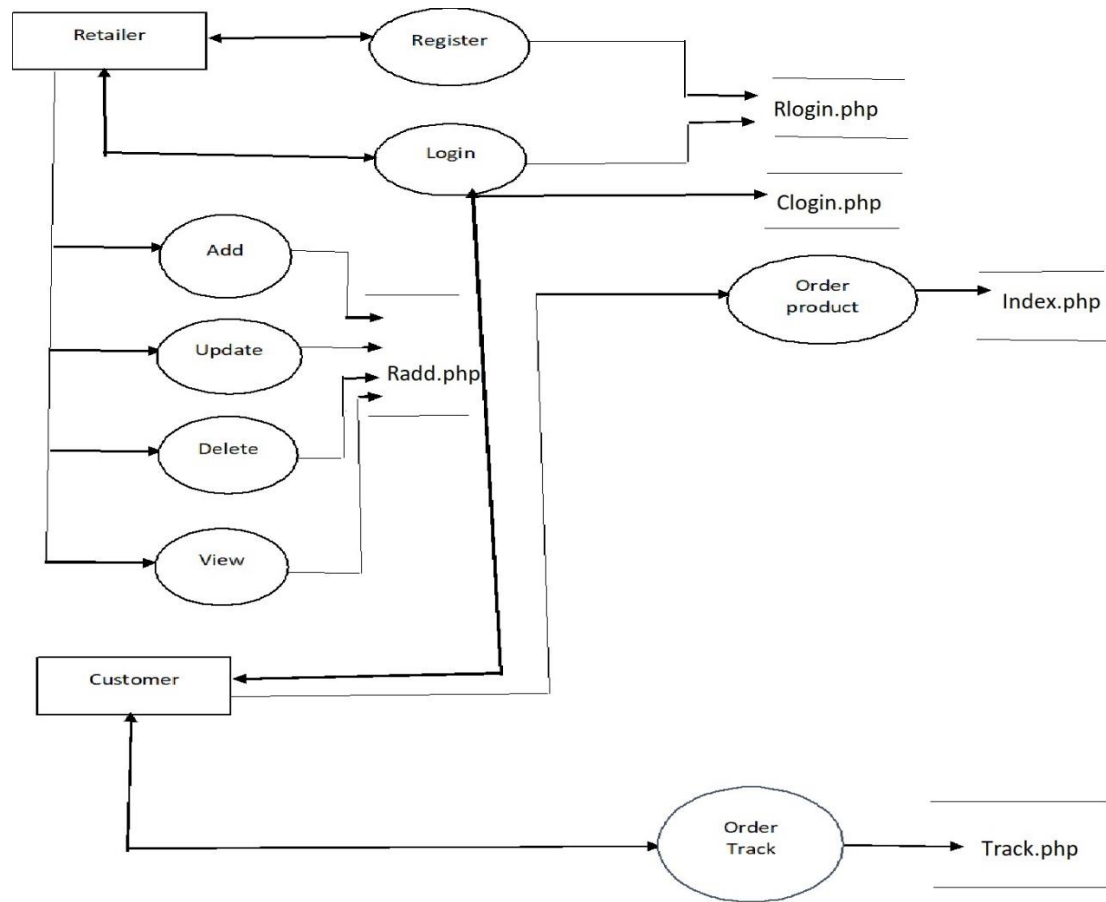

ER DIAGRAM

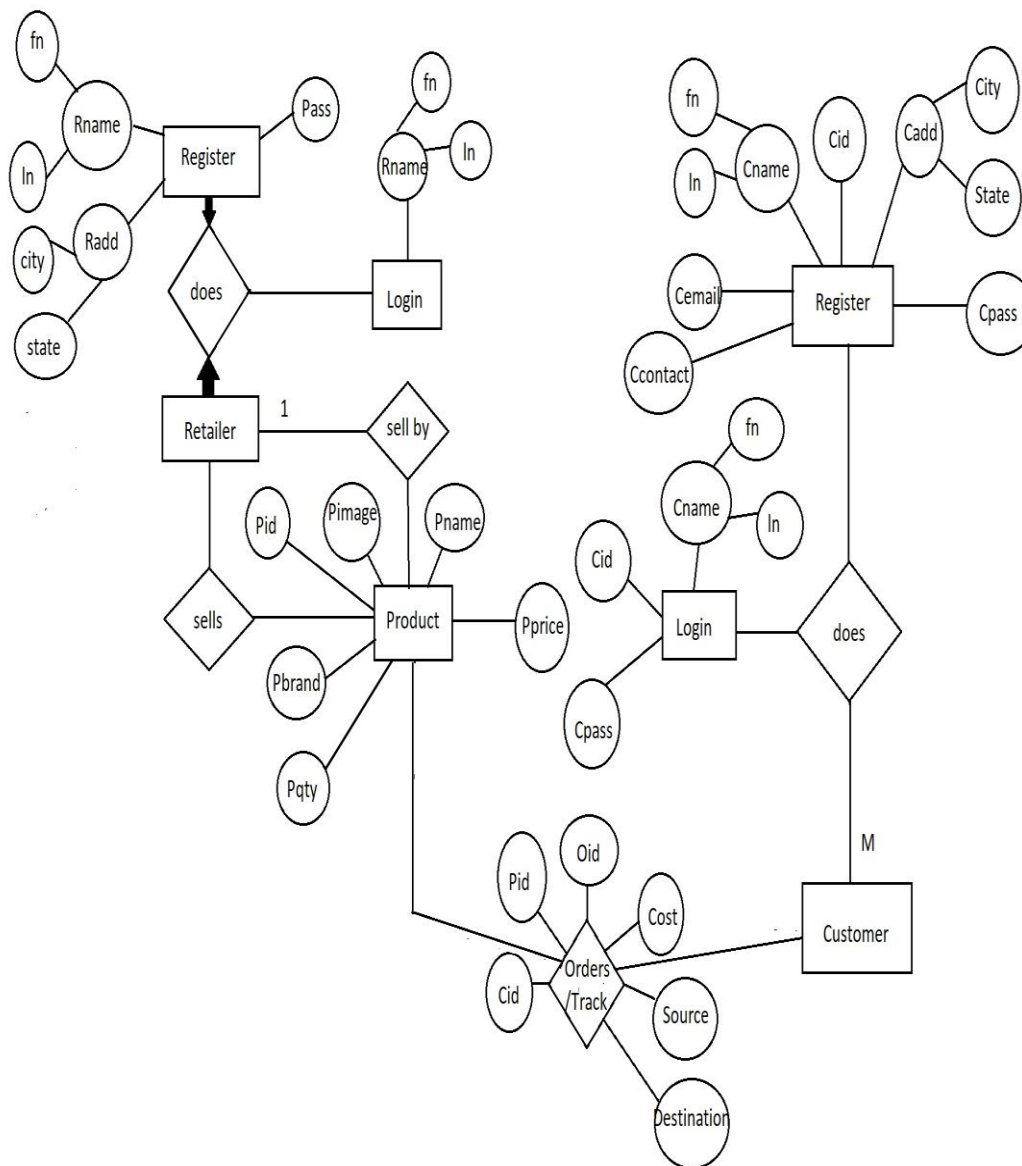

Use Case Diagram

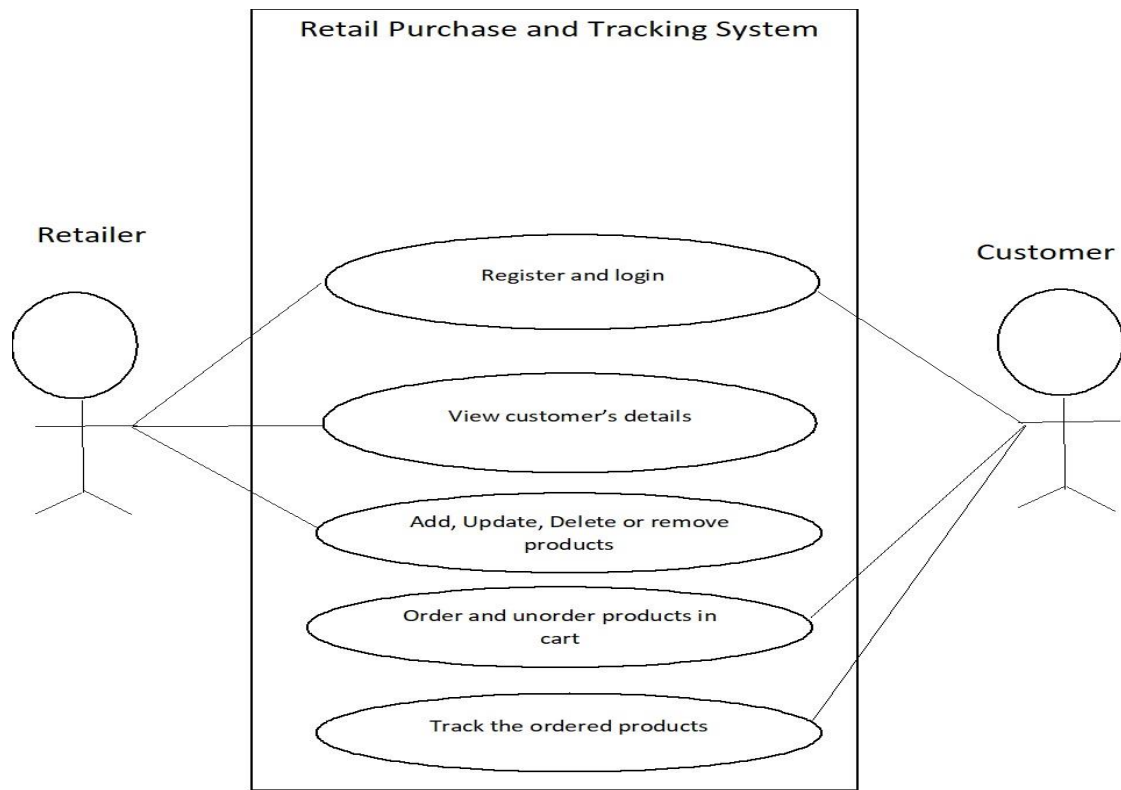

Design Document

Modularisation Details

When the system is broken down into small modules i.e. functions this process is referred to as modularization. In this project there are various modules which perform different functions. The modules are as follows:-

❖ Register and login:

It includes registration details for new retailer and new customers. Registration for retailer include name, address and password etc and registration details for new customers include id, name, email, address, contact and password etc and it also includes login for existing retailer and existing customer. Login for existing retailer include name and password and login for existing customers include id, and password.

❖ Product management:

Retailer can add, update, delete and view all type of products provided by him..

❖ Cart details:

Customer can add, update, and view the products in shopping cart for order and remove the products for unordered.

❖ Track:

Customer can track the details of the ordered product.

❖ Checkout:

User can checkout from the cart.

User Interface:

The user interface is made in such a way that users can use it easily. The user interface is design with html in airline reservation system.

Data Dictionary

cregister

Column	Type	Null	Default	Links to	Comments	Media (MIME) type
Cid (<i>Primary</i>)	varchar(255)	No				
Cname	varchar(255)	No				
Cemail	varchar(255)	No				
Cadd	varchar(255)	No				
Ccontact	varchar(255)	No				
Cpass	varchar(255)	No				

Indexes

Keyname	Type	Unique	Packed	Column	Cardinality	Collation	Null	Comment
PRIMARY	BTREE	Yes	No	Cid	3	A	No	

orders

Column	Type	Null	Default	Links to	Comments	Media (MIME) type
Oid (<i>Primary</i>)	int(10)	No				
Pid	int(10)	No		product -> pid		
cid	varchar(20)	No		cregister -> Cid		
Cost	int(8)	No				
Source	varchar(255)	No				
Destination	varchar(255)	No				

Indexes

Keyname	Type	Unique	Packed	Column	Cardinality	Collation	Null	Comment
PRIMARY	BTREE	Yes	No	Oid	2	A	No	
Pid	BTREE	No	No	pid	2	A	No	
cid	BTREE	No	No	cid	2	A	No	

product

Column	Type	Null	Default	Links to	Comments	Media (MIME) type
pid (<i>Primary</i>)	int(50)	No				
Pname	varchar(255)	No				
Pbrand	varchar(255)	No				
Pqty	int(50)	No				
Pprice	varchar(500)	No				
Pimage	text	No				

Indexes

Keyname	Type	Unique	Packed	Column	Cardinality	Collation	Null	Comment
PRIMARY	BTREE	Yes	No	pid	12	A	No	

rpadd

Column	Type	Null	Default	Links to	Comments	Media (MIME) type
Rpid (<i>Primary</i>)	varchar(255)	No				
Rpname	varchar(255)	No				
Rpbrand	varchar(255)	No				
Rpqty	varchar(255)	No				
Rpprice	varchar(255)	No				

Indexes

Keyname	Type	Unique	Packed	Column	Cardinality	Collation	Null	Comment
PRIMARY	BTREE	Yes	No	Rpid	4	A	No	

rregister

Column	Type	Null	Default	Links to	Comments	Media (MIME) type
rname (<i>Primary</i>)	varchar(255)	No				
Radd	varchar(255)	No				
Rpass	varchar(255)	No				
rconpass	varchar(255)	No				

Indexes

Keyname	Type	Unique	Packed	Column	Cardinality	Collation	Null	Comment
PRIMARY	BTREE	Yes	No	rname	8	A	No	

Integrity Constraints

- Integrity constraints are a set of rules. It is used to maintain the quality of information.
- Integrity constraints ensure that the data inserted, updated, and other processes have to be performed in such a way that data integrity is not affected.
- Thus, integrity constraint is used to guard against accidental damage to the database.

Types of Integrity Constraints:

There are four types of integrity constraints:-

- ❖ Domain Constraint.
- ❖ Entity Integrity Constraint.
- ❖ Referential Integrity Constraint.
- ❖ Key Constraint.

1. Domain Constraint:

- Domain constraints can be defined as the definition of a valid set of values for an attribute.
- The data type of domain includes string, character, integer, time, date, currency, etc. The value of the attribute must be available in the corresponding domain.
- In my project I have followed this constraint with respect to every attribute.
- All the attributes are assigned with the correct data type.

2. Entity Integrity Constraint:

- The entity integrity constraint states that primary key value can't be null. 19
- This is because the primary key value is used to identify individual rows in relation and if the primary key has a null value, then we can't identify those rows.
- A table can contain a null value other than the primary key field.

This integrity is not followed in this project.

3. Referential Integrity Constraints:

- A referential integrity constraint is also known as foreign key constraint. A foreign key is a key whose values are derived from the Primary key of another table.
- The table from which the values are derived is known as Master or Referenced Table and the Table in which values are inserted accordingly is known as Child or Referencing Table.
- This integrity is followed in this project.

4. Key Constraints:

- Keys are the entity set that is used to identify an entity with in its entity set uniquely.
- An entity set can have multiple keys, but out of which one key will be the primary key. A primary key can contain a unique and null value in the relational table.

Program Code

❖ Home.html

```
<!doctype html>
<html lang="en">

<head>
  <!-- Required meta tags -->
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">

  <!-- Bootstrap CSS -->
  <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/css/bootstrap.min.css"
  integrity="sha384-
TX8t27EcRE3e/ihU7zmQxVncDAy5uIKz4rEkgIXeMed4M0jlfIDPvg6uqKI2xXr2"
  crossorigin="anonymous">

  <title>Furniture Store</title>
  <style>
    #container {
      width: 100%;
      height: 100%;
      overflow: hidden;
    }

    #header {
      width: 2500px;
      height: 50px;
      background-color: purple;
      margin: 0px;
    }

    #header h1 {
      color: white;
      font: size 5;
    }

    #menu{
background:hotpink;
min-height:60px;
width:100%;}
```

```

#menu ul{
margin:0;
padding:0;
list-style:none;
}
#menu ul li{
float:left;
position:relative;
width:25%;
}
#menu ul li a{
color:blue;
display:block;
padding:15px 95px;
text-decoration:none;
}
#menu ul li a:hover{
background:purple;
color:white;
}
#menu ul li ul{
position:absolute;
z-index: 99999;
left:9999px;
background:hotpink;
}
#menu ul li:hover ul{
left:0;
display:block;
}
#menu ul li ul li{
float:none;
width:250px;
}
#menu ul li ul li a{
background:hotpink;
color:blue;
padding:15px 85px;
}
#content {
background-color:cadetblue;
padding-left: 0px;
height: 812px;}

```

```

#content pre {
  color: darkblue;
  padding-top: 10px;
  font-size: large;
}
.card{
  padding-left: 5px;
}
#footer {
  background-color: purple;
  height: 45px;
  margin-top: 0px;
}

#footer p {
  padding-top: 15px;
  color: white;
}
</style>
</head>

<body>
<div id="container">
  <div id="header">
    <h1 align="center">Retail</h1>
  </div>
  <div id="menu">
    <ul>
      <li><a href="Home.html"><h5>Home</h5></a></li>
      <li><a href="Rlogin.php"><h5>Reatiller</h5></a></li>
      <li><a href="Clogin.php"><h5>Customer</h5></a></li>
      <li><a href="Contact.html"><h5>Contact</h5></a></li>
    </ul>
  </div>
  <div id="content">
    <div id="carouselExampleSlidesOnly" class="carousel slide" data-
ride="carousel">
      <div class="carousel-inner">
        <div class="carousel-item active">
          
        </div>

```



```

<div class="carousel-item">
    
</div>
<div class="carousel-item">
    
</div>
<div class="carousel-item">
    
</div>
</div>
<br>
<pre><h4><b> Retail is a website launched in 25th october,2019 with an aim of
providing best quality products to consumers.Our aim is to provide best quality
products at reasonable products at your doorstep.
We provide all kinds of product like clothes,accessories,clothes and electronic
appliances.We gained customer's trust by focusing on the quality of the products.
<br>
Services:-
<ul>
<li>We provide all kinds of products at your doorstep.</li>
<li>We provide 24*7 support to customers through email and contact number.</li>
</ul>
</div>

</b> </h4></pre>
</div>
<div id="footer">
    <p align="center">&#169;Copyrights Reserved</a></p>
</div>
<!-- Optional JavaScript; choose one of the two! -->

<!-- Option 1: jQuery and Bootstrap Bundle (includes Popper) -->
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js"
integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j"
crossorigin="anonymous"></script>

```

```

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.bundle.min.js"
  integrity="sha384-
ho+j7jyWK8fNQe+A12Hb8AhRq26LrZ/JpcUGGOn+Y7RsweNrtN/tE3MoK7ZeZD
yx"
  crossorigin="anonymous"></script>

<!-- Option 2: jQuery, Popper.js, and Bootstrap JS
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js" integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j" crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"
integrity="sha384-
9/reFTGAW83EW2RDu2S0VKA1Zap3H66lZ81PoYlFhbGU+6BZp6G7niu735Sk7l
N" crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.min.js"
integrity="sha384-
w1Q4orYjBQndcko6MimVbzY0tgp4pWB4lZ7lr30WKz0vr/aWKhXdBNmNb5D92v
7s" crossorigin="anonymous"></script>
-->
</div>
</body>
</html>

```

❖ **Rlogin.php**

```
<?php
// include_once 'db.php';
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "retailer";
$conn = mysqli_connect($servername, $username, $password, $dbname);

if ($_POST) {

    $rname = $_POST["rname"];
    $radd = $_POST["radd"];
    $rpassword = $_POST["rpass"];
    $rcpassword = $_POST["rcpassword"];

    $sql = "INSERT into rregister(rname, radd, rpass,rcpassword) VALUES('" . $rname.
    '", '" . $radd . "', '" . $rpassword . "', '" . $rcpassword . "')";
    if (mysqli_query($conn, $sql)) {
        echo '<script>alert("New record created successfully !")</script>';
    }
    else{ echo "Error: " . $sql . " " . mysqli_error($conn);}
    mysqli_close($conn);}
?>

<!doctype html>
<html lang="en">
<head>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-
    fit=no">
    <!-- Bootstrap CSS -->
    <link rel="stylesheet"
    href="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/css/bootstrap.min.css"
    integrity="sha384-
    TX8t27EcRE3e/ihU7zmQxVncDAy5uIKz4rEkgIXeMed4M0jlfIDPvg6uqKI2xXr2"
    crossorigin="anonymous">
<title>Retail</title>
```

```

<style>
#container {
  width: 100%;
  height: 100%;
  overflow: hidden;
}

#header {
  width: 2050px;
  height: 50px;
  background-color: purple;
  margin: 0px;
}

#header h1 {
  color: white;
  font: size 5;
}

#menu{
background:hotpink;
min-height:60px;
width:100%;
}
#menu ul{
margin:0;
padding:0;
list-style:none;
}
#menu ul li{
float:left;
position:relative;
width:25%;
}
#menu ul li a{
color:blue;
display:block;
padding:15px 95px;
text-decoration:none;
}
#menu ul li a:hover{
background:purple;
color:white;
}

```

```

#menu ul li ul{
position:absolute;
    z-index: 99999;
left:9999px;
background:hotpink;
}
#menu ul li:hover ul{
left:0;
display:block;
}
#menu ul li ul li{
float:none;
width:250px;
}
#menu ul li ul li a{
background:hotpink;
color:blue;
padding:15px 85px;
}
#content {
    background-image: linear-gradient(pink, cadetblue);
    padding-left: 0px;
    height: 850px;
}
#content pre {
    color: darkblue;
    padding-top: 10px;
}

#footer {
    background-color: purple;
width:100%;
    height: 45px;
margin:245px 0px 0px 0px;
bottom:0;
top:673px;
position:absolute;
}
#footer p {
    padding-top: 10px;
    color: white;
}

```

```

</style>
</head>
<body>
  <div id="container">
    <div id="header">
      <h1 align="center">Retail</h1>
    </div>
    <div id="menu">
      <ul>
        <li><a href="Home.html"><h5>Home</h5></a></li>
        <li><a href="Rlogin.php"><h5>Reatiller</h5></a></li>
        <li><a href="Clogin.php"><h5>Customer</h5></a></li>
        <li><a href="Contact.html"><h5>Contact</h5></a></li>
      </ul>
    </div>
    <div id="content">
      <br><br><br><br><br>
      <div class="login-box">
        <div class="row">
          <div class="col mid-6">
            <h1>Login</h1>
            <form action="validation.php" method="POST">
              <div class="form-group">
                <h4> Rname</h4><input type="text" name="rname" class="form-control"
pattern="[a-zA-Z]+" required>
              </div>
              <div class="form-group">
                <h4>Rpass</h4><input type="password" name="rpass" class="form-control"
required>
              </div>
              <button type="submit" class="btn btn-primary">Login</button>
            </form>
          </div>
          <div class="col mid-6">
            <h1>Register</h1>
            <form action="Rll.php" method="POST">
              <div class="form-group">
                <h4>Rname</h4><input type="text" name="rname" class="form-control"
pattern="[a-zA-Z]+" required>
              </div>

```

```

<div class="form-group">
  <h4>Radd</h4><input type="text" name="radd" class="form-control"
required >
  </div>
  <div class="form-group">
    <h4>Rpass</h4><input type="password" name="rpass" class="form-control"
required>
    </div>
    <button type="submit" class="btn btn-primary">Register</button>
  </form>
</div></div></div>
<div id="footer">
  <p align="center">&#169;Copyrights Reserved</a></p>
</div>
<!-- Optional JavaScript; choose one of the two! -->
<!-- Option 1: jQuery and Bootstrap Bundle (includes Popper) -->
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js"
  integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j" crossorigin="anonymous"></script>
  <script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.bundle.min.js"
  integrity="sha384-
ho+j7jyWK8fNQe+A12Hb8AhRq26LrZ/JpcUGGOn+Y7RsweNrtN/tE3MoK7ZeZD
yx" crossorigin="anonymous"></script>
  <!-- Option 2: jQuery, Popper.js, and Bootstrap JS
  <script src="https://code.jquery.com/jquery-3.5.1.slim.min.js" integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j" crossorigin="anonymous"></script>
    <script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"
integrity="sha384-
9/reFTGAW83EW2RDu2S0VKaIzap3H66lZH81PoYlFhbGU+6BZp6G7niu735Sk7l
N" crossorigin="anonymous"></script>
    <script src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.min.js"
integrity="sha384-
w1Q4orYjBQndcko6MimVbzY0tgp4pWB4lZ7lr30WKz0vr/aWKhXdBNmNb5D92v
7s" crossorigin="anonymous"></script>
  -->
</div></body></html>

```

❖ validation.php

```
<?php
// include_once 'db.php';
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "retailer";
$conn = mysqli_connect($servername, $username, $password, $dbname);

if ($_POST) {
    $rname = $_POST["rname"];
    $rpassword = $_POST["rpass"];
    $sql = "SELECT rname rpass from rregister where rname ='" . $rname . "' AND
rpass='" . $rpassword . "' ";
    if (mysqli_query($conn, $sql)) {
        echo '<script>alert("Logged in successfully !")</script>';
    } else {
        echo "Error: " . $sql . " " . mysqli_error($conn);
    }
    mysqli_close($conn);
}
?>
<!doctype html>
<html lang="en">
<head>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-
fit=no">
    <!-- Bootstrap CSS -->
    <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/css/bootstrap.min.css"
integrity="sha384-
TX8t27EcRE3e/ihU7zmQxVncDAy5uIKz4rEkgIXeMed4M0jlfIDPvg6uqKI2xXr2"
crossorigin="anonymous">
<title>Retail</title>
```



```

<style>
#container {
  width: 100%;
  height: 100%;
  overflow: hidden;
}
#header {
  width: 15350px;
  height: 50px;
  background-color: purple;
  margin: 0px;
}
#menu{
background:hotpink;
min-height:54px;
width:100%;
}
#menu ul{
margin:0;
padding:0;
list-style:none;
}
#menu ul li{
float:left;
position:relative;
width:25%;
}
#menu ul li a{
color:blue;
display:block;
padding:15px 95px;
text-decoration:none;
}
#menu ul li a:hover{
background:purple;
color:white;
}

```

```

#menu ul li ul{
position:absolute;
    z-index: 99999;
left:9999px;
background:hotpink;
}
#menu ul li:hover ul{
left:0;
display:block;
}
#menu ul li ul li{
float:none;
width:250px;
}
#menu ul li ul li a{
background:hotpink;
color:blue;
padding:15px 85px;
}
#content {
    background-image: linear-gradient(pink, cadetblue);
    padding-left: 0px;
    height: 813px;
}
#content pre {
    color: darkblue;
    padding-top: 10px;
}

#footer {
    background-color: purple;
    height: 45px;
    margin-top: 0px;
}
#footer p {
    padding-top: 15px;
    color: white;
}
</style></head>

```

```

<body>
  <div id="container">
    <div id="header">
      <h1 style="align: center;">Retail</h1>
    </div>
    <div id="menu">
      <ul>
        <li><a href="Home.html">Home</a></li>
        <li><a href="Radd.html">Product</a></li>
        <li><a href="Rview.php">View Product</a></li>
        <li><a href="Contact.html">Contact</a>
      </ul>
    </div>
    <div id="content">
      <?php
        echo "<h4><b><marquee>Hello"." ".$$name." ".<b>Welcome to this
page</marquee></b></h4>";
      ?>
      <div class="add-box">
        <div class="row">
          <div class="col mid-6">
            <h1>Product</h1>
            <form method="post" action="Radd.php">
              <div class="form-group">
                <h4>Rpid:</h4><input type="number" name="rpId" class="form-control"
required>
              </div>
              <div class="form-group">
                <h4>Rpname</h4><input type="text" name="rpname" class="form-control"
required>
              </div>
              <div class="form-group">
                <h4>Rpbrand</h4><input type="text" name="rpbrand" class="form-control"
required>
              </div>
              <div class="form-group">
                <h4>Rpqty</h4><input type="number" name="rpqty" class="form-control"
required>
              </div>
            </form>
          </div>
        </div>
      </div>
    </div>
  </div>

```

```

<div class="form-group">
    <h4>Rpprice</h4><input type="number" name="rpprice" class="form-
control" required>
    </div>
    <div>
        <a href="Radd.php"> <button type="submit" class="btn btn-
primary"><h4>Add</h4></button></a>
        <button type="submit" class="btn btn-primary" formaction="Rdel.php"
><h4>Delete</h4></button>
        <button type="submit" class="btn btn-primary"
formaction="Rupdate.php"><h4>Update</h4></button>
    </div></form>
</div></div></div></div>
<div id="footer">
    <p align="center">&#169;Copyrights Reserved</a></p>
</div>
<!-- Optional JavaScript; choose one of the two! -->
<!-- Option 1: jQuery and Bootstrap Bundle (includes Popper) -->
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js"
integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.bundle.min.js"
integrity="sha384-
ho+j7jyWK8fNQe+A12Hb8AhRq26LrZ/JpcUGGOn+Y7RsweNrtN/tE3MoK7ZeZD
yx" crossorigin="anonymous"></script>
<!-- Option 2: jQuery, Popper.js, and Bootstrap JS
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js" integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j" crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"
integrity="sha384-
9/reFTGAw83EW2RDu2S0VKaIzap3H66lZ81PoYlFhbGU+6BZp6G7niu735Sk71
N" crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.min.js"
integrity="sha384-
w1Q4orYjBQndcko6MimVbzY0tgp4pWB4lZ7lr30WKz0vr/aWKhXdBNmNb5D92v
7s" crossorigin="anonymous"></script>
-->
</div></body></html>

```

❖ Rll.php

```
<?php

// include_once 'db.php';

$servername = "localhost";

$username = "root";

$password = "";

$dbname = "retailer";

$conn = mysqli_connect($servername, $username, $password, $dbname);

if ($_POST) {

    $rname = $_POST["rname"];

    $radd = $_POST["radd"];

    $password = $_POST["rpass"];

    $sql = "INSERT into rregister(rname, radd, rpass) VALUES('" . $rname. " , '" . $radd
    . "', '" . $password. "')";

    if (mysqli_query($conn, $sql)) {

        echo '<script>alert("Registered Successfully !")</script>';

        header("Location: Radd.html");

    }

    else{ echo "Error: " . $sql . " " . mysqli_error($conn);}

    mysqli_close($conn);}

?>
```

❖ Radd.html

```
<!doctype html>
<html lang="en">
<head>
  <!-- Required meta tags -->
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-
fit=no">
  <!-- Bootstrap CSS -->
  <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/css/bootstrap.min.css"
integrity="sha384-
TX8t27EcRE3e/ihU7zmQxVncDAy5uIKz4rEkgIXeMed4M0jlfIDPvg6uqKI2xXr2"
crossorigin="anonymous">
  <title>Retail</title>
  <style>
    #container {
      width: 100%;
      height: 100%;
      overflow: hidden;
    }
    #header {
      width: 2050px;
      height: 50px;
      background-color: purple;
      margin: 0px;
    }
    #header h1 {
      color: white;
      font: size 5;
      align: center;
    }
    #menu{
background:hotpink;
min-height:54px;
width:100%;
}
```

```

#menu ul{
margin:0;
padding:0;
list-style:none;
}
#menu ul li{
float:left;
position:relative;
width:25%;
}
#menu ul li a{
color:blue;
display:block;
padding:15px 95px;
text-decoration:none;
}
#menu ul li a:hover{
background:purple;
color:white;
}
#menu ul li ul{
position:absolute;
z-index: 99999;
left:9999px;
background:hotpink;
}
#menu ul li:hover ul{
left:0;
display:block;
}
#menu ul li ul li{
float:none;
width:250px;
}
#menu ul li ul li a{
background:hotpink;
color:blue;
padding:15px 85px;
}

```

```

#content {
    padding-left: 0px;
    height: 812px;
    background-image: linear-gradient(pink, cadetblue);
}

#content pre {
    color: darkblue;
    padding-top: 10px;
}

#footer {
    background-color: purple;
    height: 45px;
    margin-top: 0px;
}

#footer p {
    padding-top: 15px;
    color: white;
}

</style></head>
<body>
<div id="container">
    <div id="header">
        <h1 align="center"> Retail</h1>
    </div>
    <div id="menu">
        <ul>
            <li><a href="Home.html"><h5>Home</h5></a></li>
            <li><a href="Radd.html"><h5>Product</h5></a></li>
            <li><a href="Rview.php"><h5>View Product</h5></a></li>
            <li><a href="Contact.html"><h5>Contact</h5></a></li>
        </ul>
    </div>
    <div id="content">
        <b><marquee><h4>Welcome to this page</h4></marquee></b>
        <div class="add-box">
        <div class="row">
            <div class="col mid-6">
                <h1>Product</h1>
                <form method="post" action="Radd.php">

```



```

<div class="form-group">
    <h4>Rpid:</h4><input type="number" name="rpidx" class="form-control"
required>
</div>
    <div class="form-group">
        <h4>Rpname</h4><input type="text" name="rpname" class="form-control"
required>
</div>
        <div class="form-group">
            <h4>Rpbrand</h4><input type="text" name="rpbrand" class="form-control"
required>
</div>
            <div class="form-group">
                <h4>Rpqty</h4><input type="number" name="rpqty" class="form-control"
required>
</div>
                <div class="form-group">
                    <h4>Rpprice</h4><input type="number" name="rpprice" class="form-
control" required>
</div>
                    <div>
                        <a href="Radd.php"> <button type="submit" class="btn btn-
primary"><h4>Add</h4></button></a>
                        <button type="submit" class="btn btn-primary" formaction="Rdel.php"
><h4>Delete</h4></button>
                        <button type="submit" class="btn btn-primary"
formaction="Rupdate.php"><h4>Update</h4></button>
                    </div></form>
                </div></div></div></div>
<div id="footer">
    <p align="center">&#169;Copyrights Reserved</a></p>
</div>
<!-- Optional JavaScript; choose one of the two! -->
<!-- Option 1: jQuery and Bootstrap Bundle (includes Popper) -->
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js"
integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j" crossorigin="anonymous"></script>

```

```

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.bundle.min.js"
  integrity="sha384-
ho+j7jyWK8fNQe+A12Hb8AhRq26LrZ/JpcUGGOn+Y7RsweNrtN/tE3MoK7ZeZD
yx"
  crossorigin="anonymous"></script>

<!-- Option 2: jQuery, Popper.js, and Bootstrap JS
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js" integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j" crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"
integrity="sha384-
9/reFTGAW83EW2RDu2S0VKA1Zap3H66lZ81PoYlFhbGU+6BZp6G7niu735Sk7l
N" crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.min.js"
integrity="sha384-
w1Q4orYjBQndcko6MimVbzY0tgp4pWB4lZ7lr30WKz0vr/aWKhXdBNmNb5D92v
7s" crossorigin="anonymous"></script>
-->
</div>
</body>
</html>

```

❖ **Radd.php**

```
<?php
// include_once 'db.php';
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "retailer";
$conn = mysqli_connect($servername, $username, $password, $dbname);

if ($_POST) {
    $Rpid=$_POST["rpid"];
    $Rpname = $_POST["rpname"];
    $Rpbrand = $_POST["rpbrand"];
    $Rpqty = $_POST["rpqty"];
    $Rpprice = $_POST["rpprice"];
    $sql = "INSERT into rpadd(rpid,rpname, rpbrand, rpqty,rpprice)
VALUES('".$Rpid."',' ".$Rpname."',' ".$Rpbrand."',' ".$Rpqty."','
'".$Rpprice."')";
    if (mysqli_query($conn, $sql)) {
        echo '<script>alert("Product added successfully !")</script>';
    }
    else { echo "Error: " . $sql . " " . mysqli_error($conn);}
    mysqli_close($conn);}
?>
```

❖ **Rdel.php**

```
<?php
// include_once 'db.php';
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "retailer";
$conn = mysqli_connect($servername, $username, $password, $dbname);

if ($_POST) {
    $Rpid=$_POST["rpidd"];
    $Rpname = $_POST["rpname"];
    $Rpbrand = $_POST["rpbrand"];
    $Rpqty = $_POST["rpqty"];
    $Rpprice = $_POST["rpprice"];
    $sql = "Delete from rpadd where rpidd=" . $Rpid;
    if (mysqli_query($conn, $sql)) {
        echo '<script>alert("Product deleted successfully !")</script>';
    }
    else { echo "Error: " . $sql . " " . mysqli_error($conn);}
    mysqli_close($conn);}
?>
```

❖ **Rupdate.php**

```
<?php
// include_once 'db.php';
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "retailer";
$conn = mysqli_connect($servername, $username, $password, $dbname);

if ($_POST) {
    $Rpid=$_POST["rpaid"];
    $Rpname = $_POST["rpname"];
    $Rpbrand = $_POST["rpbrand"];
    $Rpqty = $_POST["rpqty"];
    $Rpprice = $_POST["rpprice"];
    $sql = "Update rpadd SET rpqty = '$Rpqty',
    rpprice = '$Rpprice' WHERE Rpid = $Rpid";
    if (mysqli_query($conn, $sql)) {
        echo '<script>alert("Product updated successfully !")</script>';
    }
    else { echo "Error: " . $sql . " " . mysqli_error($conn);}
    mysqli_close($conn);}
?>
```

❖ Rview.php

```
<!doctype html>
<html lang="en">
<head>
  <!-- Required meta tags -->
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1,
shrink-to-fit=no">
  <!-- Bootstrap CSS -->
  <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/css/bootstrap.min.css"
  integrity="sha384-
TX8t27EcRE3e/ihU7zmQxVncDAy5uIKz4rEkglIXeMed4M0jlfIDPvg6uqKI2
xXr2" crossorigin="anonymous">
  <title>Retail</title>
  <style>
    #container {
      width: 100%;
      height: 100%;
      overflow: hidden;
    }
    #header {
      width: 2050px;
      height: 50px;
      background-color: purple;
      margin: 0px;
    }
    #header h1 {
      color: white;
      font: size 5;
      align: center;
    }
    #menu{
background:hotpink;
min-height:60px;
width:100%;
    }
```

```
#menu ul{
margin:0;
padding:0;
list-style:none;
}
#menu ul li{
float:left;
position:relative;
width:25%;
}
#menu ul li a{
color:blue;
display:block;
padding:15px 95px;
text-decoration:none;
}
#menu ul li a:hover{
background:purple;
color:white;
}
#menu ul li ul{
position:absolute;
z-index: 99999;
left:9999px;
background:hotpink;
}
#menu ul li:hover ul{
left:0;
display:block;
}
#menu ul li ul li{
float:none;
width:250px;
}
#menu ul li ul li a{
background:hotpink;
color:blue;
padding:15px 85px;
}
```

```

#content {
    background-image: linear-gradient(pink, cadetblue);
    padding-left: 0px;
    height: 812px;
}
#content pre {
    color: darkblue;
    padding-top: 10px;
}
a:active{
color:brown;
text-decoration:none;
}
a:hover{
text-decoration:none;
color:brown;
}
#footer {
    background-color: purple;
    height: 45px;
    margin-top: 0px;
}
#footer p {
    padding-top: 15px;
    color: white;
}
</style></head>
<body>
<div id="container">
    <div id="header">
        <h1 align="center"> Retail</h1>
    </div>
    <div id="menu">
        <ul>
            <li><a href="Home.html"><h5>Home</h5></a></li>
            <li><a href="Radd.html"><h5>Product</h5></a></li>
            <li><a href="Rview.php"><h5>View Product</h5></a></li>
            <li><a href="Contact.html"><h5>Contact</h5></a></li>
        </ul>
    </div>

```



```

<div id="content">
  <h1 align="center">View Products</h1>
  <?php
    include("Rpview.php");
  ?>
</div>
<div id="footer">
  <p align="center">&#169;Copyrights Reserved</a></p>
</div>
<!-- Optional JavaScript; choose one of the two! -->
<!-- Option 1: jQuery and Bootstrap Bundle (includes Popper) -->
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js"
  integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.bundle.min.js"
  integrity="sha384-
ho+j7jyWK8fNQe+A12Hb8AhRq26LrZ/JpcUGGOn+Y7RsweNrtN/tE3MoK7ZeZD
yx" crossorigin="anonymous"></script>
<!-- Option 2: jQuery, Popper.js, and Bootstrap JS
  <script src="https://code.jquery.com/jquery-3.5.1.slim.min.js" integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j" crossorigin="anonymous"></script>
  <script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"
  integrity="sha384-
9/reFTGAW83EW2RDu2S0VKA1Zap3H66lZ81PoYlFhbGU+6BZp6G7niu735Sk7l
N" crossorigin="anonymous"></script>
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.min.js"
  integrity="sha384-
w1Q4orYjBQndcko6MimVbzY0tgp4pWB4lZ7lr30WKz0vr/aWKhXdBNmNb5D92v
7s" crossorigin="anonymous"></script>
  -->
</div></body></html>

```

❖ **Rpview.php**

```
<?php
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "retailer";
// Create connection
$conn = new mysqli($servername, $username, $password, $dbname);
// Check connection
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}
$sql = "SELECT * FROM rpadd";
$result = $conn->query($sql);
if ($result->num_rows > 0) {
    echo "<h4><table style='border:solid 5px
black;width:100%;height:80;}'><tr><th>Rpid</th><th>Rpame</th><th>Rpbr
and</th><th>Rpqty</th><th>Rpprice</th></tr>";
    // output data of each row
    while($row = $result->fetch_assoc()) {
        echo "<tr><td>".$row["Rpid"]."</td><td>".$row["Rpname"]."</td><td>
".$row["Rpbrand"]."</td><td>".$row["Rpqty"]."</td><td>".$row["Rpprice"].
"</td></tr>";
    }
    echo "</table></h4>";
} else {
    echo "0 results";
}
$conn->close();
?>
```

❖ Clogin.php

```
<!doctype html>
<html lang="en">
<head>
  <!-- Required meta tags -->
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-
fit=no">
  <!-- Bootstrap CSS -->
  <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/css/bootstrap.min.css"
integrity="sha384-
TX8t27EcRE3e/ihU7zmQxVncDAy5uIKz4rEkgIXeMed4M0jlfIDPvg6uqKI2xXr2"
crossorigin="anonymous">
  <title>Retail</title>
  <style>
    #container {
      width: 100%;
      height: 100%;
      overflow: hidden;
    }
    #header {
      width: 2050px;
      height: 50px;
      background-color: purple;
      margin: 0px;
    }
    #header h1 {
      color: white;
      font: size 5;
    }
    #menu{
background:hotpink;
min-height:60px;
width:100%;
}
```

```
#menu ul{
margin:0;
padding:0;
list-style:none;
}
#menu ul li{
float:left;
position:relative;
width:25%;
}
#menu ul li a{
color:blue;
display:block;
padding:15px 95px;
text-decoration:none;
}
#menu ul li a:hover{
background:purple;
color:white;
}
#menu ul li ul{
position:absolute;
z-index: 99999;
left:9999px;
background:hotpink;
}
#menu ul li:hover ul{
left:0;
display:block;
}
#menu ul li ul li{
float:none;
width:250px;
}
#menu ul li ul li a{
background:hotpink;
color:blue;
padding:15px 85px;
}
```

```

#content {
    background-image: linear-gradient(pink, cadetblue);
    padding-left: 0px;
    height: 850px;
}
#content pre {
    color: darkblue;
    padding-top: 10px;
}
#footer {
    background-color: purple;
width:100%;
    height: 45px;
margin:245px 0px 0px 0px;
bottom:0;
top:673px;
position:absolute;
}
#footer p {
    padding-top: 10px;
    color: white;
}
</style></head>
<body>
<div id="container">
    <div id="header">
        <h1 align="center">Retail</h1>
    </div>
    <div id="menu">
        <ul>
            <li><a href="Home.html"><h5>Home</h5></a></li>
            <li><a href="Rlogin.php"><h5>Reatiller</h5></a></li>
            <li><a href="Clogin.php"><h5>Customer</h5></a></li>
            <li><a href="Contact.html"><h5>Contact</h5></a></li>
        </ul>
    </div>

```

```

<div id="content">
  <br><br><br><br><br>
  <div class="login-box">
    <div class="row">
      <div class="col mid-6">
        <h1>Login</h1>
        <form action="cvalidation.php" method="post">
          <div class="form-group">
            <h5>Cid</h5><input type="number" name="Cid" class="form-control"
required>
          </div>
          <!--div class="form-group">
            <h5>Cname</h5><input type="text" name="Cname" class="form-control"
required>
          </div-->
          <div class="form-group">
            <h5>Cpass</h5><input type="password" name="Cpass" class="form-control"
required>
          </div>
          <button type="submit" class="btn btn-primary"><h5>Login</h5></button>
        </form>
      </div>
      <div class="col mid-6">
        <h1>Register</h1>
        <form action="reg.php" method="post">
          <div class="form-group">
            <div class="form-group">
              <h5>Cid</h5><input type="number" name="id" class="form-control"
required>
            </div>
            <h5>Cname</h5><input type="text" name="name" class="form-control"
pattern="[a-zA-Z]+" required>
          </div>
          <div class="form-group">
            <h5>Cemail</h5><input type="email" name="c_email" class="form-control"
required>
          </div>

```

```

<div class="form-group">
    <h5>Cadd</h5><input type="text" name="c_add" class="form-control"
required>
    </div>
    <div class="form-group">
        <h5>Ccontact</h5><input type="tel" name="c_contact" class="form-
control" pattern="[789][0-9]{9}" required>
        </div>
        <div class="form-group">
            <h5>Cpass</h5><input type="password" name="c_pass" class="form-
control" required>
            </div>
            <button type="submit" class="btn btn-
primary"><h5>Register</h5></button></a>
        </form></div>
    </div> </div>
<div id="footer">
    <p align="center">&#169;Copyrights Reserved</a></p>
</div>
<!-- Optional JavaScript; choose one of the two! -->
<!-- Option 1: jQuery and Bootstrap Bundle (includes Popper) -->
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js"
integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.bundle.min.js"
integrity="sha384-
ho+j7jyWK8fNQe+A12Hb8AhRq26LrZ/JpcUGGOn+Y7RsweNrtN/tE3MoK7ZeZD
yx" crossorigin="anonymous"></script>
<!-- Option 2: jQuery, Popper.js, and Bootstrap JS
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js" integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j" crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"
integrity="sha384-
9/reFTGAw83EW2RDu2S0VKaIzap3H66lZH81PoYlFhbGU+6BZp6G7niu735Sk7l
N" crossorigin="anonymous"></script>

```

```
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.min.js"
integrity="sha384-
w1Q4orYjBQndcko6MimVbzY0tgp4pWB4lZ7lr30WKz0vr/aWKhXdBNmNb5D92v
7s" crossorigin="anonymous"></script>
-->
</div>
</body>
</html>
```


❖ **cvalidation.php**

```
<?php
// include_once 'db.php';
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "retailer";
if($_POST){

    $Cid=$_POST["Cid"];

    $Cpass = $_POST["Cpass"];

    $conn = mysqli_connect($servername, $username, $password, $dbname);
        $sql = "Select * from cregister where Cid='".$Cid.'" AND '".$Cpass.'" ";
        $result = $conn->query($sql);

        if ($result->num_rows > 0) {

            echo "<script>alert('Login successfully !')</script>";
            header("Location: index.php");
        }
    else{ echo "Error: " . $sql . " " . mysqli_error($conn);}
    mysqli_close($conn);}
```

❖ **reg.php**

```
<?php
// include_once 'db.php';
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "retailer";
if($_POST){
    $Cid=$_POST["id"];
    $Cname = $_POST["name"];
    $Cemail=$_POST["c_email"];
    $Cadd = $_POST["c_add"];

    $Ccontact=$_POST["c_contact"];

    $Cpass = $_POST["c_pass"];

    $conn = mysqli_connect($servername, $username, $password, $dbname);
    $sql = "INSERT into cregister(Cid,Cname,Cemail,Cadd,Ccontact,Cpass)
VALUES('".$Cid."','".$Cname."','".$Cemail."', ".$Cadd."','".$Ccontact."',
'".$Cpass."')";
    if (mysqli_query($conn, $sql)) {

        echo "<script>alert('Registered successfully !')</script>";
        header("Location: index.php");

    }
    else{ echo "Error: " . $sql . " " . mysqli_error($conn);}
    mysqli_close($conn);}
?>
```

❖ index.php

```
<!doctype html>
<html lang="en">
<head>
  <!-- Required meta tags -->
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1,
shrink-to-fit=no">
  <!-- Bootstrap CSS -->
  <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/css/bootstrap.min.css"
  integrity="sha384-
TX8t27EcRE3e/ihU7zmQxVncDAy5uIKz4rEkgIXeMed4M0jlfIDPvg6uqKI2
xXr2" crossorigin="anonymous">

  <title>Retail</title>

  <style>

#container {
  width: 100%;
  height: 100%;
  overflow: hidden;
}

#header {
  width: 2050px;
  height: 50px;
  background-color: purple;
  margin: 0px;
}

#header h1 {

  color: white;
  font: size 5;
}
```

```
#menu{
background:hotpink;
min-height:60px;
width:100%;
}
#menu ul{
margin:0;
padding:0;
list-style:none;
}
#menu ul li{
float:left;
position:relative;
width:25%;
}
#menu ul li a{
color:blue;
display:block;
padding:15px 95px;
text-decoration:none;
}
#menu ul li a:hover{
background:purple;
color:white;
}
#menu ul li ul{
position:absolute;
z-index: 99999;
left:9999px;
background:hotpink;
}
#menu ul li:hover ul{
left:0;
display:block;
}
}
```

```
#menu ul li ul li{
float:none;
width:250px;
}
#menu ul li ul li a{
background:hotpink;
color:blue;
padding:15px 85px;
}
#content {
background-image: linear-gradient(pink, cadetblue);
padding-left: 0px;
height: 1660px;
padding-top: 10px;
}
.product_image{
padding-left:25px;
}
.product_pid{
padding-left:35px;
}
.product_name{
padding-left:35px;
}
.product_brand{
padding-left:35px;
}
.product_qty{
padding-left:35px;
}
.product_price{
padding-left:35px;
}
.product_cart{
padding-left:35px;
}
```

```

#footer {
display:block;
background-color: purple;
width:100%;
height: 60px;
padding-top:60px;
position:absolute;
padding-top: 10px;
    color: white;
text-align:center;

}

#footer p {
    padding-top: 10px;
    color: white;
}

</style></head>
<body>
<div id="container">
    <div id="header">
        <h1 align="center">Retail</h1>
    </div>
    <div id="menu">
        <ul>
            <li><a href="Home.html"><h5>Home</h5></a></li>
            <li><a href="index.php"><h5>Product</h5></a></li>
            <li><a href="Track.php"><h5>Track</h5></a></li>
            <li><a href="Contact.html"><h5>Contact</h5></a></li>
        </ul>
    </div>
    <div id="content">
        <?php
session_start();
//initialize cart if not set or is unset
if(!isset($_SESSION['cart'])){
$_SESSION['cart'] = array();
}
//unset qunatity
unset($_SESSION['pqty']);
?>

```

```

<nav class="navbar navbar-default">
  <div class="container-fluid">
    <div class="navbar-header">
      <a class="navbar-brand" href="#">Simple Shopping Cart</a>
    </div>

    <ul class="nav navbar-nav navbar-right">

      <li><a href="view_cart.php"><span class="badge"><?php echo count($_SESSION['cart']);
      ?></span> Cart <span class="glyphicon glyphicon-shopping-cart"></span></a></li> </div>

    </nav>

    <?php
    //info message
    if(isset($_SESSION['message'])){
      ?>
      <div class="row">
        <div class="col-sm-6 col-sm-offset-6">
          <div class="alert alert-info text-center">
            <?php echo $_SESSION['message']; ?>
          </div>
        </div>
      </div>
    }
    //end info message
    //fetch our products
    //connection
    $conn = new mysqli('localhost', 'root', '', 'retailer');
    $sql = "SELECT * FROM product";
    $query = $conn->query($sql);
    $inc = 20;
    while($row = $query->fetch_assoc()){
      $inc = ($inc == 20) ? 1 : $inc + 1;
      if($inc == 1) echo "<div class='row text-center'>";
      ?>

```

```

        <div class="col-md-4">
        <div class="panel panel-default">
        <div class="panel-body">
        <div class="row product_image">
        
        </div>

<div class="row product_pid">

<h4><?php echo $row['pid']; ?></h4>

</div>

<div class="row product_name">

<h4><?php echo $row['pname']; ?></h4>

</div>

<div class="row product_brand">

<h4><?php echo $row['pbrand']; ?></h4>

</div>

<div class="row product_qty">

<h4><?php echo $row['pqty']; ?></h4>

</div>

<div class="row product_price">

<h4><?php echo $row['pprice']; ?></h4>

</div>

<div class="row product_cart">

<span><a href="add_cart.php?id=<?php echo $row['pid']; ?>" class="btn btn-primary btn-sm"><span class="glyphicon glyphicon-plus"></span> Cart</a></span>

</div>

<br><br>

</div></div></div>

```



```

<?php
}
if($inc == 1) echo "<div></div><div></div><div></div></div>";
if($inc == 2) echo "<div></div><div></div></div>";
if($inc == 3) echo "<div></div></div>";
//end product row
?>
</div>
<div id="footer">
    &#169;Copyrights Reserved
</div>
<!-- Optional JavaScript; choose one of the two! -->

<!-- Option 1: jQuery and Bootstrap Bundle (includes Popper) -->

<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js"
    integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.bundle.min.js"
    integrity="sha384-
ho+j7jyWK8fNQe+A12Hb8AhRq26LrZ/JpcUGGOn+Y7RsweNrtN/tE3MoK7ZeZD
yx" crossorigin="anonymous"></script>
<!-- Option 2: jQuery, Popper.js, and Bootstrap JS
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js" integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+OrCXaRkf
j" crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"
integrity="sha384-
9/reFTGAw83EW2RDu2S0VKaIzap3H66lZH81PoYlFhbGU+6BZp6G7niu735Sk7l
N" crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.min.js"
integrity="sha384-
w1Q4orYjBQndcko6MimVbzY0tgp4pWB4lZ7lr30WKz0vr/aWKhXdBNmNb5D92v
7s" crossorigin="anonymous"></script>
-->
</div>
</body>
</html>

```

❖ **view_cart.php**

```
<?php
session_start();
?>
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<title> Shopping Cart </title>
<link rel="stylesheet" type="text/css" href="bootstrap/css/bootstrap.min.css">
<style>
    #container {
        width: 100%;
        height: 100%;
        overflow: hidden;
    }
    #header {
        width: 2050px;
        height: 50px;
        background-color: purple;
    }
    #header h1 {
        color: white;
        font: size 5;
    }
    #menu{
background:hotpink;
min-height:60px;
width:100%;
    }
    #menu ul{
margin:0;
padding:0;
list-style:none;
    }
```

```

#menu ul li{
float:left;
position:relative;
width:25%;
}
#menu ul li a{
color:blue;
display:block;
padding:15px 95px;
text-decoration:none;
}
#menu ul li a:hover{
background:purple;
color:white;
}
#menu ul li ul{
position:absolute;
z-index: 99999;
left:9999px;
background:hotpink;
}
#menu ul li:hover ul{
left:0;
display:block;
}
#menu ul li ul li{
float:none;
width:250px;
}
#menu ul li ul li a{
background:hotpink;
color:blue;
padding:15px 85px;
}
#content {
background-image: linear-gradient(pink, cadetblue);
padding-left: 0px;
height: 1660px;
padding-top: 10px;
}

```

```

#footer {
display:block;
background-color: purple;
width:100%;
height: 60px;
padding-top:60px;
position:absolute;
padding-top: 10px;
    color: white;
text-align:center;
}
#footer p {
    padding-top: 10px;
    color: white;
}
</style></head>
<body>
<div id="header">
    <h1 align="center">Retail</h1>
</div>
<div id="menu">
    <ul>
        <li><a href="Home.html"><h5>Home</h5></a></li>
        <li><a href="index.php"><h5>Product</h5></a></li>
        <li><a href="Track.php"><h5>Track</h5></a></li>
        <li><a href="Contact.html"><h5>Contact</h5></a></li>
    </ul>
</div>
<div id="content">
<nav class="navbar navbar-default">
    <div class="container-fluid">
        <div class="navbar-header">
            <a class="navbar-brand" href="#">Simple Shopping Cart</a>
        </div>
        <ul class="nav navbar-nav navbar-right">
            <li><a href="view_cart.php"><span class="badge"><?php echo
count($_SESSION['cart']); ?></span> Cart <span class="glyphicon
glyphicon-shopping-cart"></span></a></li>
        </ul>
    </div></nav>

```

```

<h1 class="page-header text-center">Cart Details</h1>
<div class="row">
<div class="col-sm-8 col-sm-offset-2">
<?php
if(isset($_SESSION['message'])){

?>

<div class="alert alert-info text-center">

<?php echo $_SESSION['message']; ?>

</div>

<?php
unset($_SESSION['message']);
}
?>
<form method="POST" action="save_cart.php">
<table class="table table-bordered table-striped">
<thead>
<th>Button</th>
<th>Name</th>
<th>Price</th>
<th>Quantity</th>
<th>Subtotal</th>
</thead>
<tbody>
<?php
//initialize total
$total = 0;
if(!empty($_SESSION['cart'])){
//connection
$conn = new mysqli('localhost', 'root', '', 'retailer');
//create array of initail qty which is 1
$index = 0;
if(!isset($_SESSION['pqty'])){
$_SESSION['pqty'] = array_fill(0, count($_SESSION['cart'], 1);}
// $sql = "SELECT * FROM product WHERE pid IN
('implode(',',$_SESSION['cart']).")";
// $query = $conn->query($sql);//
while ($row= $query -> fetch_assoc()){

```

```

$sql = "SELECT * FROM product WHERE pid IN
('".implode(',',$_SESSION['cart'])."')";
if($query = $conn->query($sql)) {
//echo "".$row = $query->fetch_assoc()."";
while($row = $query->fetch_assoc()){
?>
<tr>
<td>
<a href="delete_item.php?id=<?php echo $row['pid']; ?>&index=<?php echo
$index; ?>" class="btn btn-danger btn-sm"><span class="glyphicon
glyphicon-trash"></span></a>
</td>
<td><?php echo $row['pname']; ?></td>
<td><?php echo number_format($row['pprice'], 2); ?></td>
<input type="hidden" name="indexes[]" value="<?php echo $index; ?>">
<td><input type="text" class="form-control" value="<?php echo
$_SESSION['pqty'][$index]; ?>" name="qty_<?php echo $index; ?>"></td>
<td><?php echo number_format($_SESSION['pqty'][$index]*$row['pprice'],
2); ?></td>
<?php $total += $_SESSION['pqty'][$index]*$row['pprice']; ?>
</tr>

<?php

$index ++;

}}

else{

?>
echo "<tr>";
echo "<td colspan=4 class=text-center>No Item in Cart</td>";
echo "</tr>";
<?PHP }?>

```

```

<tr>
<td colspan='4' align='right'><b>Total</b></td>
<td><b><?php echo "".number_format($total, 2).""; ?></b></td>
</tr>
</tbody>
</table>
<a href="index.php" class="btn btn-primary"><span class="glyphicon glyphicon-arrow-left"></span> Back</a>
<button type="submit" class="btn btn-success" name="save">Save Changes</button>
<a href="clear_cart.php" class="btn btn-danger"><span class="glyphicon glyphicon-trash"></span> Clear Cart</a>
<a href="checkout.php" class="btn btn-success"><span class="glyphicon glyphicon-check"></span> Checkout</a>
</form></div>
</div><br><br>
<center><h1>Order</h1>
<form method="post" action="ins.php">
Oid:<input type="number" name="Oid" required><br><br><br>
Cid:<input type="number" name="Cid" required><br><br><br>
Pid:<input type="number" name="pid" required><br><br><br>
Cost:<input type="number" name="cost" max="1000000"
required><br><br><br>
Source:<textarea rows="4" name="Source" col="4" required>Enter Source Address</textarea><br><br>
Destination:<textarea rows="4" cols="15" name="Destination"
required>Enter Destination Address</textarea><br><br>
<a href="Track.php" target="_parent"><button>Submit</button></a>
</form></center>
</div>
<div id="footer">
&#169;Copyrights Reserved
</div>
<!-- Optional JavaScript; choose one of the two! -->
<!-- Option 1: jQuery and Bootstrap Bundle (includes Popper) -->
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js"
integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+Or
CXaRkfj" crossorigin="anonymous"></script>

```

```

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.bundle.min
.js"
    integrity="sha384-
ho+j7jyWK8fNQe+A12Hb8AhRq26LrZ/JpcUGGOn+Y7RsweNrtN/tE3MoK
7ZeZDyx" crossorigin="anonymous"></script>
    <!-- Option 2: jQuery, Popper.js, and Bootstrap JS
    <script src="https://code.jquery.com/jquery-3.5.1.slim.min.js"
integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+Or
CXaRkfj" crossorigin="anonymous"></script>
    <script
src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"
integrity="sha384-
9/reFTGAw83Ew2RDu2S0VKaIzap3H66lZH81PoYlFhbGU+6BZp6G7niu7
35Sk7lN" crossorigin="anonymous"></script>
    <script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.min.js"
integrity="sha384-
w1Q4orYjBQndcko6MimVbzY0tgp4pWB4lZ7lr30WKz0vr/aWKhXdBNmN
b5D92v7s" crossorigin="anonymous"></script>
    -->
</body>
</html>

```


❖ **add_cart.php**

```
<?php
session_start();
// $_GET['pid']=$_GET['pid']+1;
//check if product is already in the cart
if(!in_array($_GET['id'], $_SESSION['cart'])){
    array_push($_SESSION['cart'], $_GET['id']);
    $_SESSION['message'] = 'Product added to cart';
}
else{
    $_SESSION['message'] = 'Product already in cart';
}
header('location: index.php');
?>
```

❖ **delete_item.php**

```
<?php
session_start();
//remove the id from our cart array
$key = array_search($_GET['id'], $_SESSION['cart']);
unset($_SESSION['cart'][$key]);
unset($_SESSION['pqty'][$_GET['index']]);
//rearrange array after unset
$_SESSION['pqty'] = array_values($_SESSION['pqty']);
$_SESSION['message'] = "Product deleted from cart";
header('location: view_cart.php');
?>
```

❖ **save_item.php**

```
<?php
session_start();
if(isset($_POST['save'])){
    foreach($_POST['indexes'] as $key){
        $_SESSION['pqty'][$key] = $_POST['qty_'].$key;
    }
    $_SESSION['message'] = 'Cart updated successfully';
    header('location: view_cart.php');}
?>
```

❖ **clear_cart.php**

```
<?php
session_start();
unset($_SESSION['cart']);
$_SESSION['message'] = 'Cart cleared successfully';
header('location: index.php');
?>
```

❖ **checkout.php**

```
<?php
session_start();
header('location: Clogin.php');
?>
```

❖ **ins.php**

```
<?php
// include_once 'db.php';
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "retailer";
$conn = mysqli_connect($servername, $username, $password, $dbname);
if ($_POST) {
    $oid=$_POST["Oid"];
    $pid = $_POST["pid"];
    $cid = $_POST["Cid"];
    $cost = $_POST["cost"];
    $source = $_POST["Source"];
    $destination = $_POST["Destination"];
    $sql = "INSERT into orders(oid,pid,cid,cost,source,destination)
VALUES('" . $oid. "','" . $pid. "','" . $cid . "','" . $cost. "','" . $source
.'"','" . $destination . "')";
    if (mysqli_query($conn, $sql)) {
        echo "<script>alert('Product added successfully !');</script>";
        header("Location: Track.php");}
    else {
        echo "Error: " . $sql . " " . mysqli_error($conn);}
    mysqli_close($conn);}
else{
    echo("Error");}?>
```

❖ Track.php

```
<!doctype html>
<html lang="en">
<head>
  <!-- Required meta tags -->
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1,
shrink-to-fit=no">
  <!-- Bootstrap CSS -->
  <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/css/bootstrap.min.
css"
  integrity="sha384-
TX8t27EcRE3e/ihU7zmQxVncDAy5uIKz4rEkgIXeMed4M0jlfIDPvg6uq
KI2xXr2" crossorigin="anonymous">
  <title>Retail</title>
  <style>
    #container {
      width: 100%;
      height: 100%;
      overflow: hidden;
    }
    #header {
      width: 2050px;
      height: 50px;
      background-color: purple;
      margin: 0px;
    }
    #header h1 {
      color: white;
      font: size 5;
      align: center;
    }
    #menu{
background:hotpink;
min-height:60px;
width:100%;
    }
```

```
#menu ul{
margin:0;
padding:0;
list-style:none;
}
#menu ul li{
float:left;
position:relative;
width:25%;
}
#menu ul li a{
color:blue;
display:block;
padding:15px 95px;
text-decoration:none;
}
#menu ul li a:hover{
background:purple;
color:white;
}
#menu ul li ul{
position:absolute;
z-index: 99999;
left:9999px;
background:hotpink;
}
#menu ul li:hover ul{
left:0;
display:block;
}
#menu ul li ul li{
float:none;
width:250px;
}
#menu ul li ul li a{
background:hotpink;
color:blue;
padding:15px 85px;
}
```

```

#content {
    background-image: linear-gradient(pink, cadetblue);
    padding-left: 0px;
    height: 812px;
}
#content pre {
    color: darkblue;
    padding-top: 10px;
}
a:active{
color:brown;
text-decoration:none;
}
a:hover{
text-decoration:none;
color:brown;
}
#footer {
    background-color: purple;
    height: 45px;
    margin-top: 0px;
}
#footer p {
    padding-top: 15px;
    color: white;
}
</style></head>
<body>
<div id="container">
<div id="header">
    <h1 align="center"> Retail</h1>
</div>
<div id="menu">
    <ul>
    <li><a href="Home.html"><h5>Home</h5></a></li>
    <li><a href="index.php"><h5>Product</h5></a></li>
    <li><a href="Track.php"><h5>Track Product</h5></a></li>
    <li><a href="Contact.html"><h5>Contact</h5></a></li>
    </ul>
</div>

```

```

<div id="content">
  <h1 align="center">Track Products</h1>
  <?php
    include("Tracks.php");
  ?>
</div>
<div id="footer">
  <p align="center">&#169;Copyrights Reserved</a></p>
</div>
<!-- Optional JavaScript; choose one of the two! -->
<!-- Option 1: jQuery and Bootstrap Bundle (includes Popper) -->
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js"
  integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew
+OrCXaRkfj"
  crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.bundle
.min.js"
  integrity="sha384-
ho+j7jyWK8fNQe+A12Hb8AhRq26LrZ/JpcUGGOn+Y7RsweNrtN/tE3
MoK7ZeZDyx"
  crossorigin="anonymous"></script>
<!-- Option 2: jQuery, Popper.js, and Bootstrap JS
<script src="https://code.jquery.com/jquery-3.5.1.slim.min.js"
integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew
+OrCXaRkfj" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.j
s" integrity="sha384-
9/reFTGAW83EW2RDu2S0VKA1zap3H66lZH81PoYlFhbGU+6BZp6G7
niu735Sk7lN" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.min.js"
integrity="sha384-
w1Q4orYjBQndcko6MimVbzY0tgp4pWB4lZ7lr30WKz0vr/aWKhXdBN
mNb5D92v7s" crossorigin="anonymous"></script>
-->
</div></body></html>

```

❖ **Tracks.php**

```
<?php
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "retailer";
// Create connection
$conn = new mysqli($servername, $username, $password, $dbname);
// Check connection
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}
$sql = "SELECT * FROM orders";
$result = $conn->query($sql);
if ($result->num_rows > 0) {
    echo "<h4><table style='border:solid 5px
black;width:100%;height:80;}'><tr><th>Oid</th><th>pid</th><th>cid</th><
th>cost</th><th>Source</th><th>Destination</th></tr>";
    // output data of each row
    while($row = $result->fetch_assoc()) {
        echo
        "<tr><td>".$row["Oid"]."</td><td>".$row["pid"]."</td><td>".$row["cid"]."<
        /td><td>".$row["cost"]."</td><td>".$row["Source"]."</td><td>".$row["Desti
        nation"]."</td></tr>";
    }
    echo "</table></h4>";
} else {
    echo "0 results";
}
$conn->close();
?>
```

❖ **Contact.html**

```
<!doctype html>
<html lang="en">
<head>
  <!-- Required meta tags -->
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1,
shrink-to-fit=no">
  <!-- Bootstrap CSS -->
  <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/css/bootstrap.min.css
"
    integrity="sha384-
TX8t27EcRE3e/ihU7zmQxVncDAy5uIKz4rEkgIXeMed4M0jlfIDPvg6uqKI
2xXr2" crossorigin="anonymous">
  <title>Retail</title>
  <style>
    #container {
      width: 100%;
      height: 100%;
      overflow: hidden;
    }
    #header {
      width: 2050px;
      height: 50px;
      background-color: purple;
      margin: 0px;
    }
    #header h1 {
      color: white;
      font: size 5;
      align: center;
    }
  </style>
```



```
#menu{
background:hotpink;
min-height:60px;
width:100%;
}
#menu ul{
margin:0;
padding:0;
list-style:none;
}
#menu ul li{
float:left;
position:relative;
width:25%;
}
#menu ul li a{
color:blue;
display:block;
padding:15px 95px;
text-decoration:none;
}
#menu ul li a:hover{
background:purple;
color:white;
}
#menu ul li ul{
position:absolute;
z-index: 99999;
left:9999px;
background:hotpink;
}
#menu ul li:hover ul{
left:0;
display:block;
}
#menu ul li ul li{
float:none;
width:250px;
}
```

```

#menu ul li ul li a{
background:hotpink;
color:blue;
padding:15px 85px;
}
#content {
background-color:cadetblue;
padding-left: 0px;
height: 812px;
}
#content pre {
color: darkblue;
padding-top: 10px;
font-size:xx-large;
}
#footer {
background-color: purple;
height: 45px;
margin-top: 0px;
}
#footer p {
padding-top: 15px;
color: white;
}
</style></head>
<body>
<div id="container">
<div id="header">
<h1 align="center">Retail</h1>
</div>
<div id="menu">
<ul>
<li><a href="Home.html"><h5>Home</h5></a></li>
<li><a href="Rlogin.php"><h5>Reatiller</h5></a></li>
<li><a href="Clogin.php"><h5>Customer</h5></a></li>
<li><a href="Contact.html"><h5>Contact</h5></a></li>
</ul>
</div>

```

```

<div id="content">
  <iframe
src="https://www.google.com/maps/embed?pb=!1m18!1m12!1m3!1d3501.12
53867389587!2d77.1323627149239!3d28.655964082408477!2m3!1f0!2f0!3f
0!3m2!1i1024!2i768!4f13.1!3m3!1m2!1s0x390d0309287df3c5%3A0xb8b7a
2787e88aa69!2sLane%20Number%209%2C%20Ram%20Garh%20Colony%
2C%20Basai%20Dara%20pur%2C%20Bali%20Nagar%2C%20New%20Del
hi%2C%20Delhi%20110015!5e0!3m2!1sen!2sin!4v1617719678200!5m2!1s
en!2sin" width="2050" height="450" style="border:0;" allowfullscreen=""
loading="lazy"></iframe>
    <pre><strong>      Retail Pvt Ltd.
      Address-WZ-622,St-9,Ramgarh Colony,New Delhi-110015
      Customer Care: 7982909087
      E-mail : retail@sales.in
    </strong> </pre>
  </div>
  <div id="footer">
    <p align="center">&#169;Copyrights Reserved</a></p>
  </div>
  <!-- Optional JavaScript; choose one of the two! -->
  <!-- Option 1: jQuery and Bootstrap Bundle (includes Popper) -->
  <script src="https://code.jquery.com/jquery-3.5.1.slim.min.js"
    integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+Or
CXaRkfj"
    crossorigin="anonymous"></script>
  <script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.bundle.mi
n.js"
    integrity="sha384-
ho+j7jyWK8fNQe+A12Hb8AhRq26LrZ/JpcUGGOn+Y7RsweNrtN/tE3MoK
7ZeZDyx"
    crossorigin="anonymous"></script>
  <!-- Option 2: jQuery, Popper.js, and Bootstrap JS
  <script src="https://code.jquery.com/jquery-3.5.1.slim.min.js"
integrity="sha384-
DfXdz2htPH0lsSSs5nCTpuj/zy4C+OGpamoFVy38MVBnE+IbbVYUew+Or
CXaRkfj" crossorigin="anonymous"></script>

```

```

<script
src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"
integrity="sha384-
9/reFTGAw83EW2RDu2S0VKaIzap3H66lZH81PoYlFhbGU+6BZp6G7niu
735Sk7lN" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/js/bootstrap.min.js"
integrity="sha384-
w1Q4orYjBQndcko6MimVbzY0tgp4pWB4lZ7lr30WKz0vr/aWKhXdBNmN
b5D92v7s" crossorigin="anonymous"></script>
-->
</div>
</body>
</html>

```

❖ **db.php**

```

<?php
/* Database connection start */
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "retailer";
$conn = mysqli_connect($servername, $username, $password, $dbname);
if (mysqli_connect_errno()) {
    printf("Connect failed: %s\n", mysqli_connect_error());
    exit();
}
?>

```

TESTING AND VALIDATIONS

A Test Case is a set of actions executed to verify a particular feature or functionality of your software application. A Test Case contains test steps, test data, pre - condition, post - condition developed for specific test scenario to verify any requirement. The test case includes specific variables or conditions, using which a testing engineer can compare expected and actual results to determine whether a software product is functioning as per the requirements of the customer. I have performed unit testing.

Case 1:Customer's Form(Register and Login)

Test Case	Test Items	Input Specification	Input Values	Expected Output	Actual Output	Results
Register	1) Id	1)Input numerical value	1	1)	1) 1	1)Valid
		2)Leave the field blank		2)Error	2)Please fill out this field.	2)Valid
		3)Enter special character in the field.	#@	3)Error	3)Displayed Error	3)Valid
		4)Enter string value	rishika	4)Error	4)Displayed Error	4)Valid

	2) Name	1)Input numerical value	1	1)Error	1) Please match the requested format	1)Valid
		2)Leave the field blank		2)Error	2)Please fill out this field.	2)Valid
		3)Enter special character in the field.	#@	3)Error	3)Please match the requested format	3)Valid
		4)Enter string value	rishika	4)	4)	4)Valid

	3) Email	1)Leave the field blank		1)Error	1) Please fill out this field.	1)Valid
		2)Enter special characters in the field.	@#\$	2)Error	2)Please fill out this field.	2)Valid
		3)Enter special character in the field.	#@	3)Error	3)Displayed format	3)Valid
		4)Enter string value	Rishika2	4)Error	4)Please include @ in the email address.	4)Valid
		5)Enter email id	rishika2@gmail.com	5)	5)	5)Valid

	4)Address	1)Leave the field blank		1)Error	1) Please fill out this field.	1)Valid
		2)Enter numerical values in the field.	123	2)	2)	2)Valid
		3)Enter special character in the field.	#@	3)	3)	3)Valid
		4)Enter string Value	Rishika	4)	4)	4)Valid

	5)Contact	1)Input the string value	rishika	1)Error	1)Please match the requested format.	1)Valid
		2)Leave the field blank		2)Error	2)Please fill out this field.	2)Valid
		3)Enter special character in this field.	#@	3)Error	3)Please match the requested format.	3)Valid
		4)Enter more than 10 digits.	80923456781	4)Please match the requested format.	4)Please match the requested format.	4)Valid
		5)Enter less than 10 digits.	798290908	5)Please match the requested format.	5)Please match the requested format.	5)Valid
		6)Enter 10 digit numeric mobile number.	7982909087	6)	6)	5)Valid

Login	6>Password	1)Input the numerical value	123	1)Index page	1)Index page	1)Valid
		2)Leave the field blank		2)Error	2)Please fill out this field.	2)Valid
		3)Enter special character in this field.	#@	3)Index page	3)Index page	3)Valid
		4)string value	rishika	4)	4)	4)Valid
	Login form	1)Incorrect login details	5 45	1)Error	1)Display error	1)Valid
		2>Login id is correct, but the password is incorrect	1 46	2)Error	2)Display Error	2)Valid
		3>Login id or password is blank,or both are blank		3)Error	3)Please fill out this field.	3)Valid
		4>Login id and password both are correct.	1 2345	4)Index page	4)Index page	4)Valid

Case 1:Retailer's Form(Register and Login)

Test Case	Test Items	Input Specification	Input Values	Expected Output	Actual Output	Results
Register	1)Name	1)Input numerical value	1	1)Error	1) Please match the requested format	1)Valid
		2)Leave the field blank		2)Error	2)Please fill out this field.	2)Valid
		3)Enter special character in the field.	#@	3)Error	3)Please match the requested format	3)Valid
		4)Enter string value	rishika	4)	4)	4)Valid

	2)Address	1)Leave the field blank		1)Error	1) Please fill out this field.	1)Valid
		2)Enter numerical values in the field.	123	2)	2)	2)Valid
		3)Enter special character in the field.	#@	3)	3)	3)Valid
		4)Enter string Value	Rishika	4)	4)	4)Valid

Login	6>Password	1)Input the numerical value	123	1)Index page	1)Index page	1)Valid
		2)Leave the field blank		2)Error	2)Please fill out this field.	2)Valid
		3)Enter special character in this field.	#@	3)Index page	3)Index page	3)Valid
		4)string value	rishika	4)	4)	4)Valid
	Login form	1)Incorrect login details	bb 45	1)Error	1)Display error	1)Valid
		2>Login name is correct, but the password is incorrect	aa 46	2)Error	2)Display Error	2)Valid
		3>Login name or password is blank,or both are blank		3)Error	3)Please fill out this field.	3)Valid
		4>Login name and password both are correct.	Priya 2134	4)Radd page	4)Radd page	4)Valid

Case 3:Order's Form(Register and Login)

Test Case	Test Items	Input Specification	Input Values	Expected Output	Actual Output	Results
Order	1)Order Id	1)Input numerical value	1	1)	1) 1	1)Valid
		2)Leave the field blank		2)Error	2)Please fill out this field.	2)Valid
		3)Enter special character in the field.	#@	3)Error	3)Displayed Error	3)Valid
		4)Enter string value	Rishika	4)Error	4)Error displayed	4)Valid
	2)Customer Id	1)Input numerical value	1	1)	1) 1	1)Valid
		2)Leave the field blank		2)Error	2)Please fill out this field.	2)Valid
		3)Enter special character in the field.	#@	3)Error	3)Displayed Error	3)Valid
		4)Enter string value	rishika	4)Error	4)Error displayed	4)Valid

Order	3)Product Id	1)Input numerical value	1	1)	1) 1	1)Valid
		2)Leave the field blank		2)Error	2)Please fill out this field.	2)Valid
		3)Enter special character in the field.	#@	3)Error	3)Displayed Error	3)Valid
		4)Enter string value	Rishika	4)Error displayed	4)Error displayed	4)Valid
	4)Cost	1)Input numerical value	1	1)	1) 1	1)Valid
		2)Leave the field blank		2)Error	2)Please fill out this field.	2)Valid
		3)Enter special character in the field.	#@	3)Error	3)Displayed Error	3)Valid
		4)Enter string Value	Rishika	4)Error	4)Error displayed	4)Valid
		5)Numerical value should be less than or equal to 1000000	5)	5)	5)	5)Valid

	5)Source Address	1)Leave the field blank		1)Error	1) Please fill out this field.	1)Valid
		2)Enter numerical values in the field.	123	2)	2)	2)Valid
		3)Enter special character in the field.	#@	3)	3)	3)Valid
		4)Enter string Value	Rishika	4)	4)	4)Valid
	6)Destination Address	1)Leave the field blank		1)Error	1) Please fill out this field.	1)Valid
		2)Enter numerical values in the field.	123	2)	2)	2)Valid
		3)Enter special character in the field.	#@	3)	3)	3)Valid
		4)Enter string Value	Rishika	4)	4)	4)Valid


Validations

Html5 and regex has been used for validation. Validations include:-

1. No field should be left blank
2. All the user inputs have been validated according to their standard patterns.
3. Phone number should only contain 10 digits starting from either 7, 8 or 9
4. Email is validated according to its pattern
5. Name should contain only alphabets.

OUTPUT

❖ Home.html

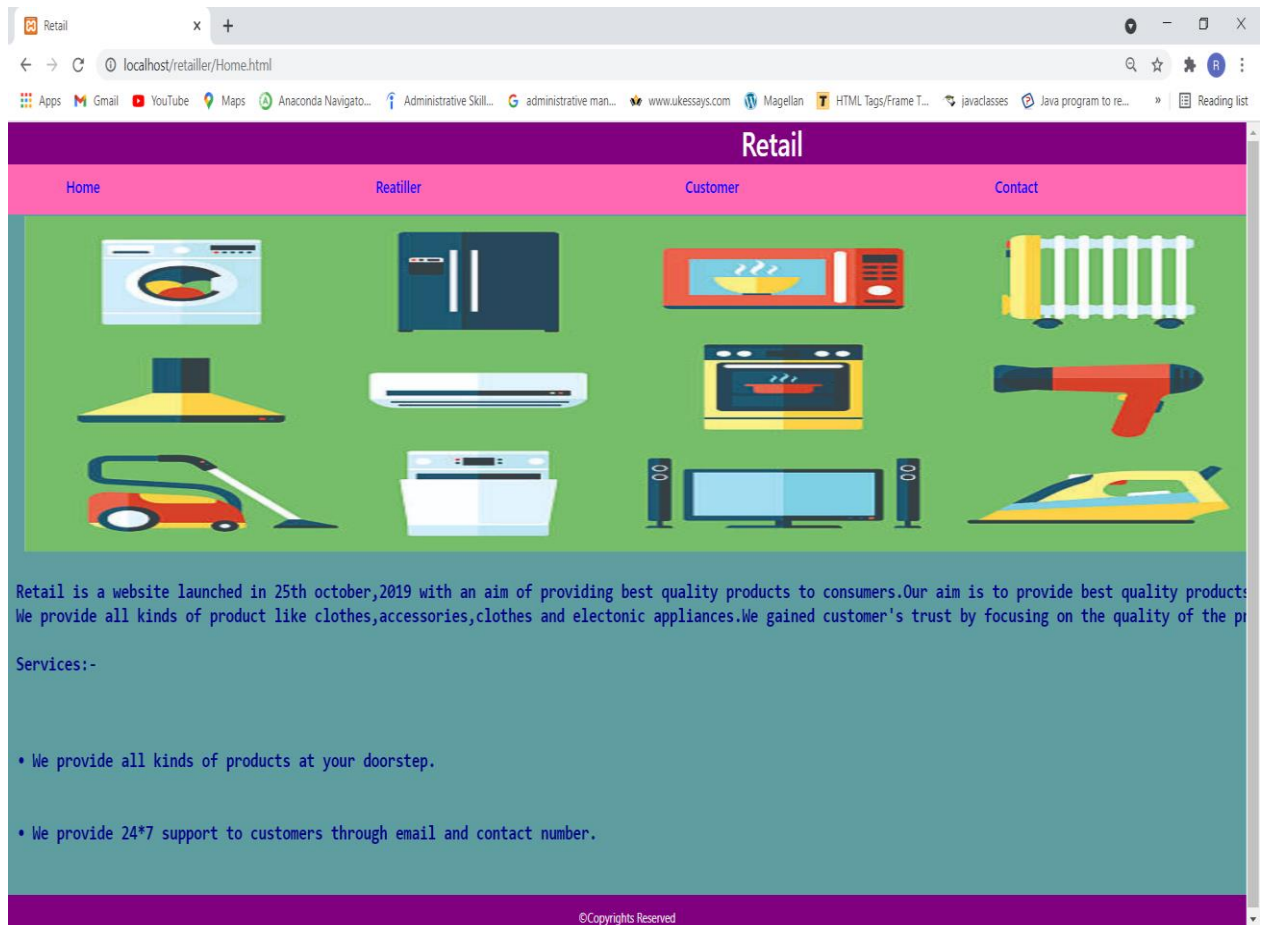

❖ Rlogin.php

Retail

Home Reatiller Customer Contact

Login

Rname

Rpass

Login

Register

Rname

Radd

Rpass

Register

©Copyrights Reserved

Retail

Home Reatiller Customer Contact

Login

Rname

Rpass

Login

Register


Rname

Radd


Rpass

Register


©Copyrights Reserved

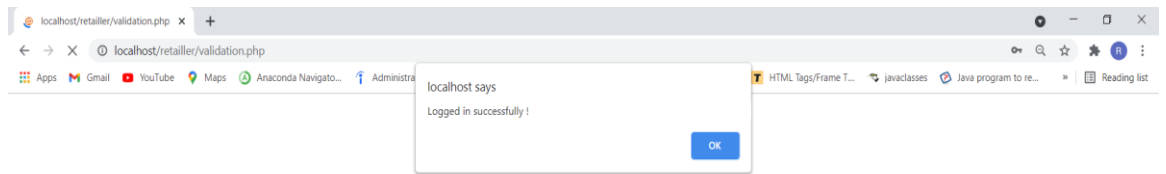


❖ Radd.html

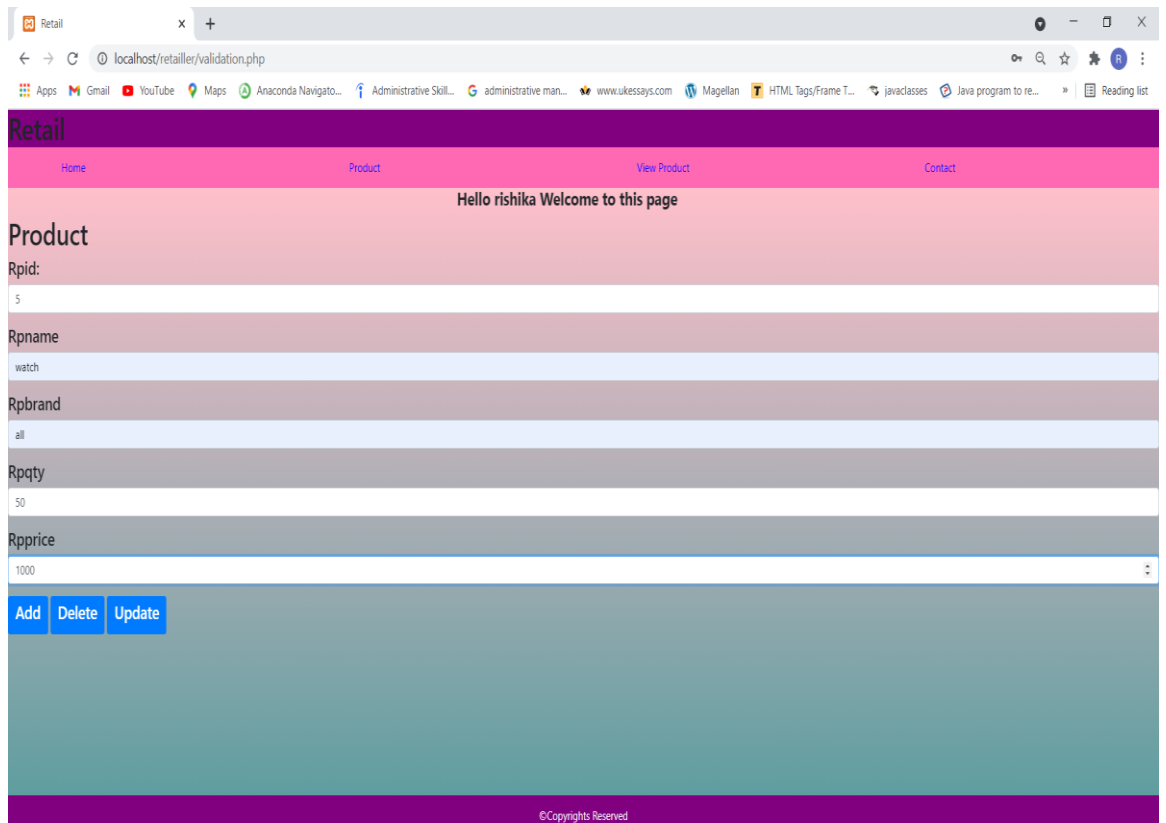


❖ Radd.php

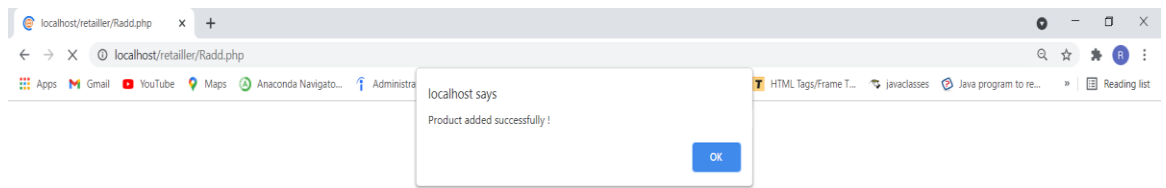


❖ Rupdate.php

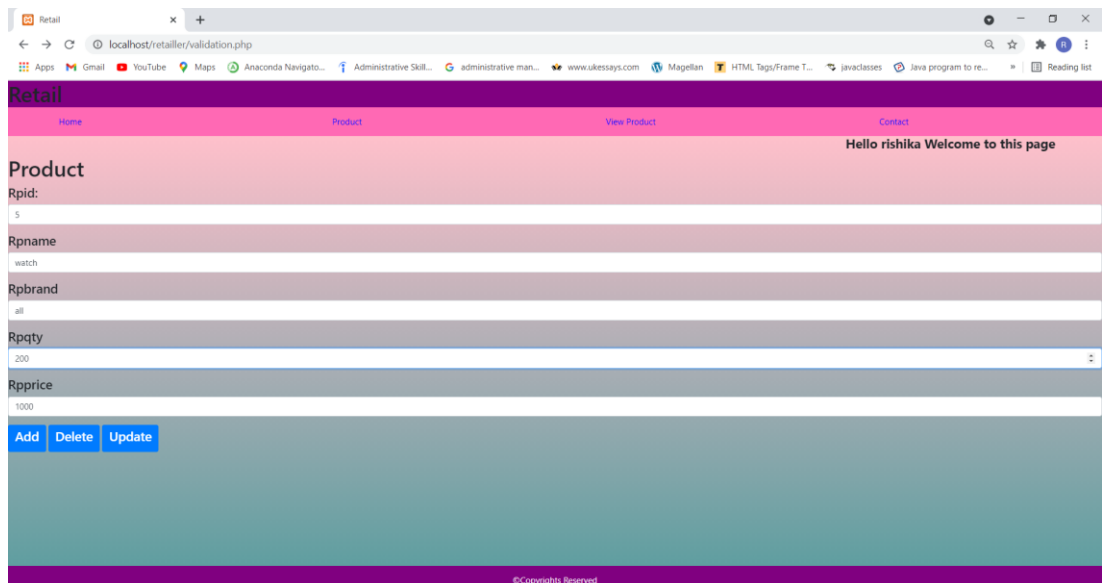


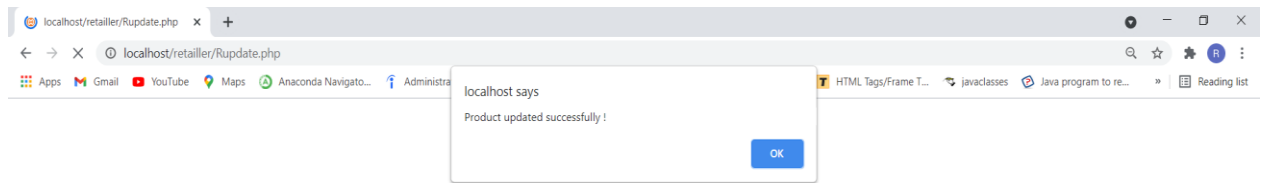


Waiting for localhost...

❖ Rdel.php

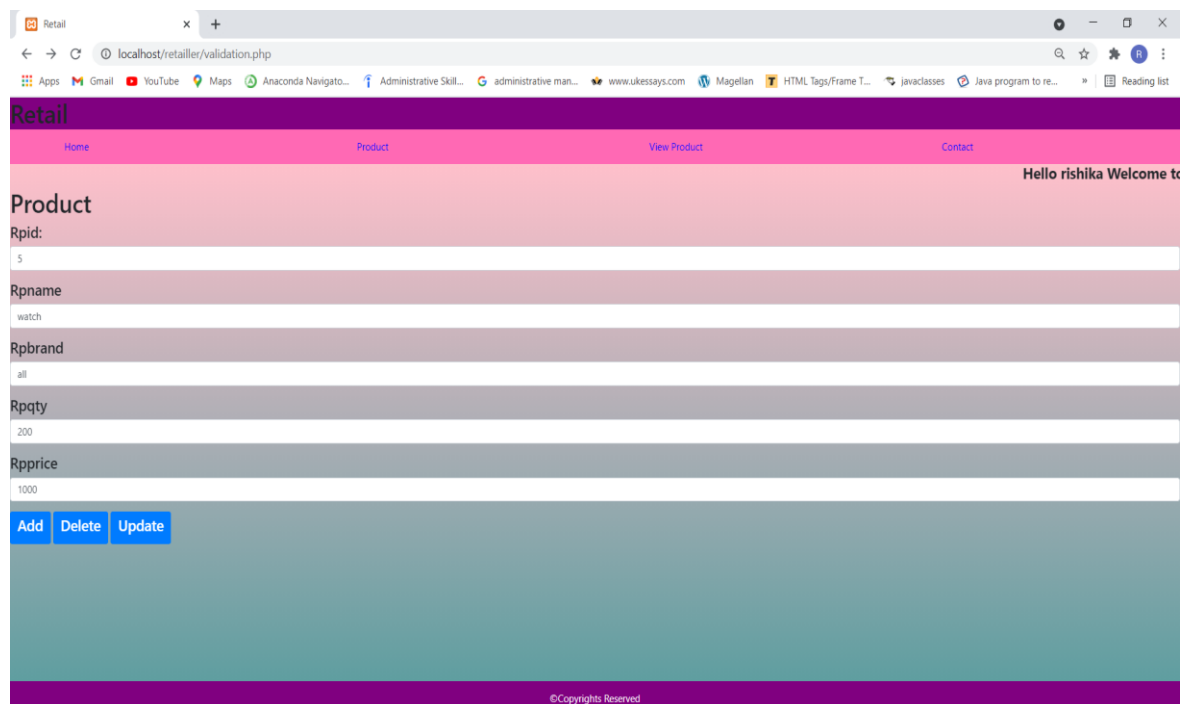

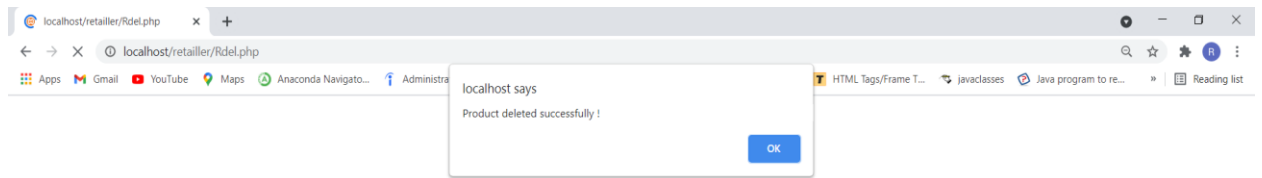

❖ Rview.php


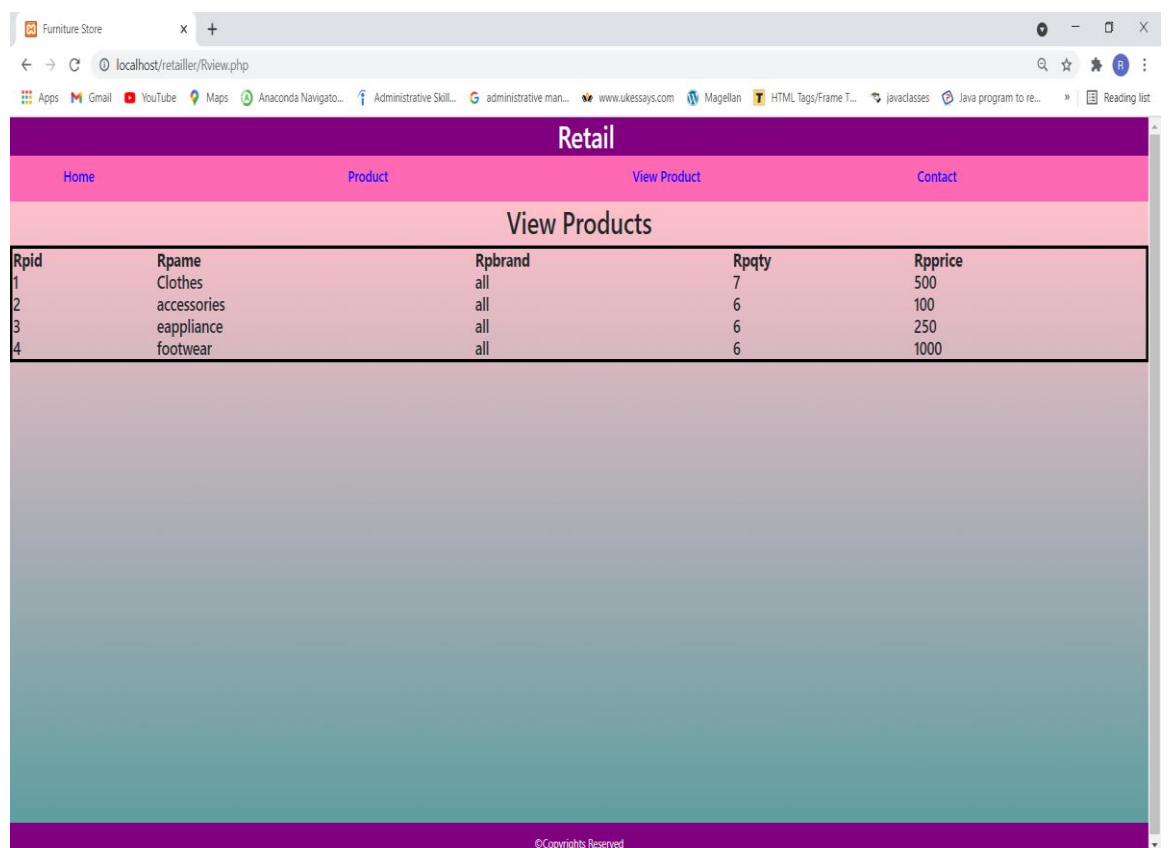


❖ Clogin.php



The screenshot shows a web browser window with the URL `localhost/retailer/Clogin.php`. The page has a purple header with the word "Retail" and a pink navigation bar with links: Home, Reatiller, Customer, and Contact. The main content area is divided into two columns. The left column is titled "Login" and contains a form with fields for "Cid" (containing "1") and "Cpass" (containing "..."). Below these fields is a blue "Login" button. The right column is titled "Register" and contains a form with fields for "Cid" (containing "1"), "Cname" (containing "priya"), "Cemail" (containing "priya134@gmail.com"), "Cadd" (containing "Sec-3,Rohini,ND-110058"), "Ccontact" (containing "7011412878"), and "Cpass" (containing "..."). Below these fields is a blue "Register" button. The footer of the page is purple and contains the text "©Copyrights Reserved".

The screenshot shows the same web browser window as above, but with different input values in the forms. In the "Login" form, the "Cid" field contains "1" and the "Cpass" field contains "...". In the "Register" form, the "Cid" field is empty, and the "Cname" field contains "priya". The "Cemail", "Cadd", "Ccontact", and "Cpass" fields are empty. The "Register" button is still present. The footer of the page is purple and contains the text "©Copyrights Reserved".

❖ Index.php

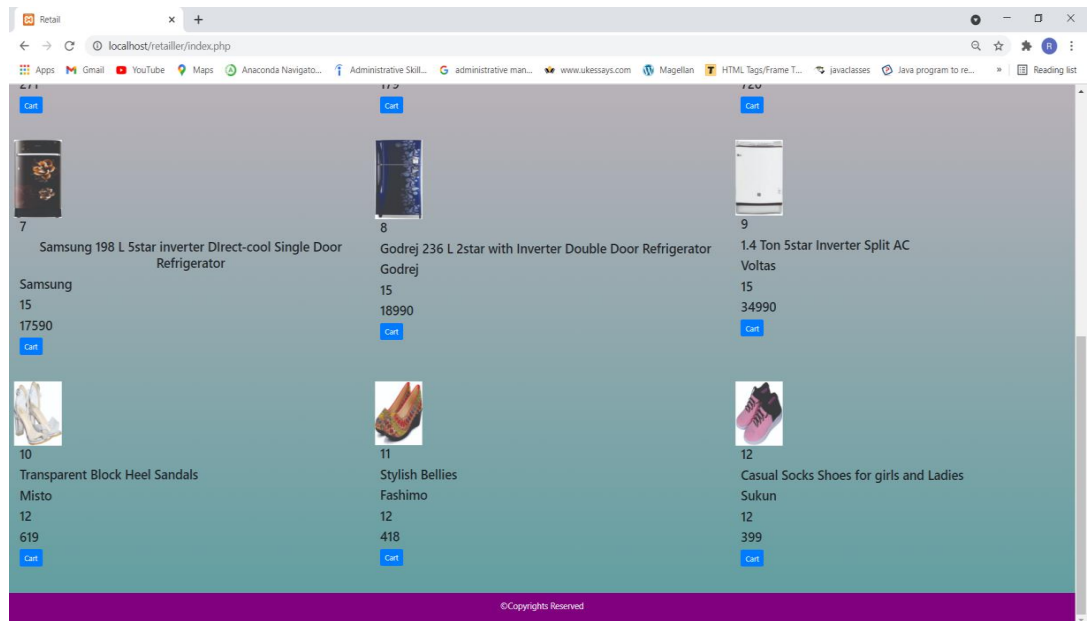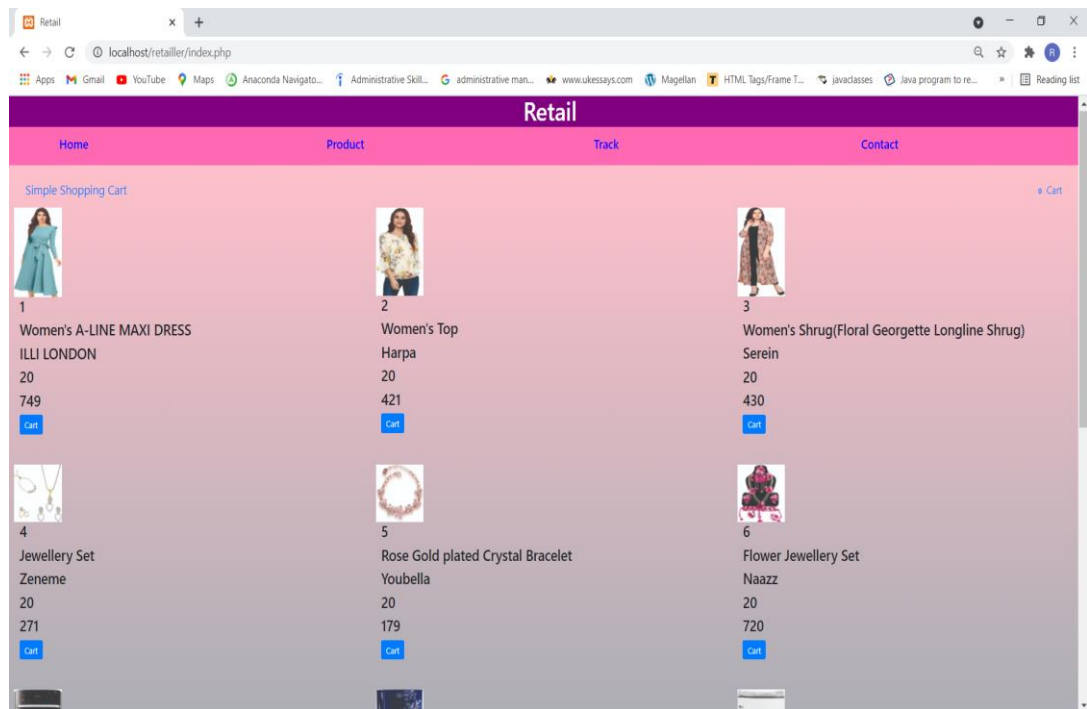

❖ add_cart.php

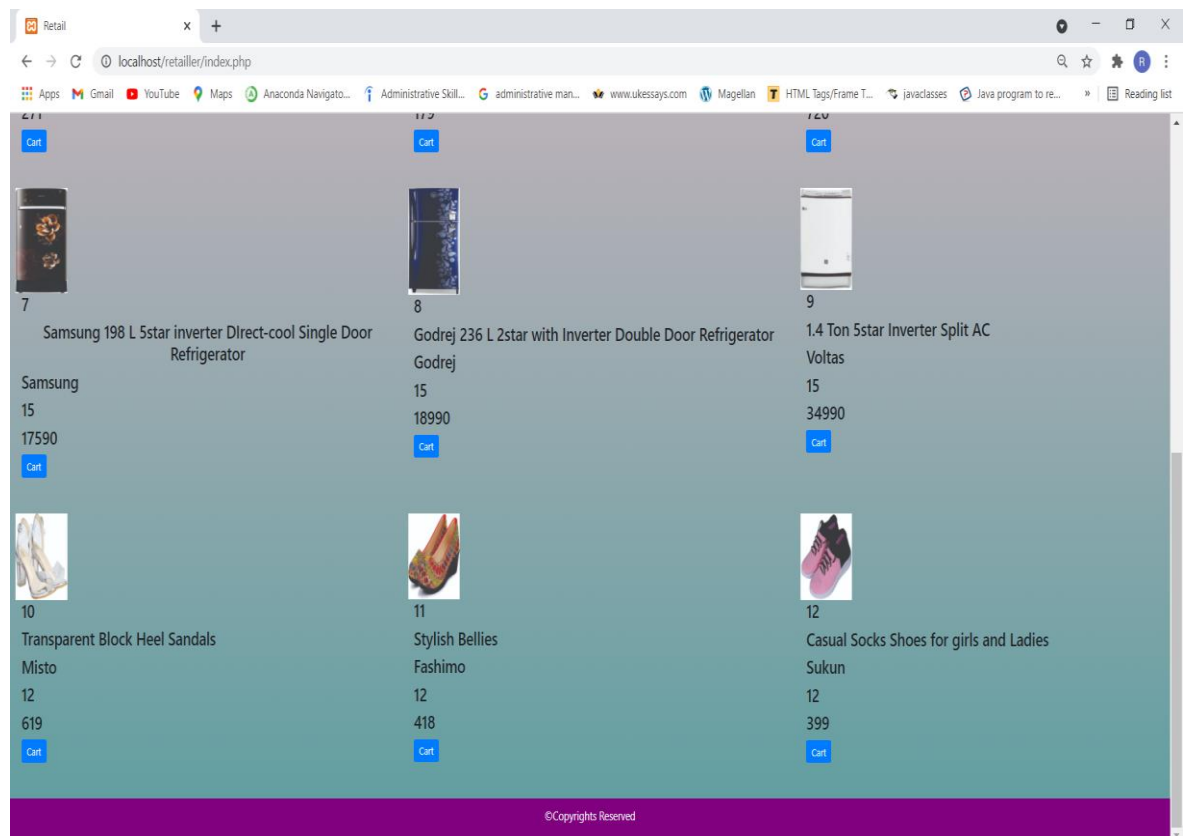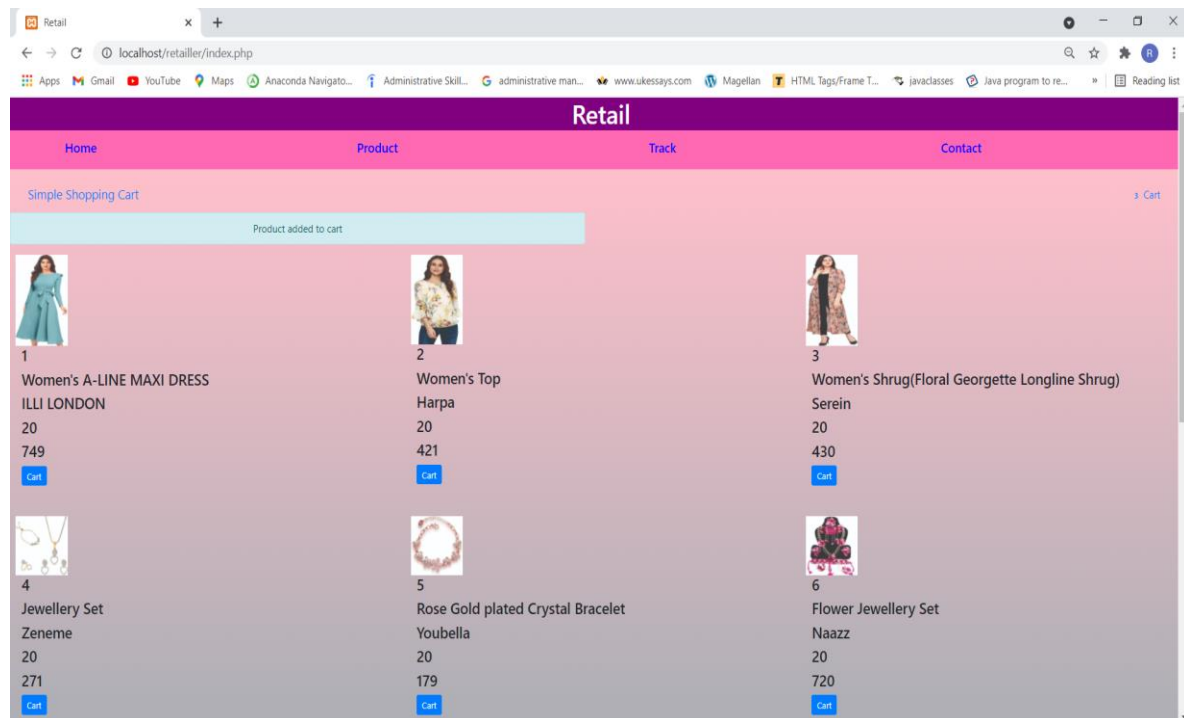

❖ view_cart.php



The screenshot shows a web browser window with the URL `localhost/retailer/view_cart.php`. The page has a purple header with the word "Retail" and a pink navigation bar with links: Home, Product, Track, and Contact. Below the navigation bar, there's a section titled "Simple Shopping Cart" with a "Cart" icon showing 3 items. The main content area is titled "Cart Details" and contains a table with the following items:

Button	Name	Price	Quantity	Subtotal
	Women's A-LINE MAXI DRESS	749.00	1	749.00
	Women's Top	421.00	1	421.00
	Women's Shrug(Floral Georgette Longline Shrug)	430.00	1	430.00
				Total 1,600.00

Below the table are four buttons: Back, Save Changes, Clear Cart, and Checkout. Below these buttons is an "Order" section with four input fields: Old, Cid, Pid, and Cost.

The screenshot shows the same web browser window, but the page content is mostly obscured by a large, semi-transparent blue overlay. The only visible part is a form for entering shipping addresses. It has two input fields: "Enter Source Address" and "Enter Destination Address", each with a "Source" or "Destination" label. Below these fields is a "Submit" button. At the bottom of the page, there is a purple footer with the text "©Copyrights Reserved".

❖ delete_item.php

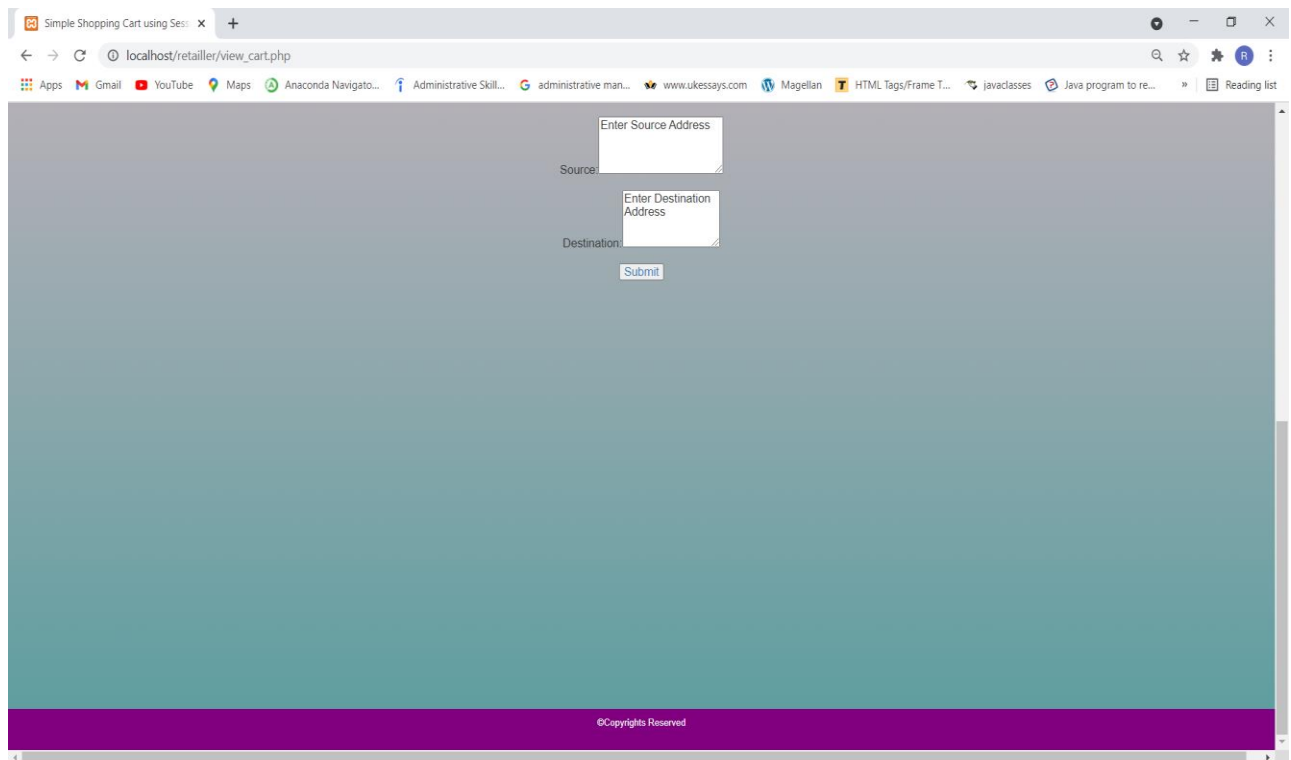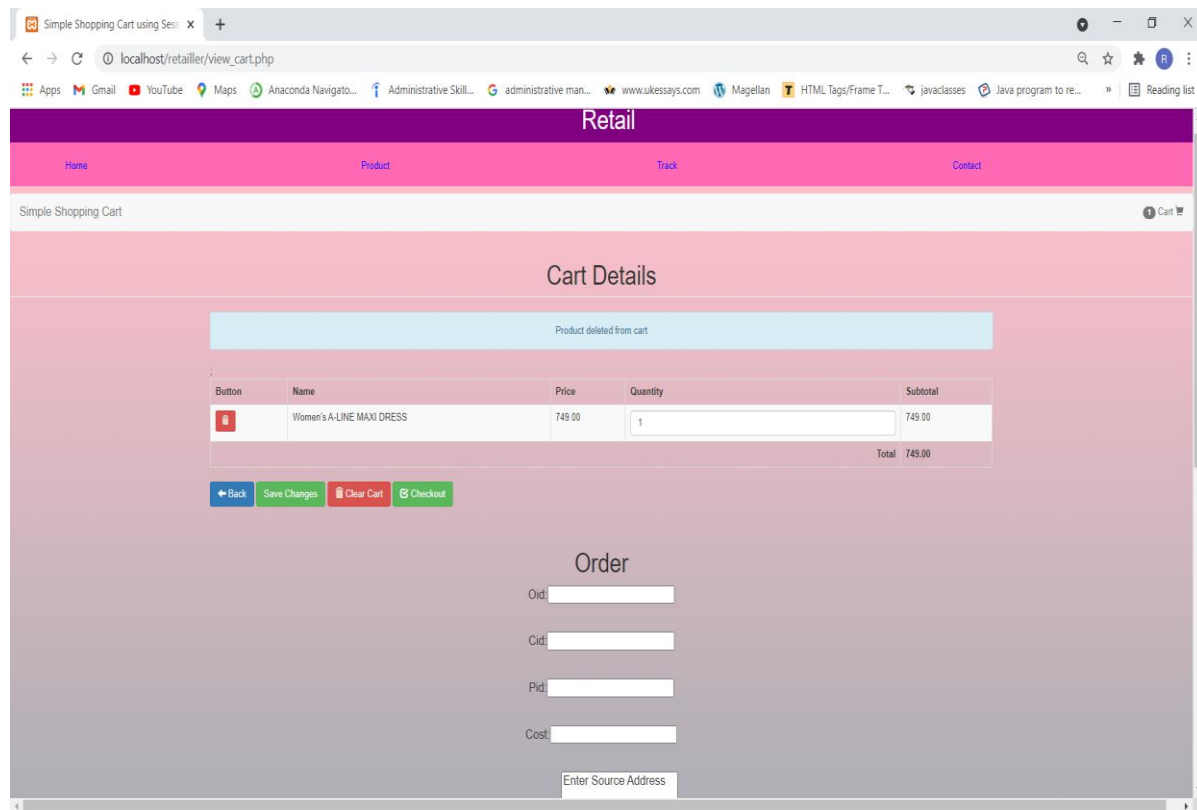

❖ save_cart.php

Simple Shopping Cart using Sessions

localhost/retailer/view_cart.php

Home Product Track Contact

Simple Shopping Cart

Cart Details

Cart updated successfully

Button	Name	Price	Quantity	Subtotal
	Women's A-LINE MAXI DRESS	749.00	2	1,498.00
				Total: 1,498.00

[Back](#) [Save Changes](#) [Clear Cart](#) [Checkout](#)

Order

Old:

Cid:

Pid:

Cost:

Simple Shopping Cart using Sessions

localhost/retailer/view_cart.php

Home Product Track Contact

Order

Enter Source Address

Source:

Enter Destination Address

Destination:

[Submit](#)

©Copyrights Reserved

❖ Track.php

Simple Shopping Cart using Sess: x localhost / 127.0.0.1 / retailer / x +

localhost/retailer/view_cart.php

Apps Gmail YouTube Maps Anaconda Navigato... Administrative Skill... administrative man... www.ukessays.com Magellan HTML Tags/Frame T... javadoc Java program to re... Reading list

Retail

Home Product Track Contact

Simple Shopping Cart

Cart Details

Cart updated successfully

Button	Name	Price	Quantity	Subtotal
	Women's A-LINE MAXI DRESS	749.00	2	1,498.00
Total				1,498.00

[Back](#) [Save Changes](#) [Clear Cart](#) [Checkout](#)

Order

Old: 1

Cid: 1

Pid: 1

Cost: 1498

WZ-622 St-9 Ramgarh Colony ND-110015

Simple Shopping Cart using Sess: x localhost / 127.0.0.1 / retailer / x +

localhost/retailer/view_cart.php

Apps Gmail YouTube Maps Anaconda Navigato... Administrative Skill... administrative man... www.ukessays.com Magellan HTML Tags/Frame T... javadoc Java program to re... Reading list

Retail

Home Product Track Contact

Simple Shopping Cart

Track

Source: WZ-622 St-9 Ramgarh Colony ND-110015

Destination: Sec-3 Rohini, ND-110058

[Submit](#)

©Copyrights Reserved

Furniture Store

localhost / 127.0.0.1 / retailer /

+

localhost/retailer/Track.php

AppsGmailYouTubeMapsAnaconda Navigato...Administrative Skill...administrative man...www.ukessays.comMagellanHTML Tags/Frame T...javaclasesJava program to re...Reading list

Retail

Home

Product

Track Product



Contact

Track Products

Oid	pid	cid	cost	Source	Destination
1	1	1	1498	WZ-622,St-9,Ramgarh Colony ND-110015	Sec-3,Rohini,ND-110058

©Copyrights Reserved

❖ clear_cart.php

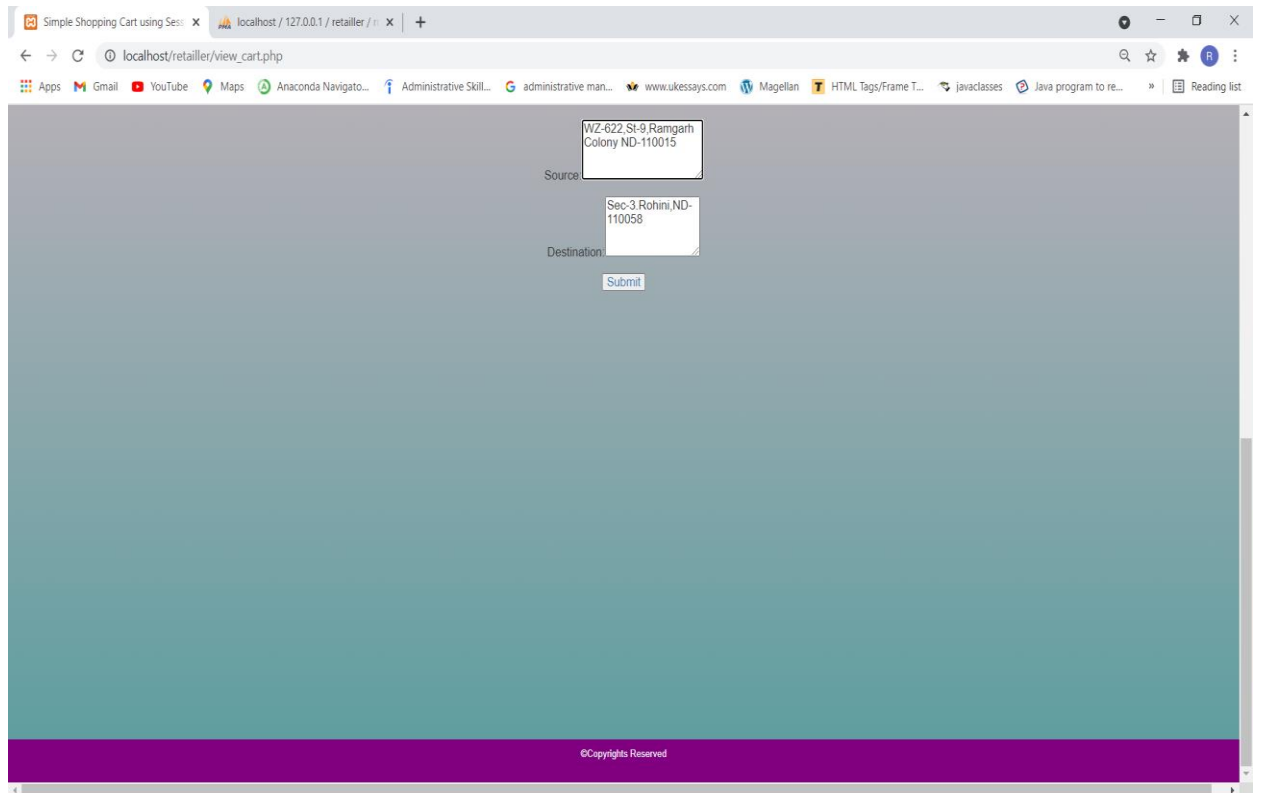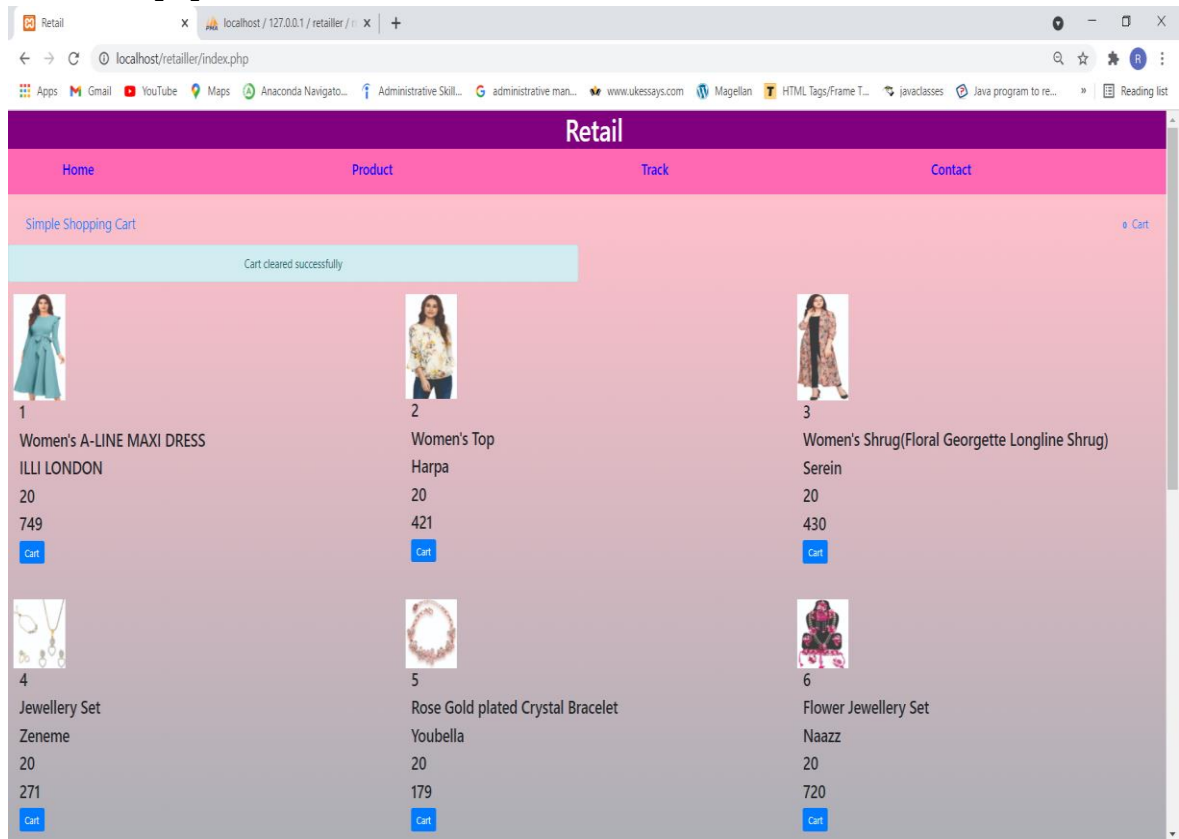

❖ checkout.php

Retail

Home Reatiller Customer Contact

Login

Cid

Cpass

Login

Register

Cid

Cname

Cemail

Cadd

Ccontact

Cpass

Register

©Copyrights Reserved

❖ Contact.html

Retail

Home Reatiller Customer Contact

Map showing the location of Retail Pvt Ltd. in Ramgarh Colony, New Delhi.

Retail Pvt Ltd.
Address-WZ-622, St-9, Ramgarh Colony, New Delhi-110015
Customer Care: 7982909087
E-mail : retail@sales.in

©Copyrights Reserved

LIMITATIONS OF THE PROJECT

This project has some limitations. Some of the limitations include-

- It have a limited products of different categories.
- It does not have all the options of payment. Customer can only track the order and can pay through cash only(i.e., COD) after the delivery of the product. The other options of payment like Paytm, Credit Card, Debit Card etc. are not available.
- This project does not have features by which user can set price ranges for products and receive alerts once the price reaches the particular range.
- It does not include the map to track the location of products.

Future Scope

The following things will be done in future to improve the project:-

- There will be unlimited products of different categories.
- It will include all the options of payment like debit card, credit card, paytm etc so that user can choose any mode of payment for delivery of products.
- The users could subscribe for price alerts which would enable them to receive messages when price for products fall below a particular level.
- The feature of map will be available which will display the exact location and the time taken to reach the product to the destination so that it will be easy for the user to track the product.

Bibliography

- www.google.com
- www.w3schools.com