


Graph reasoning paradigms: where failures occur


Prompt-based and tool-based methods access graph knowledge, but expose different control and verification gaps

A Direct prompting

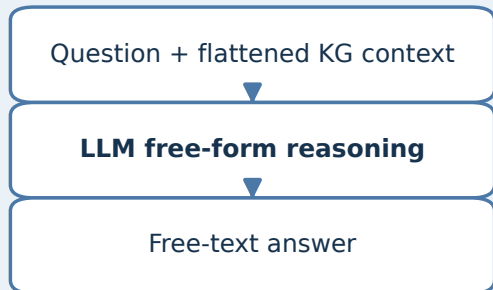


- Structure diluted in text
- Context truncation / prompt sensitivity
- Hallucinated joins or parametric recall
- Answer is not forced through execution

B Iterative tool agent

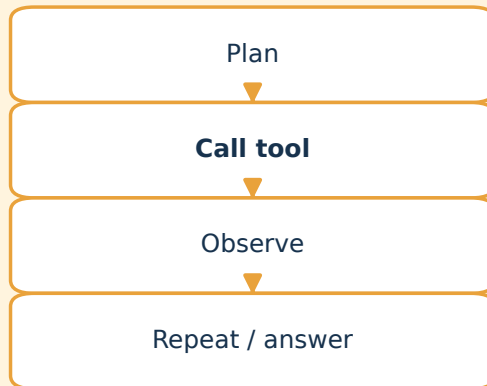

- Latency and cost grow with steps
- Invalid calls and early-error propagation
- Variable-length, framework-coupled traces
- Sparse or ambiguous credit assignment

C GraphTask executable interface

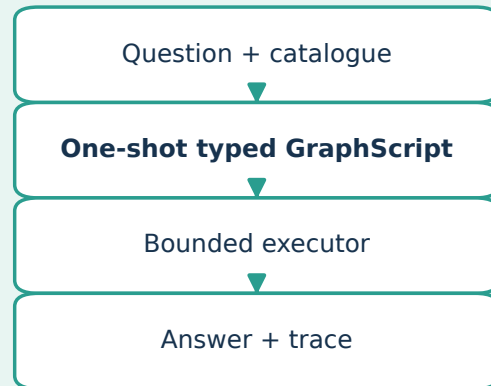

- Schema and relation whitelist
- Operator / edge / return budgets
- Execution-derived answer
- Structured rejection and replayable trace

Design target: a verifiable, bounded and replayable interface between language generation and graph execution