

Three Results in Distributed Discovery

Roles, Disclosure, and Source Dependence

Yohei Nakajima
Untapped Capital

July 2026

Abstract

Collective search depends on more than the quality of a shared ranking. It also depends on who is assigned to test what, which strategic outcome is selected, and whether nominally separate reports arise from distinct sources. We synthesize three finite results around those margins. First, ex-ante role policies can improve discovery without communication: at $(M, N, p) = (3, 2, 2/5)$ a hybrid policy attains $7/10$, strictly above direct clue-following $16/25$, and a restricted family has exact territorial-hybrid-direct thresholds. Second, in a complete deterministic disclosure fixture, one Blackwell refinement lowers discovery under the declared anonymous-symmetric selection from $5/9$ to $171/308$, even though every pure equilibrium and the planner improve. Third, among 51 nonisomorphic latent-source graphs, complete pairwise report moments yield a bounded null, while the average pair-agreement scalar is insufficient: two networks both have agreement $3/4$ but discovery $8/9$ and $31/36$. We connect these results through a common information-action framework and preserve their distinct evidence boundaries. For the canonical private-team fixture, an alignment-preserving exact relaxation also meets the direct-policy lower bound, proving direct clue-following globally optimal without communication. The paper makes no claim of a new field or universal law.

Keywords: collective search, team decision, information design, source dependence, equilibrium selection, distributed discovery.

Evidence note: All displayed numerics and generated figures are derived from checksum-validated immutable runs. Claim IDs refer to the public repository ledger; exactness and independence are claim-specific.

1 Introduction

Many organizations use the language of “the best answer” even when their operational task is to allocate several attempts. A research group chooses a portfolio of experiments, a venture fund chooses investments, and a multi-agent system chooses investigations or tool calls. In each case evidence ranks candidates, but discovery depends on the union of actions rather than the quality of a single recommendation. The Shared Discovery Paradox isolates this difference: pooling improves the leading recommendation, yet a one-answer convention can compress several actions into repetition and reduce discovery [Nakajima, 2026].

The broader program calls this conversion from dispersed evidence into a finite action portfolio *distributed discovery*. The name is a working definition, not a novelty or ownership claim. The phrase has other uses, and the component questions belong to established literatures: Blackwell comparison and persuasion for information, team theory for private common-payoff decisions, organizational and scientific search for division of effort, and coverage games for strategic action allocation [Blackwell, 1953, Marschak and Radner, 1972,

Kamenica and Gentzkow, 2011, March, 1991, Kitcher, 1990, Vetta, 2002]. The contribution here is to place three finite results in one explicit architecture while retaining their separate scopes.

The first result concerns *roles*. Agents commit to different mappings from private clues to actions before seeing those clues and act without communication. Direct clue-following is feasible but need not be optimal. A constant territory can reserve a candidate while another agent remains responsive to evidence. This mechanism is allocative: no new signal is created, and no report is pooled at action time.

The second result concerns *selection*. A public disclosure changes posterior games played by autonomous searchers. More informative disclosure expands what a planner can do, but a named equilibrium-selection rule can move toward a more concentrated outcome. The finite reversal below is therefore related in spirit to informational Braess effects, not to a failure of frontier monotonicity [Acemoglu et al., 2018]. Its central qualifier is that all pure equilibria improve for the same witness.

The third result concerns *representation*. Correlated reports may come from latent source networks. One scalar summary of agreement can hide discovery- relevant structure, yet even a complete pairwise moment matrix can fail to distinguish nonisomorphic networks without changing discovery in a bounded class. The positive counterexample and negative search result are both informative: one refutes a scalar diagnostic, while the other records where a stronger diagnostic did not fail.

These mechanisms should not be collapsed into a slogan that “diversity is good” or “more information is bad.” Roles change the feasible private policy class; disclosure changes a posterior game and its selected equilibrium; source networks change the joint evidence law. Our unifying statement is narrower: collective discovery depends not only on what agents know, but on how roles are assigned, how strategic outcomes are selected, and how source dependence is represented.

The remainder defines the common accounting and evidence discipline, presents the three results, draws their limited joint implications, and states the unresolved questions. The canonical upstream paper remains the concise source for the atomic paradox and its strategic/scaling results. The Foundations note remains the source for the general vocabulary. This paper is a results synthesis, not a replacement for either.

2 Framework and evidence discipline

2.1 Information and action as separate objects

An atomic discovery problem has a target $\theta \in \{1, \dots, M\}$ and N actions. If S is the set of distinct tested labels, discovery is $\mathbf{1}\{\theta \in S\}$. An information architecture specifies which evidence each decision maker observes. A protocol maps that information to a feasible action vector. With budget B , information architecture I , and feasible protocol class $\mathcal{P}_B(I)$, define

$$G_B(\Pi; I) = \mathbb{P}_\Pi(\theta \in S), \quad V_B(I) = \sup_{\Pi \in \mathcal{P}_B(I)} G_B(\Pi; I).$$

Protocol loss is $L_B(\Pi; I) = V_B(I) - G_B(\Pi; I)$, hence

$$G_B(\Pi; I) = V_B(I) - L_B(\Pi; I).$$

This is an accounting identity (DD-C-0002), not an efficiency theorem. Its use is to prevent a comparison that changes information, authority, equilibrium selection, and source dependence simultaneously from being assigned to only one cause.

Frontier monotonicity requires emulation. If every protocol feasible under I_1 can be implemented under

I_2 with the same outcome distribution, then $V_B(I_2) \geq V_B(I_1)$ (DD-C-0016). The condition is stronger than saying that one realized protocol sees more information. A richer public signal can change a game and its selected outcome even when the planner frontier rises. This distinction is the hinge between the disclosure result and Blackwell’s decision-theoretic order [Blackwell, 1953, Kamenica and Gentzkow, 2011].

2.2 Three institutional margins

The results occupy different cells of an information–authority matrix. A private team chooses role policies ex ante, observes only local signals at action time, and shares a common discovery objective. A disclosure game gives all agents a public posterior but leaves actions strategic under an equal-split reward. A source network changes how private reports are jointly generated while holding the direct action rule fixed. These are not three algorithms for the same feasible set; each changes a different primitive.

For the private team, ex-ante randomization cannot improve the finite common-payoff optimum (DD-C-0018). Drawing contingent actions before signals produces a mixture over deterministic profiles, and expected discovery is a convex combination of their values. This is a team-decision sufficiency result, not purification of a strategic mixed equilibrium [Marschak and Radner, 1972].

A pooled planner provides an important but carefully scoped comparator. It observes every private report and can apply any fixed role policy to reproduce the team’s action vector. Conditional on the reports, an eight-label top-posterior portfolio weakly dominates any emulated multiset. Thus direct clue-following is a lower bound and the pooled frontier is an upper bound under matched physical actions and objective (DD-C-0019). The comparison crosses information and assignment margins; it is a valid feasible-set bound, not an attainable private policy.

2.3 Claim-level evidence

The numerical and mathematical objects below do not share one evidence status. A theorem can be derived analytically and audited computationally. A finite enumeration can be exact without supporting an all-parameter theorem. A selected equilibrium reversal can be verified while remaining selection-dependent. A failed exhaustive search over a declared finite class is a bounded null, not a general sufficiency statement. Table 1 makes these differences visible.

Table 1: Evidence status is attached to each result, not to the paper as a whole.

Object	Evidence	Status	Boundary
Policy-signature theorem	DD-C-0023 theorem	derived	Analytic proof; computation audits implementation.
Hybrid witness 7/10 > 16/25	DD-C-0021 bounded exact	independently reproduced	One finite fixture; refutes general direct optimality.
Disclosure reversal	DD-C-0030 selected exact	verified	Selection-dependent; pure equilibria and planner improve.
Complete pairwise-moment search	DD-C-0033 bounded null	independently reproduced	No counterexample in 51 graphs; no sufficiency theorem.
Canonical private-team optimum	DD-C-0038 exact optimum	independently reproduced	Frozen zero-communication fixture; not an all-parameter theorem.

Source: `claims/claims.yml`; claims: DD-C-0021, DD-C-0023, DD-C-0030, DD-C-0033, DD-C-0038; generator: `distributed_discovery.papers.build_three_results`; input SHA-256 prefix: 4a8abf38b778.

Every computational statement traces to a passing immutable run with a frozen configuration, clean source commit, environment, exact or floating arithmetic basis, termination condition, output checksums, and validation flags. Independent reproduction requires a materially different representation or evaluator, not a second invocation of the same code. Corruption tests establish that certificate checkers actually reject altered evidence. These practices do not replace proof or peer review; they make the boundary of each claim inspectable.

3 Private roles without communication

3.1 The zero-communication team problem

The target is uniform on M labels. Agent i receives clue X_i with

$$\mathbb{P}(X_i = \theta \mid \theta) = p, \quad \mathbb{P}(X_i = x \neq \theta \mid \theta) = q = \frac{1-p}{M-1},$$

independently conditional on θ . Before clues are realized, the team commits to deterministic role policies $f_i : \{1, \dots, M\} \rightarrow \{1, \dots, M\}$. Afterward agent i searches $f_i(X_i)$ without communication. The team frontier is

$$T_N(M, p) = \max_{f_1, \dots, f_N} \mathbb{P}\{\theta \in \{f_1(X_1), \dots, f_N(X_N)\}\}.$$

Direct clue-following uses $f_i(x) = x$. Its value is $1 - (1-p)^N$. A territorial policy ignores clues and reserves a fixed label. Hybrid policies combine both: one role can protect territory while another redirects only selected signals. The objective rewards coverage, so sacrificing some action-level accuracy can improve union success.

For a fixed profile, let $s_i(t) = \mathbb{P}(f_i(X_i) = t \mid \theta = t)$. Conditional independence yields the exact factorization

$$G(f_1, \dots, f_N) = \frac{1}{M} \sum_{t=1}^M \left[1 - \prod_{i=1}^N (1 - s_i(t)) \right].$$

This evaluator is separate from the direct target/signal enumeration used to check winners in the finite grid.

3.2 An exact role counterexample

At $M = 3$, $N = 2$, and $p = 2/5$, direct clue-following gives

$$D(p) = 1 - (1-p)^2 = 2p - p^2 = \frac{16}{25}.$$

The hybrid profile with one constant policy $(0, 0, 0)$ and one rerouting policy $(1, 1, 2)$ gives $7/10$. Exhaustive enumeration of all agent-symmetric policy profiles proves this is the unrestricted deterministic optimum for the fixture; raw direct enumeration and a later signature implementation reproduce it (DD-C-0021, DD-C-0024). The exact gain is $3/50$.

The counterexample has a transparent mechanism. The constant role guarantees an attempt at label zero. The other role follows signals one and two but maps a zero signal to one, avoiding predictable duplication with the territorial agent. It does not show that one fixed territory is always best, that communication is harmful, or that the same profile is optimal at canonical dimensions. It refutes only the general claim that

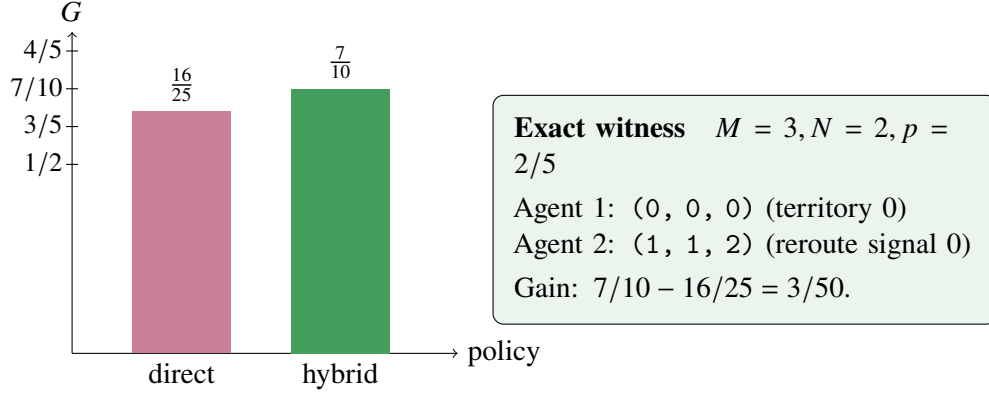


Figure 1: Roles can improve discovery without communication. The bars use the exact unrestricted optimum at the displayed finite fixture; the schematic is one optimal representative.

Source runs: 20260720T200447Z_DD-001_6eb12861_ba766d1eba, 20260720T223829Z_DD-001_b2cc23f4_5e16a90ad1; claims: DD-C-0021, DD-C-0026, DD-C-0027, DD-C-0028; generator: distributed_discovery.papers.build_three_results; input SHA-256 prefixes: e7112e7dd471, 47d933bfc1ae.

every optimal private team follows its clue directly.

3.3 A restricted phase theorem

For $N = 2$ and $M \geq 3$, compare three families: two direct policies; two distinct constant territories; and the one-reroute hybrid above. Their values are

$$D(p) = 2p - p^2, \quad R_M = \frac{2}{M}, \quad H_M(p) = \frac{1 + (M-2)p}{M-1}.$$

Exact factorization of pairwise differences gives the thresholds $p = 1/M$ and $p = 1/(M-1)$ (DD-C-0026). Territorial is best below $1/M$, the hybrid is best between the thresholds, and direct is best above $1/(M-1)$, with adjacent ties at the boundaries. This is a theorem within the three named families for every $M \geq 3$.

The restriction matters. A complete signature-polynomial census certifies that the same hybrid-then-direct envelope is unrestricted over the continuous informative interval $[1/M, 1]$ for $M = 3, 4, 5$ (DD-C-0027). The computation checks 438,734 feasible signature multisets with exact quadratic nonnegativity at endpoints and interior vertices. It does not prove the envelope for all M .

Nor does the informative classification extend to every p . At $p = 0$, exact unrestricted optima are $11/12$ for $M = 3$ and $2/3$ for $M = 4$, strictly above the three-family benchmarks $2/3$ and $1/2$ (DD-C-0028). These anti-informative counterexamples show why a phase diagram needs an explicit parameter domain.

3.4 Lossless policy signatures

Raw policies number M^M per agent. A policy can nevertheless be compressed without changing any fixed-profile value. For target t , let $c_i(t)$ be the number of signals mapped to t , and let $d_i(t)$ indicate whether signal t is a fixed point. Then

$$s_i(t) = qc_i(t) + (p - q)d_i(t).$$

The targetwise pairs $(c_i(t), d_i(t))$ therefore determine the full conditional success vector and every profile objective (DD-C-0023).

Feasibility also has an exact characterization. Remove fixed rows and define residual incoming counts $r_t = c_t - d_t$. A duplicated-column bipartite matching exists exactly when local count conditions and the singleton residual Hall bounds hold. A matching implementation reconstructs policies, while a separate closed-form implementation audits feasibility. The signature representation independently reproduces all 21 prior tiny optima and their raw-policy tie counts (DD-C-0024).

The compression does not eliminate the canonical difficulty. At $M = 16$ there are 148,348,284,928 feasible labeled signatures and 5,806 individual target-label orbits. Eight-agent multisets before a global target quotient form an 85-digit state count (DD-C-0025). Canonicalizing each agent separately loses relative target alignment, which enters the product of failure probabilities. The barrier is not a proof that exact optimization is impossible; it identifies what a valid next quotient or relaxation must preserve.

3.5 The exact canonical optimum

For $(M, N, p) = (16, 8, 1/5)$, direct clue-following is feasible and has exact value

$$1 - (4/5)^8 = \frac{325089}{390625} = 0.83222784.$$

The direct profile is an exact coordinate fixed point, and 17 additional declared starts converged to the same value (DD-C-0022). Those searches alone were only heuristic lower-bound evidence. The new proof instead retains the aligned vector of incoming policy counts across all agents inside each target column. It lower-bounds each local failure factor, exactly minimizes their product by column resource, and then relaxes only cross-target feasibility while preserving the globally necessary incoming-count total (DD-C-0037).

The resulting exact Bellman certificate assigns resource eight to each of the sixteen targets and lower-bounds average failure by $(4/5)^8$. Hence

$$T_8(16, 1/5) = \frac{325089}{390625} = 0.83222784.$$

The upper bound meets the attainable direct value, proving global optimality for deterministic teams. An ex-ante randomized policy is a mixture of deterministic profiles, so the randomized optimum is identical (DD-C-0038). A separate verifier checks every Bellman inequality and equality witness without optimizing and rejects a corrupted final value. The former pooled upper endpoint remains a valid organizational benchmark, but its exact gap has now been closed for this frozen private-team problem.

4 Information disclosure under strategic search

4.1 A complete bounded fixture

The disclosure result holds information and the physical action technology apart from strategic selection. There are three target actions, two searchers, four evidence states, and a fixed rational likelihood matrix. A deterministic public disclosure policy is a set partition of the four evidence states, considered up to message-label equivalence. The Bell number gives exactly 15 policies. Across their messages the run evaluates 37 posterior games (DD-C-0029).

Agents compete for an equal-split prize: being the sole correct searcher receives the whole prize, while duplicate correct searches split it. For each posterior game, the computation exhausts labeled pure best

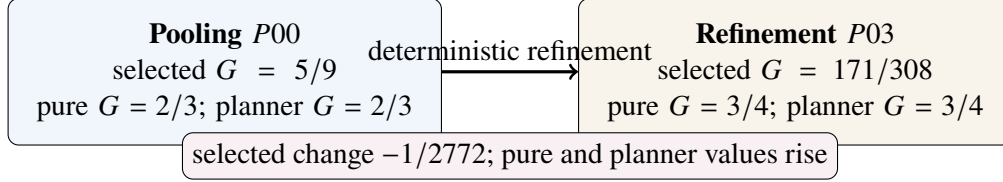


Figure 2: The bounded disclosure reversal is selection-dependent. The selected anonymous-symmetric outcome falls, whereas every pure-equilibrium value and the two-action planner value rise for the same witness.

Source runs: 20260720T225848Z_DD-002_94607423_e29b1460ae; claims: DD-C-0029, DD-C-0030, DD-C-0031; generator: distributed_discovery.papers.build_three_results; input SHA-256 prefixes: ff32fc8cb5cb.

responses and calculates the anonymous symmetric equilibrium over its support. Cartesian products across messages yield 256 global pure-equilibrium selections. This registry keeps the correspondence separate from the named symmetric selection.

A disclosure π' is more informative than π when a deterministic garbling maps messages of π' to those of π . The complete partition lattice contains 45 strict refinement pairs. The planner's two-action value is the posterior mass of its two highest-probability targets and therefore cannot fall under a refinement when it can ignore the added message detail.

4.2 The selected reversal

The unique anonymous-symmetric reversal refines full pooling $\{\{0, 1, 2, 3\}\}$ into $\{\{0, 1\}, \{2, 3\}\}$. Under pooling the selected discovery is $5/9$. Under refinement it is the probability-weighted value $171/308$, lower by $1/2772$ (DD-C-0030).

The qualification is central. Every pure-equilibrium discovery value rises from $2/3$ to $3/4$ for this witness. The two-action planner value also rises from $2/3$ to $3/4$. The refinement therefore does not make every equilibrium worse, does not reduce the feasible information frontier, and does not show that public information is intrinsically harmful. It changes the declared anonymous-symmetric outcome in a direction that concentrates strategic search.

The witness is informational-Braess-like because information modifies equilibrium behavior, while a coordinator could discard the added detail or choose a better portfolio [Acemoglu et al., 2018]. It is also narrower than a Bayesian-persuasion claim: the disclosure policy is not optimized over randomized experiments, the sender objective is not solved, and the result does not characterize the concave closure of value [Kamenica and Gentzkow, 2011].

4.3 What the full refinement census says

Across all 45 strict deterministic refinements, exactly one lowers the selected anonymous-symmetric value, eight lower the worst pure-equilibrium value, none lower the best pure-equilibrium value, and none lower the planner value (DD-C-0031). Reporting only the selected witness would hide the favorable pure correspondence; reporting only the best equilibrium would hide selection risk. Both summaries are needed.

The census establishes completeness only for the declared four-state partition lattice and likelihood fix-ture. Randomized disclosure was not studied. General asymmetric mixed equilibria were not enumerated. Dynamic learning, equilibrium refinement, and selection by adaptive processes are outside the result. These limits motivate the next DD-002 milestone: apply several explicit selection procedures to the same 45 refinements before expanding the disclosure class.

5 Correlated source networks

5.1 From a copying scalar to provenance graphs

Four searchers observe reports derived from one to three latent sources. A bipartite graph says which source reports each searcher sees; no declared node is isolated. Sources are independent conditional on a three-valued target and have common accuracy $2/3$. A searcher combines adjacent source reports by a declared plurality-winner-set rule with uniform tie sampling, then searches the resulting label directly.

This model turns provenance into a graph rather than a single copying rate. Source and searcher labels are nuisance symmetries, so graphs are equivalent under independent relabeling of the two sides. Exhausting all labeled adjacencies and canonicalizing them yields 1, 8, and 42 nonisomorphic graphs for one, two, and three sources: 51 total (DD-C-0032). An independent orbit traversal reproduces the counts and a pairwise nonisomorphism audit confirms the registry.

For each graph, exact enumeration over target and source-signal states produces private discovery and report moments. The complete pairwise object includes every searcher pair's one-hot report moment matrix, canonicalized only under searcher relabeling. Two networks can have the same scalar mean agreement while differing in this matrix, source overlap, and higher-order dependence.

5.2 A bounded null for complete pairwise moments

The 51-graph census contains ten complete pairwise-moment signatures that each match two nonisomorphic graphs. All twenty graphs in those groups have equal private discovery within their matched group. Thus no complete-pairwise-moment counterexample exists in the configured class (DD-C-0033).

This is a bounded null, not a sufficiency theorem. It says the declared diagnostic survived one complete exact test. A counterexample may appear with heterogeneous source quality, more sources, different aggregation, more searchers, or another target law. Conversely, the null matters operationally because it prevents a failed search from being selectively forgotten and establishes a reproducible baseline for the next perturbation.

5.3 A scalar counterexample

Average pair agreement is much weaker. Graphs K2N4:00011110 and K2N4:01111111 both have mean pair agreement $3/4$, yet their exact private discovery probabilities are $8/9$ and $31/36$, a difference of $1/36$ (DD-C-0034).

The two complete pairwise matrices differ, so the example refutes only the scalar average. The full census has 22 graph pairs with matched average agreement and different discovery. It also has 59 pairs with matched source Herfindahl–Hirschman concentration and different discovery. Neither scalar is a sufficient effective-channel statistic in this model.

The result does not imply that correlation is always harmful. Shared sources may improve individual report quality or coordinate complementary actions in another technology. Nor does it establish a universal effective sample size. Diagnostics must be tied to the target law, aggregation rule, and action objective. Provenance structure can matter beyond nominal report count, but which representation is sufficient remains a model-specific question.

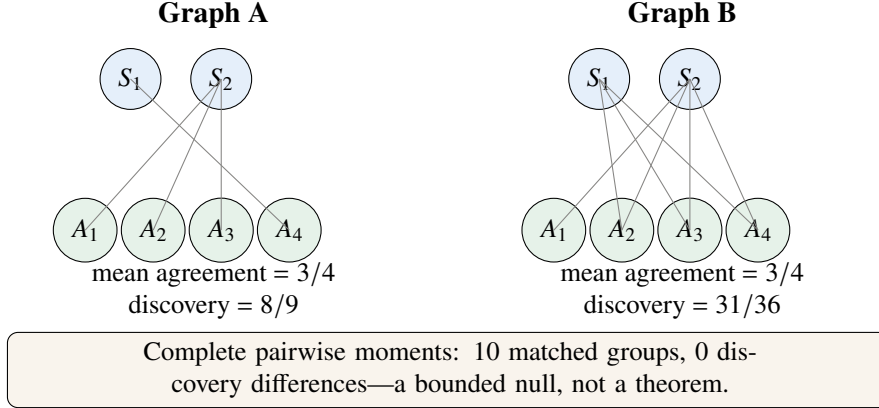


Figure 3: Two nonisomorphic source networks have equal mean pair agreement but different exact private discovery. Their complete pairwise moment matrices differ.

Source runs: 20260720T232223Z_DD-003_2ea8dad5_ae62f6c1f1; claims: DD-C-0032, DD-C-0033, DD-C-0034; generator: distributed_discovery.papers.build_three_results; input SHA-256 prefixes: 92132b3bb641, 1c8675d8697a.

6 Unified implications

The three results share an outcome—union discovery—but operate through different causal and mathematical margins. It is useful to state the mapping exactly:

Study	Primitive changed	Mathematical object	Main boundary
DD-001 roles	ex-ante policy assignment	common-payoff team frontier	canonical optimum exact; other parameters open
DD-002 disclosure	public signal partition	posterior game plus selection	reversal is selection-dependent
DD-003 sources	joint evidence provenance	colored/bipartite source law	pairwise result is a bounded null

First, allocation can substitute partly for communication. The DD-001 hybrid improves coverage using differentiated role mappings while leaving every clue private. The result does not say that information sharing lacks value; the exact pooled planner remains an upper bound. It says assignment has an independent margin that a direct symmetric protocol leaves unused.

Second, information and behavior must be separated. The DD-002 refinement improves the planner and all pure equilibria for its witness while lowering one selected symmetric outcome. A statement that “information reduced discovery” is incomplete without the selection procedure. Frontier monotonicity and realized equilibrium performance can move in different directions.

Third, evidence diversity needs a representation. The DD-003 counterexample shows that a scalar correlation summary can match while discovery differs; the bounded null shows that a richer pairwise object can match while discovery does not differ in the current class. A useful diagnostic must be validated against the downstream action rule, not chosen solely because it resembles a generic effective sample size.

These points support a layered design workflow. Declare the world and evidence kernel; declare what each agent observes; declare the feasible role or assignment class; declare rewards and equilibrium selection; declare how actions cover the target space. Only then compare protocols. A change that bundles those layers may still be useful, but its performance gap should not be given a single causal label.

The scientific-search literature already studies richer dynamic divisions of labor, communication networks, and experiment choice [March, 1991, Kitcher, 1990, Zollman, 2007, Rzhetsky et al., 2015]. Submodular and adaptive search add overlapping value and feedback [Nemhauser et al., 1978, Golovin and Krause, 2011]. Robotic coverage makes redundancy valuable for robustness [Hazon and Kaminka, 2008]. The present finite models are best read as diagnostic building blocks for those settings, not substitutes for them.

7 Limitations

The first limitation is external validity. Every result is mathematical evidence inside a declared model. No observational or experimental dataset establishes that a real scientific group, company, market, or multi-agent system occupies the same parameterization. Application mappings identify measurable primitives; they do not transfer the ordering automatically.

Second, the role results are asymmetric in their strength. The policy-signature identity and residual Hall characterization are general theorems for the finite symmetric clue model. The three-family phase result is general only within its named families. The unrestricted continuous classification is bounded to $M = 3, 4, 5$, and the anti-informative examples are two fixtures. The alignment relaxation upper-bounds all symmetric-report parameters, but is not always tight; its equality with direct clue-following proves the optimum only at the frozen canonical fixture.

Third, the disclosure result fixes deterministic partitions of four evidence states and one equilibrium selection. It does not enumerate randomized disclosure, general asymmetric mixed equilibria, or learning-selected outcomes. Because every pure equilibrium improves for the witness, the phrase “harmful disclosure” must always carry the selection qualifier.

Fourth, the source-network model fixes homogeneous accuracy, source independence conditional on the target, four searchers, one to three sources, and a particular plurality/tie rule. The complete pairwise bounded null may disappear under the first heterogeneity perturbation. The average-agreement and source-HHI counterexamples do not refute all task-specific channel diagnostics.

Fifth, exact enumeration is not equivalent to conceptual independence. The repository requires distinct representations and direct state checks where feasible, but all implementations share the frozen model. A misspecified likelihood, objective, or selection definition could be reproduced perfectly. Proof review and model criticism remain necessary.

Finally, the project makes no broad terminology or field novelty claim (DD-C-0017). Team theory, information design, organizational search, epistemic networks, and coverage games provide direct intellectual ancestry. The value of the synthesis is an inspectable separation of information, roles, selection, and source representation.

8 Research agenda

The immediate DD-001 proof task is complete: the first alignment-preserving count-budget relaxation equals the direct lower bound canonically. The next structural question is when that relaxation is tight. It matches all 21 prior tiny fixtures but is strictly loose at the audited anti-informative $(M, N, p) = (3, 2, 0)$ case. Stronger per-role cross-target consistency can be added as a hierarchy only when a new question requires it.

For DD-002, the next step is selection robustness, not a larger disclosure space. Several fully specified procedures—for example best pure, worst pure, a basin-weighted best-response process, or an explicit

stochastic transition rule— should classify the known witness and all 45 refinements. Randomized disclosure should begin only after that catalogue and a separate ADR define the solution object.

For DD-003, source accuracy should vary before the graph class grows. Two rational source types create colored graphs whose isomorphisms preserve accuracy. Exact colored enumeration can then retest complete pairwise moments, average agreement, source concentration, and discovery. A bounded null should remain a null if no counterexample appears; one controlled expansion is preferable to an unbounded search.

Longer-term work introduces feedback, overlapping coverage, mechanism design, and empirical audits. Sequential search requires a stopping and information-update model; greedy guarantees require submodularity or adaptive submodularity rather than analogy [Nemhauser et al., 1978, Golovin and Krause, 2011]. Mechanism design must specify observability, budget balance, and credit. Empirical work must distinguish descriptive concentration from an identified frontier or protocol-loss estimate.

Across these extensions, the evidence policy should remain constant: preregister the feasible class and stopping rule, estimate the state space before computation, preserve failed and null results, use immutable run identifiers, and promote claims only after every proof, code, run, and test path has been audited.

9 Conclusion

Three finite results expose three distinct ways a collective search can depart from a symmetric direct protocol. Roles can reserve coverage without communication; public disclosure can change a selected strategic outcome even as the planner and pure equilibria improve; source networks can share a scalar agreement level while producing different discovery.

The synthesis is deliberately qualified. The role counterexample is exact but finite. The disclosure reversal is exact but selection-dependent. The complete pairwise source result is a bounded null, while only the scalar counterexample is refutational. The canonical private-team optimum is now exact, but only for the frozen zero-communication dimensions and symmetric signal law.

The shared lesson is architectural rather than universal: collective discovery depends not only on what agents know, but on how roles are assigned, how strategic outcomes are selected, and how source dependence is represented. Making those margins explicit turns an appealing paradox into a sequence of falsifiable, auditable research problems.

References

- Daron Acemoglu, Ali Makhdoumi, Azarakhsh Malekian, and Asuman Ozdaglar. Informational Braess’ paradox: The effect of information on traffic congestion. *Operations Research*, 66(4):893–917, 2018. doi: 10.1287/opre.2017.1712.
- David Blackwell. Equivalent comparisons of experiments. *The Annals of Mathematical Statistics*, 24(2): 265–272, 1953. doi: 10.1214/aoms/1177729032.
- Daniel Golovin and Andreas Krause. Adaptive submodularity: Theory and applications in active learning and stochastic optimization. *Journal of Artificial Intelligence Research*, 42:427–486, 2011. doi: 10.1613/jair.3278.
- Noam Hazon and Gal A. Kaminka. On redundancy, efficiency, and robustness in coverage for multiple robots. *Robotics and Autonomous Systems*, 56(12):1102–1114, 2008. doi: 10.1016/j.robot.2008.01.006.

- Emir Kamenica and Matthew Gentzkow. Bayesian persuasion. *American Economic Review*, 101(6): 2590–2615, 2011. doi: 10.1257/aer.101.6.2590.
- Philip Kitcher. The division of cognitive labor. *The Journal of Philosophy*, 87(1):5–22, 1990. doi: 10.2307/2026796.
- James G. March. Exploration and exploitation in organizational learning. *Organization Science*, 2(1): 71–87, 1991. doi: 10.1287/orsc.2.1.71.
- Jacob Marschak and Roy Radner. *Economic Theory of Teams*. Number 22 in Cowles Foundation Monograph. Yale University Press, New Haven, 1972. URL <https://cowles.yale.edu/research/cfm-22-economic-theory-teams>.
- Yohei Nakajima. The shared discovery paradox: How a one-answer rule turns better information into worse search. Working paper, 2026. URL <https://github.com/yoheinakajima/shared-discovery-paradox>. Canonical source pinned at commit 5025cc8e8f2f8ca015dff2066f08f81ad5715a51.
- George L. Nemhauser, Laurence A. Wolsey, and Marshall L. Fisher. An analysis of approximations for maximizing submodular set functions—I. *Mathematical Programming*, 14(1):265–294, 1978. doi: 10.1007/BF01588971.
- Andrey Rzhetsky, Jacob G. Foster, Ian T. Foster, and James A. Evans. Choosing experiments to accelerate collective discovery. *Proceedings of the National Academy of Sciences*, 112(47):14569–14574, 2015. doi: 10.1073/pnas.1509757112.
- Adrian Vetta. Nash equilibria in competitive societies, with applications to facility location, traffic routing and auctions. In *Proceedings of the 43rd Annual IEEE Symposium on Foundations of Computer Science*, pages 416–425, 2002. doi: 10.1109/SFCS.2002.1181966.
- Kevin J. S. Zollman. The communication structure of epistemic communities. *Philosophy of Science*, 74(5):574–587, 2007. doi: 10.1086/525605.