
P5 Algorithm: GT-Conditioned CVAE — Detailed Flow

Training path (top) and deployment path (bottom); every GT-consuming module is **training-only**.

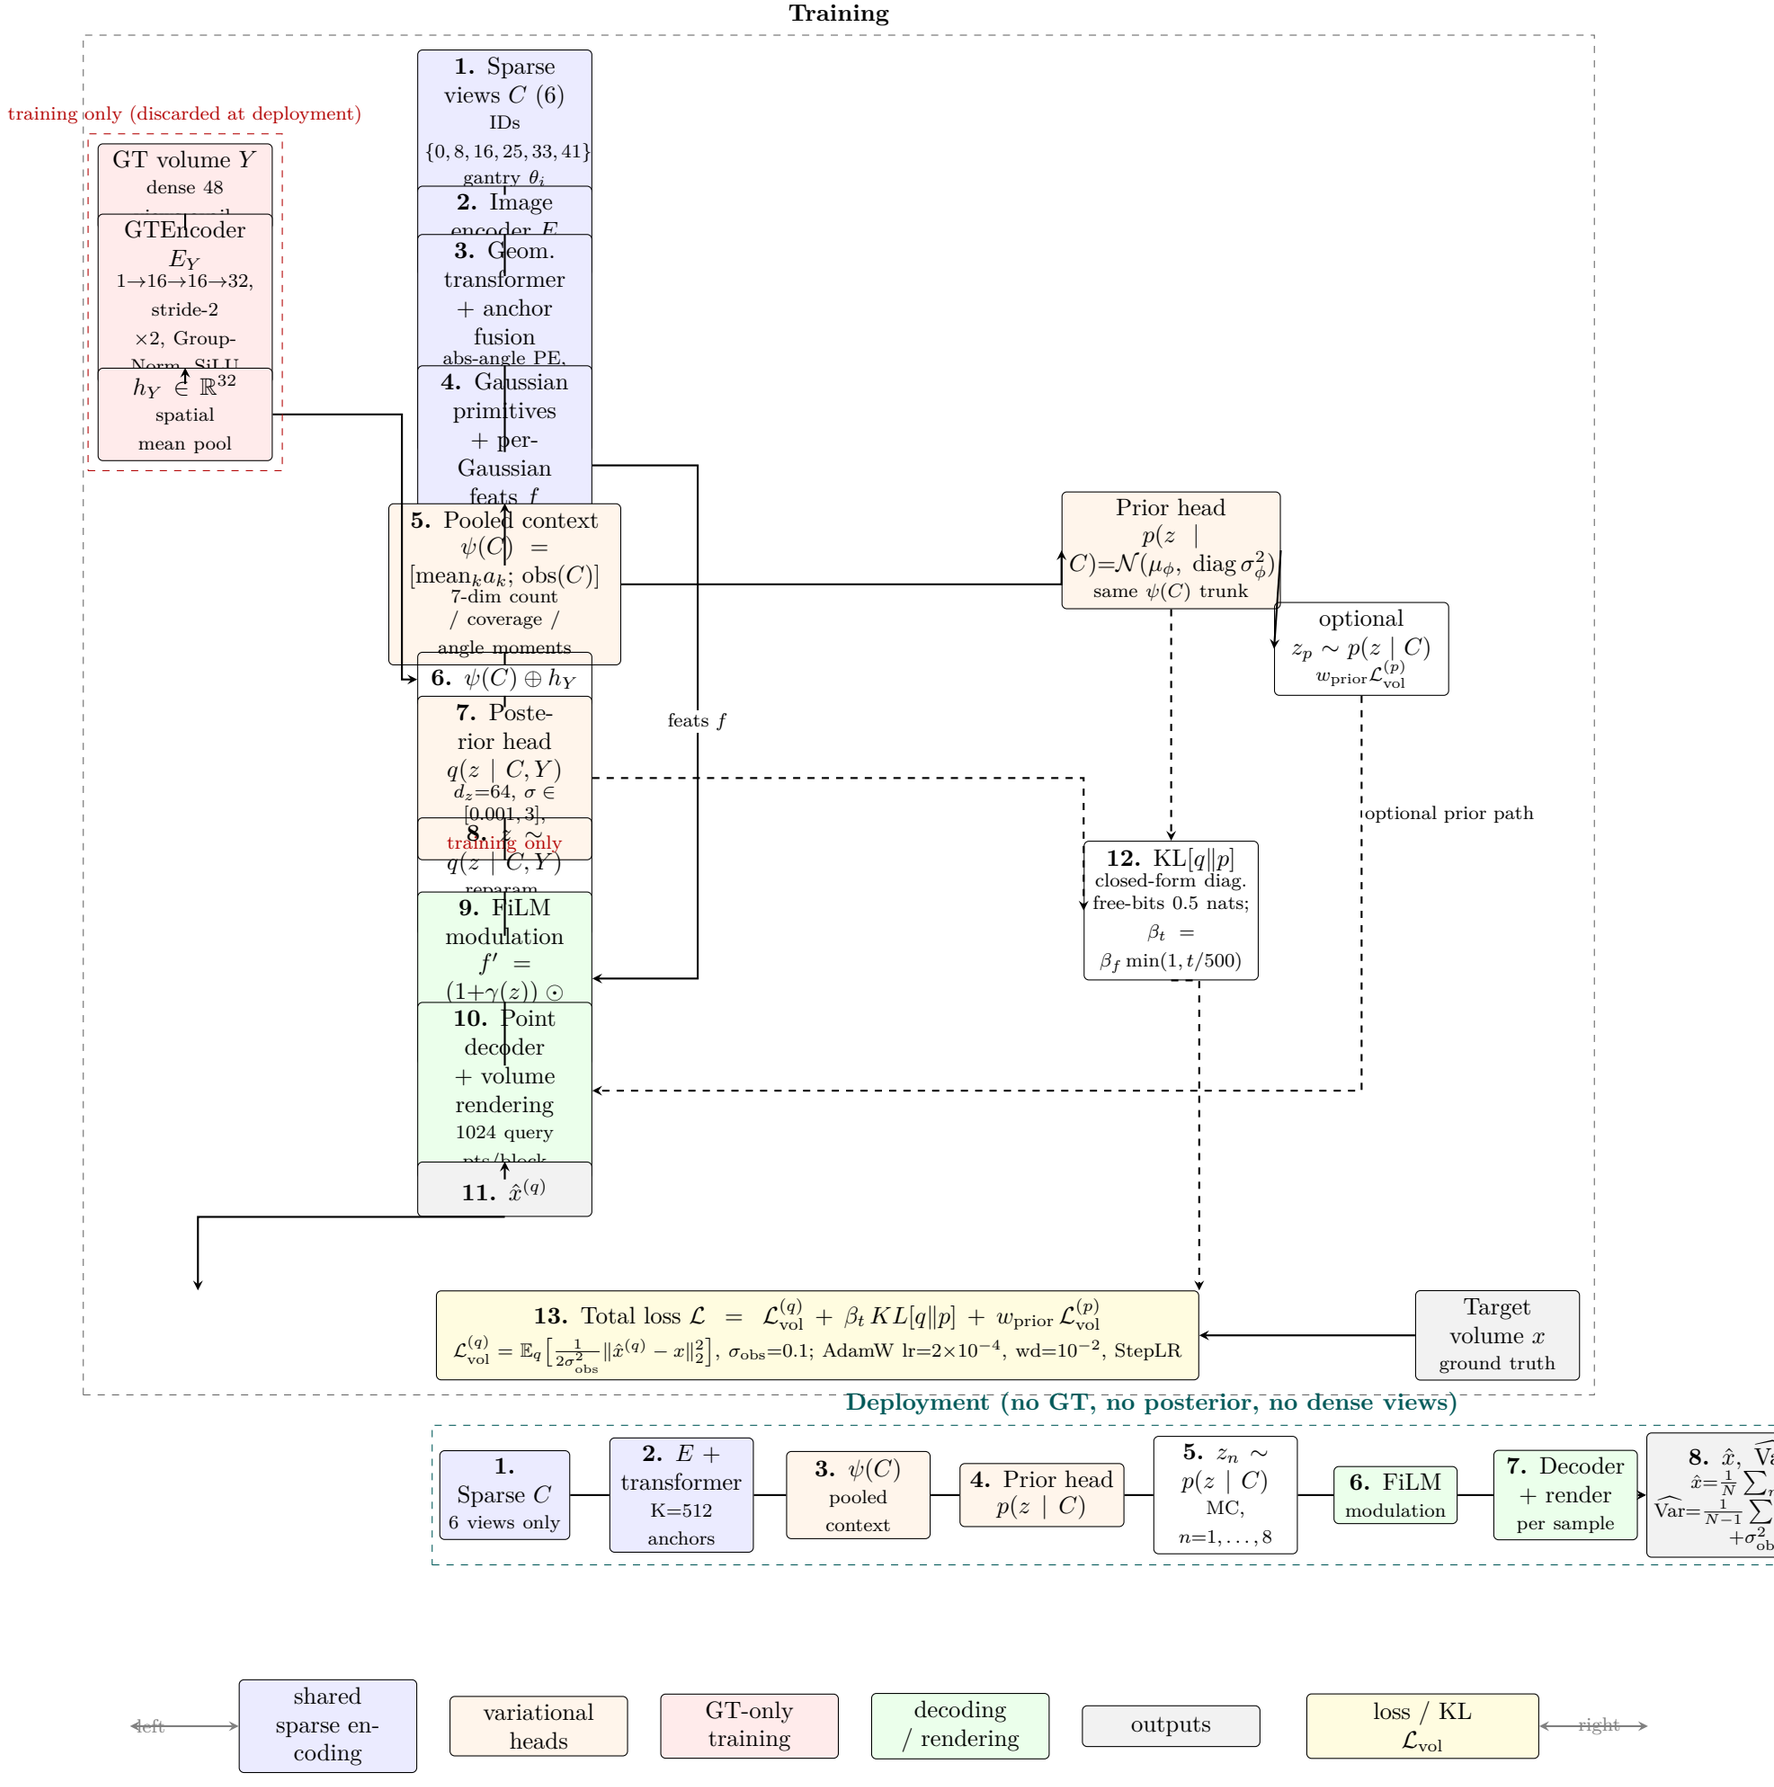

Note: at deployment the GT encoder and the posterior head are never instantiated; the decoder consumes sparse-view context features modulated by $z \sim p(z \mid C)$ exactly as at training.