

ACTIVITY PERTEMUAN 4

NAMA : Yolanda Pangemanan

NPM : 51421536


KELAS : 4IA14

MATA PRAKTIKUM : Rekayasa Perangkat Lunak 2


Screenshot kode dan ouput program!

Program


pom.xml

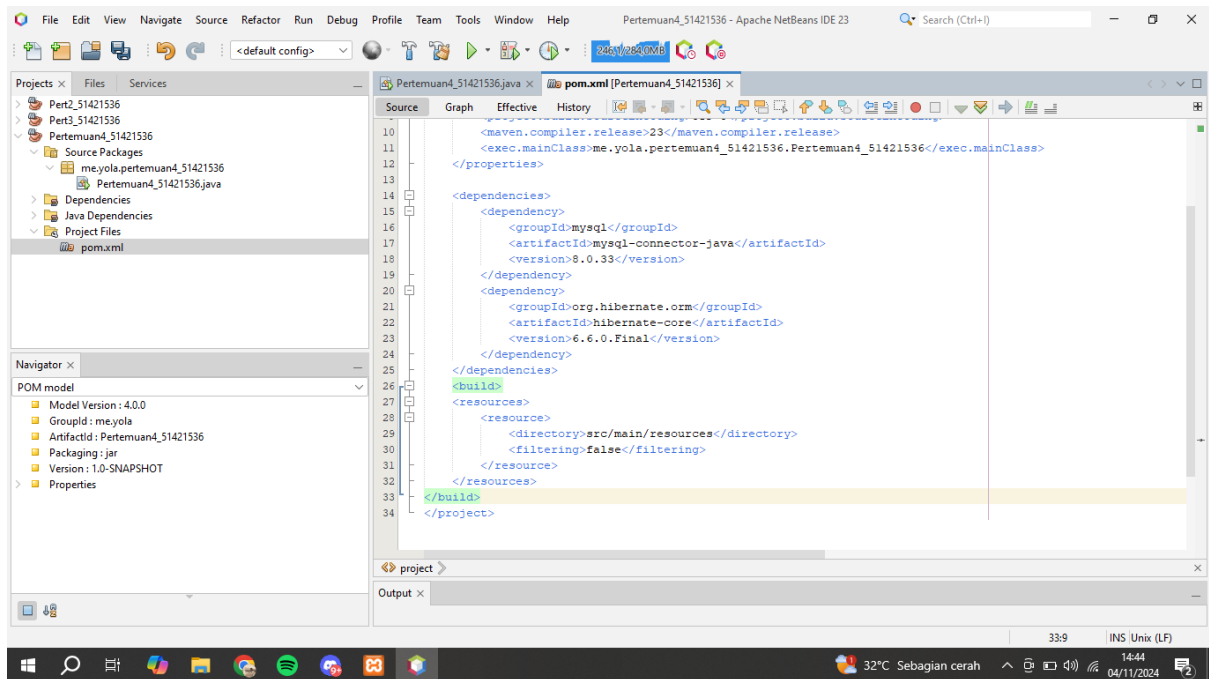


Lalu diclean and build

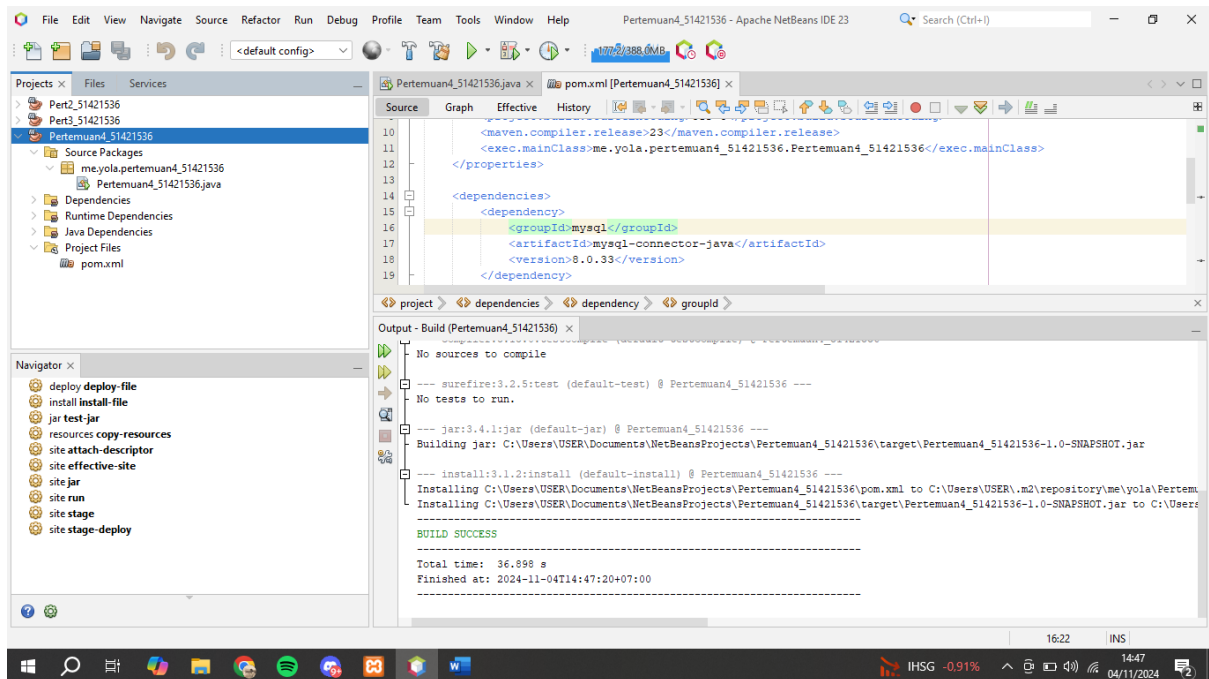


ModelMahasiswa.java

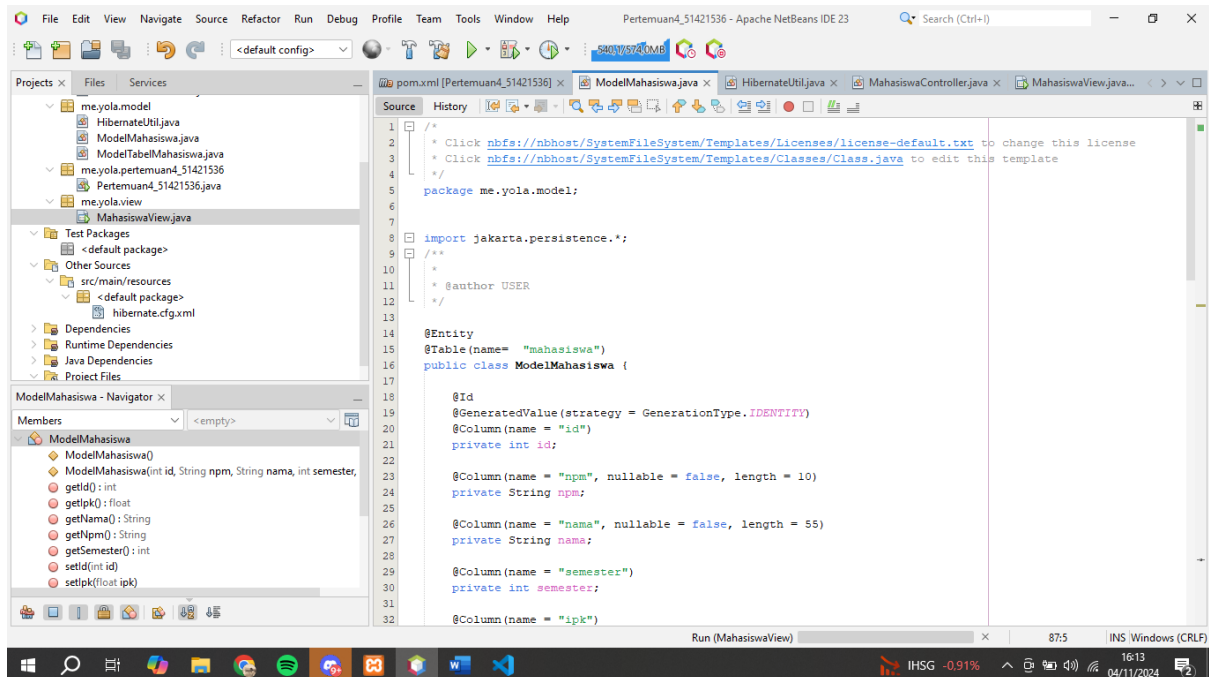



HibernateUtil.java

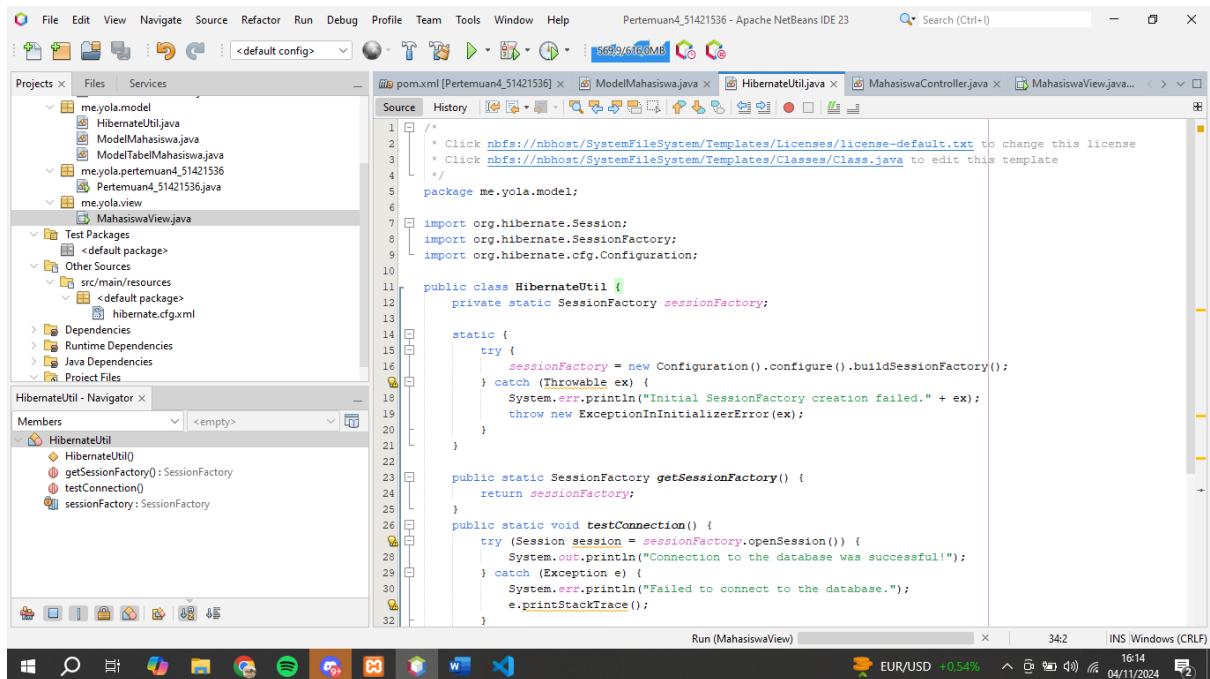


MahasiswaController.java

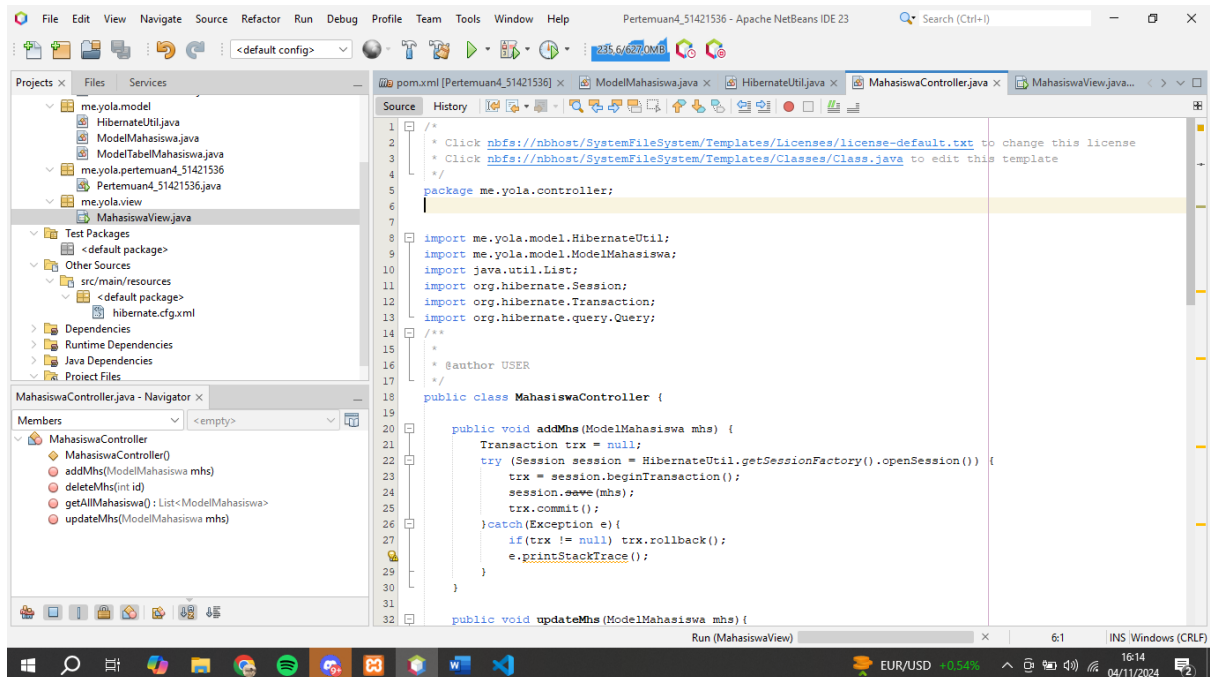


MahasiswaView.java

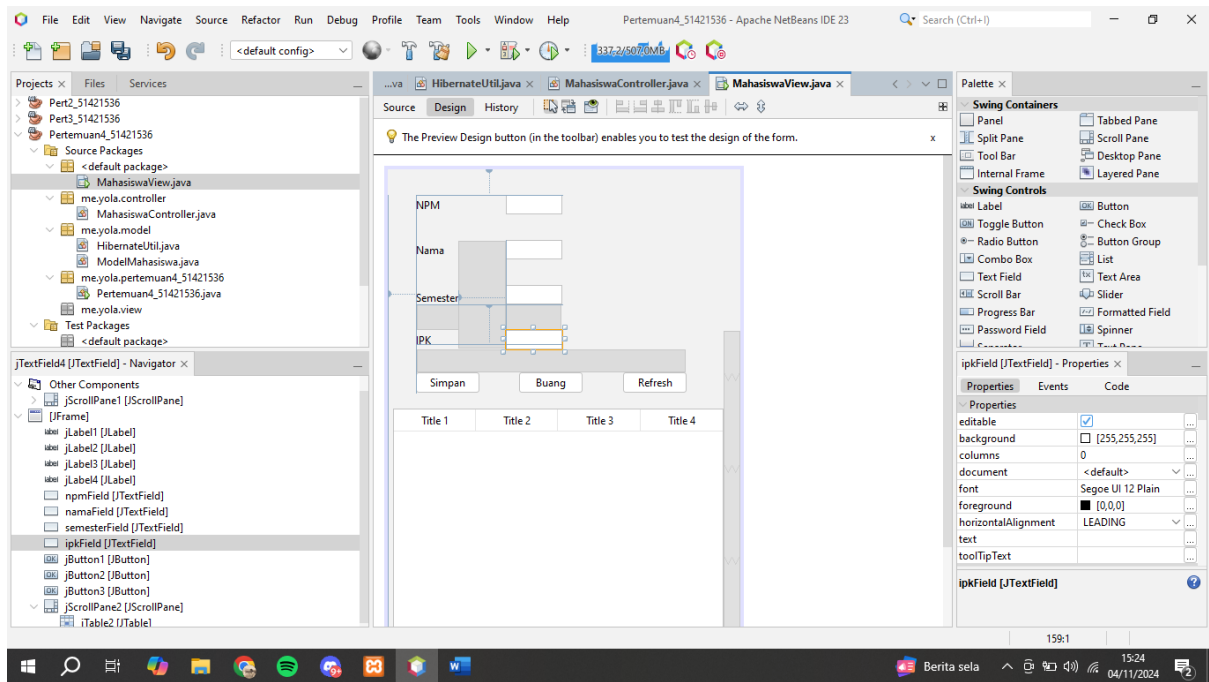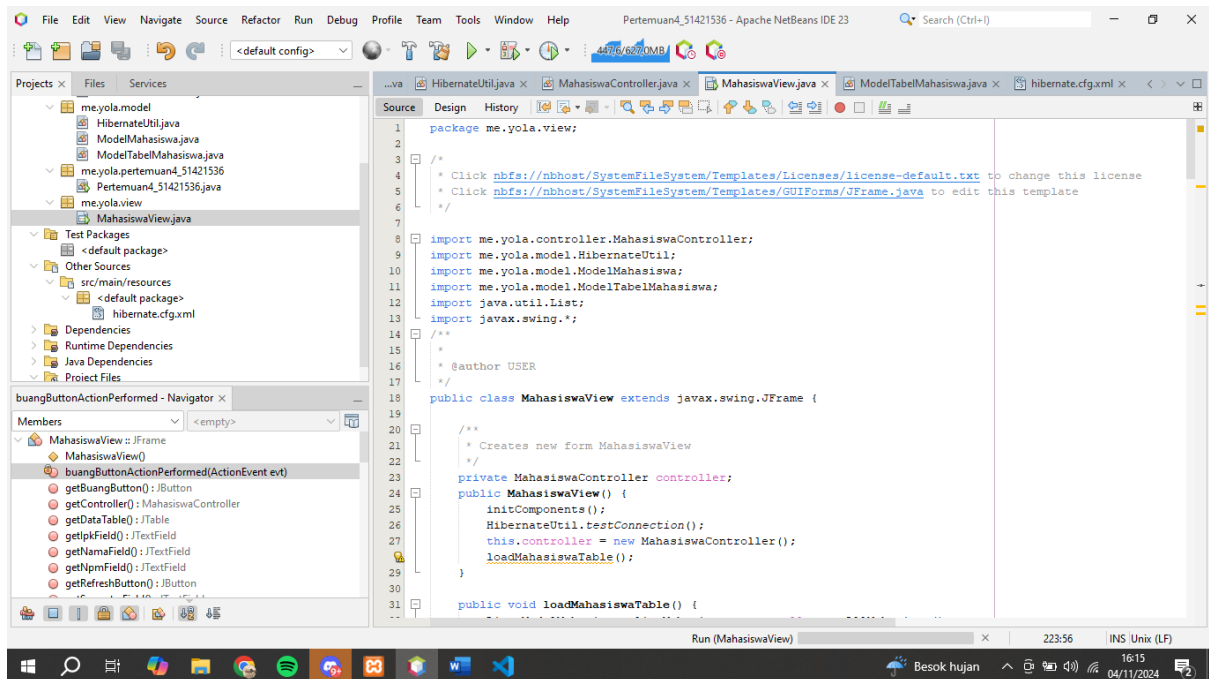

ModelTabelMahasiswa.java

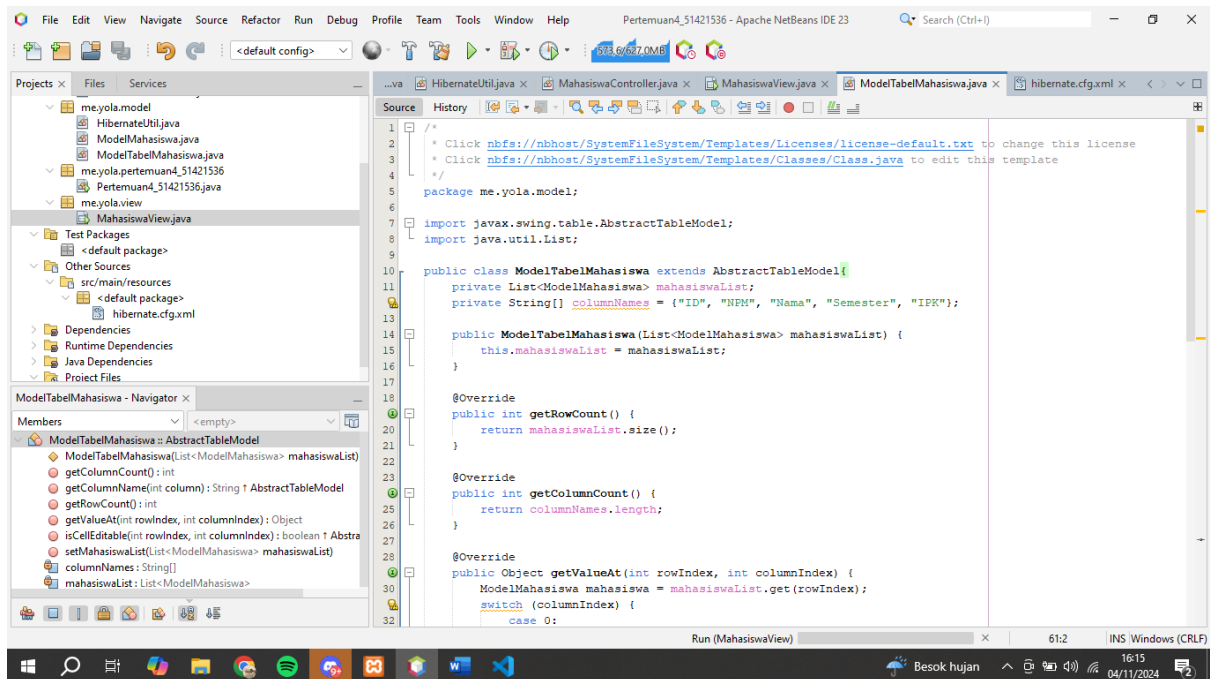


Hibernate.cfg.xml

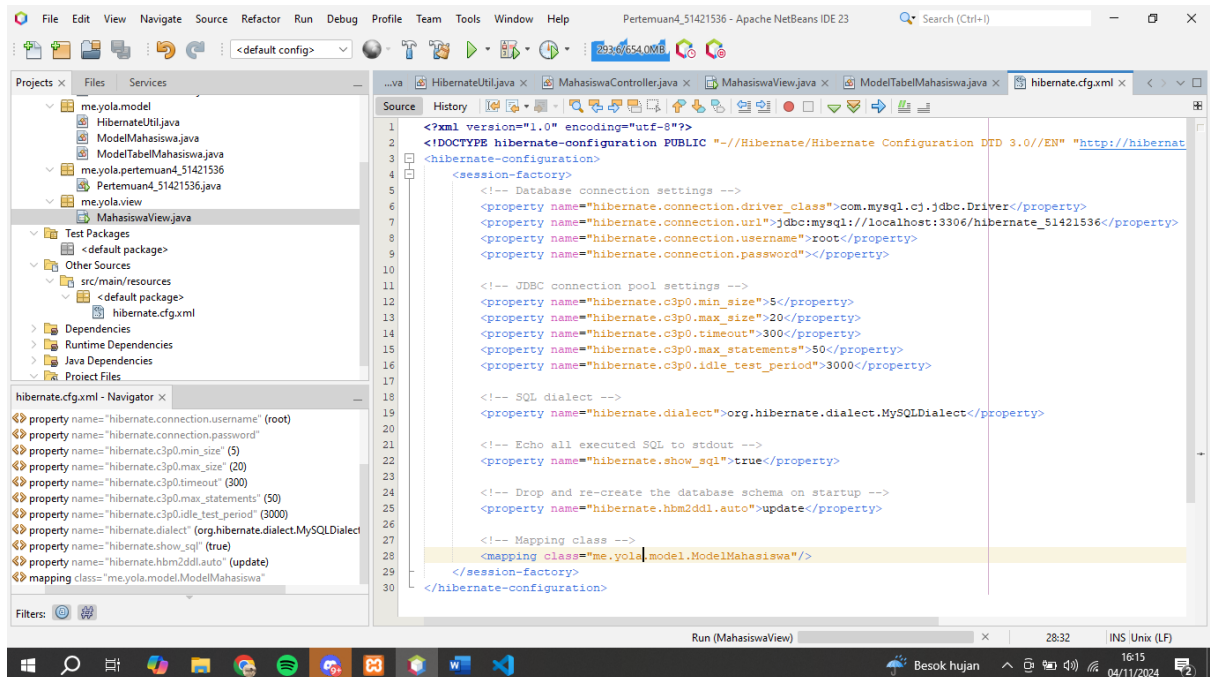

Output


Simpan

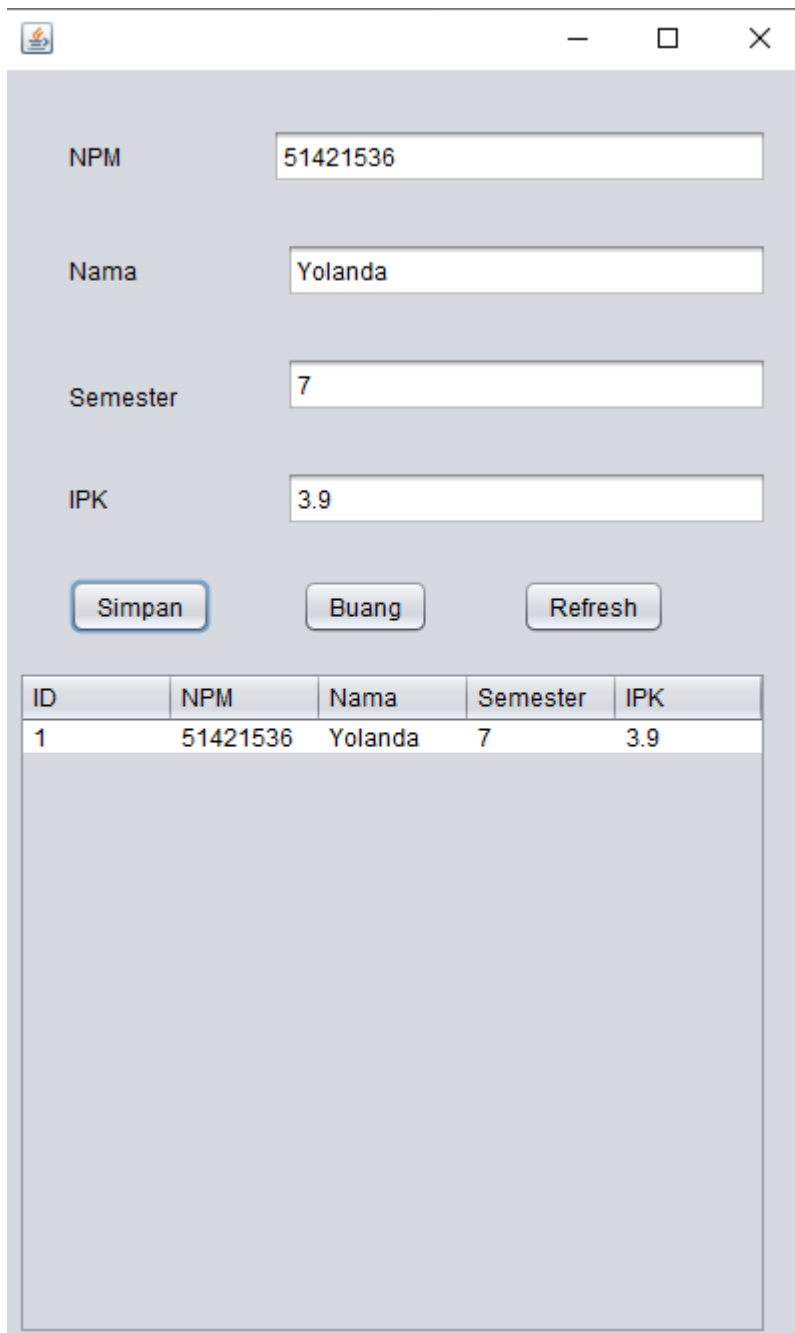


The screenshot shows a window titled "Simpan" with a standard Windows-style title bar (minimize, maximize, close buttons). Inside the window, there are four input fields for student data: "NPM" (51421536), "Nama" (Yolanda), "Semester" (7), and "IPK" (3.9). Below these fields are three buttons: "Simpan", "Buang", and "Refresh". At the bottom of the window is a table with the following data:

ID	NPM	Nama	Semester	IPK
1	51421536	Yolanda	7	3.9

Hapus

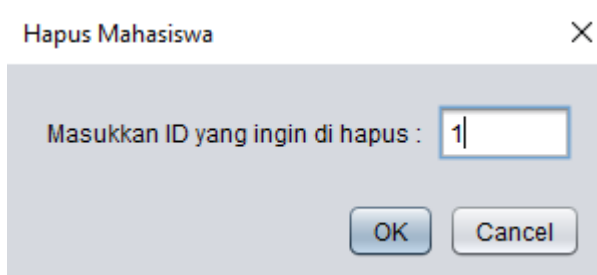

The screenshot shows a dialog box titled "Hapus Mahasiswa" with a close button (X). The dialog contains a label "Masukkan ID yang ingin di hapus :" followed by a text input field containing the number "1". At the bottom of the dialog are two buttons: "OK" and "Cancel".

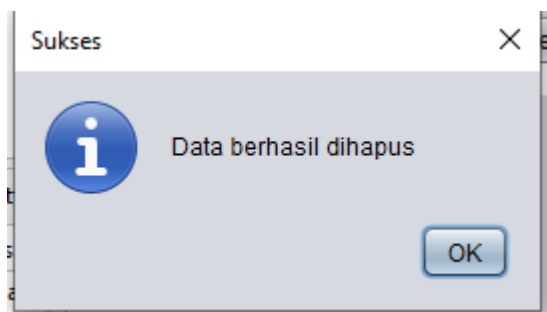

Refresh

The main application window has a title bar with a small icon, a minus sign, a maximize button, and a close button (X). The window contains four input fields with labels to their left: 'NPM' with the value '51421536', 'Nama' with the value 'Yolanda', 'Semester' with the value '7', and 'IPK' with the value '3.9'. Below these fields are three buttons: 'Simpan' (Save), 'Buang' (Delete), and 'Refresh'. At the bottom of the window is a table with five columns: 'ID', 'NPM', 'Nama', 'Semester', and 'IPK'. The table body is currently empty.

ID	NPM	Nama	Semester	IPK
----	-----	------	----------	-----