

MerchantPro Mobile Money API

Documentation

Overview

The MerchantPro API provides authentication, account enquiry, fund transfer, OTP management, and transaction status features for merchant banking operations.

All endpoints require an API key and (after login) a Bearer authentication token.

Authentication

Headers (required for most endpoints)

Key	Value	Description
X-API-KEY	CLIENT_sk_KJ7sVk3p_T2Xn9rQ8yLfP5gRtWmY6zDh	API key used to authenticate client applications
Authorization	Bearer <token>	Returned from the AuthCustomer login endpoint

Base URL

<https://subweb.zenithbank.com/swagger/index.html>

Or

<https://subweb.zenithbank.com/>

To reach each endpoint, append the endpoint to the base URL like this:

<https://subweb.zenithbank.com/Authentication/AuthCustomer>

Endpoints Summary

1. Authentication

Endpoint	Method	Description
/Authentication/AuthCustomer	POST	Authenticates a customer and returns a JWT token

2. Account Enquiry

Endpoint	Method	Description
/Transaction/AccountEnquiry	POST	Retrieves information for a customer or settlement account

3. Fund Transfer

Endpoint	Method	Description
/Transaction/FundTransfer	POST	Initiates a fund transfer request (S2B or B2S)
/Transaction/ConfirmTransfer	POST	Confirms a transfer using OTP
/Transaction/ResendOtp	POST	Resends OTP for transfer confirmation

4. Transaction Status

Endpoint	Method	Description
/Transaction/TransactionStatus/{transactionNo}	GET	Retrieves the status of a transaction

1. Authentication

POST /Authentication/AuthCustomer

Headers


Key	Value
X-API-KEY	CLIENT sk KJ7sVk3p T2Xn9rQ8yLfP5gRtWmY6zDh

Request Body

```
{
  "username": "SmartKopor",
  "password": "P@ssw0rd@123"
}
```

Response

Returns a JWT Bearer token required for subsequent operations.

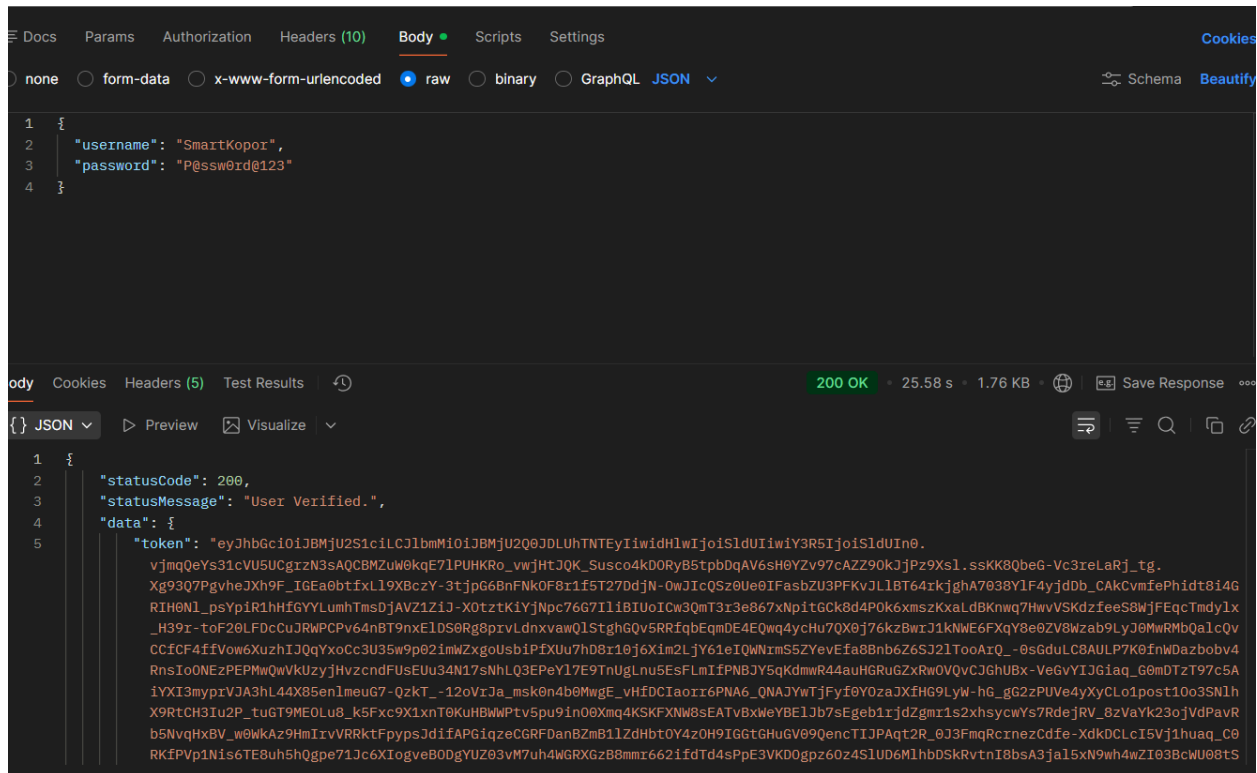


This Token is required for the Header of the EndPoint Below

2. Account Enquiry

POST /Transaction/AccountEnquiry (Customer Account)

Headers

- Authorization: Bearer <Enter generated token. see image below>
- X-API-KEY: CLIENT_sk_KJ7sVk3p_T2Xn9rQ8yLfP5gRtWmY6zDh

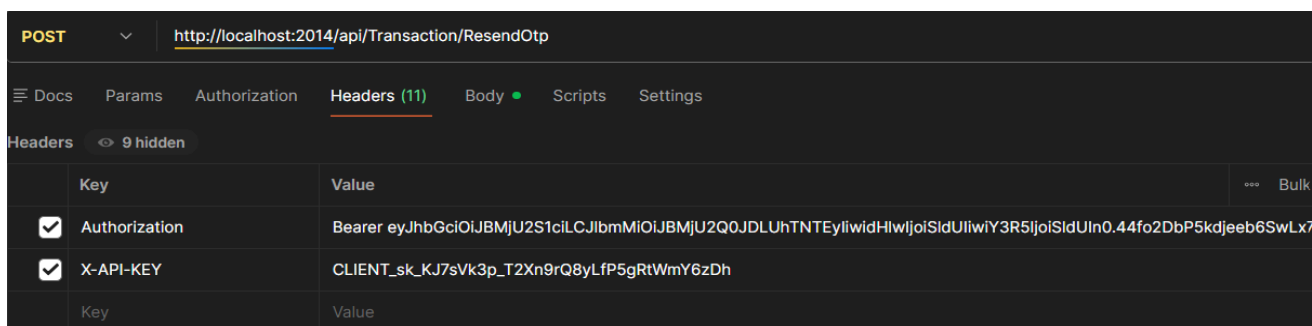

Note: there is a space between the **Bearer** and the **Token** pasted in **Authorization**

Body

```
{
  "accountNo": "6090102431",
  "currency": null,
  "customerType": "C"
}
```

Notes

- `customerType: "C"` → Customer account enquiry

POST /Transaction/AccountEnquiry (Settlement Account)

Body

```
{
  "accountNo": null,
  "currency": "SLE",
  "customerType": "S"
}
```

Notes

- `customerType: "S"` → Settlement account
- Currency examples: "SLE", "GMD" etc.

3. Fund Transfer

POST /Transaction/FundTransfer

Headers

Authorization + X-API-KEY

- Authorization: Bearer <Enter generated token. see image below>
- X-API-KEY: CLIENT_sk_KJ7sVk3p_T2Xn9rQ8yLfP5gRtWmY6zDh

Body

```
{
  "accountNo": "6090102431",
  "transType": "B2S", // B2S or S2B
  "amount": 21,
  "transactionNo": ""
}
```

Notes

- transType:
 - "S2B" Settlement → Bank
 - "B2S" Bank → Settlement

POST /Transaction/ConfirmTransfer

Headers

Authorization + X-API-KEY

- Authorization: Bearer <Enter generated token. see image below>
- X-API-KEY: CLIENT_sk_KJ7sVk3p_T2Xn9rQ8yLfP5gRtWmY6zDh

Body

```
{
  "otp": "280347", //OTP will be sent to the Customer reg phone Number
  "transactionId": "4B1QmJBAsAaLln5kYbI+JA==" //Get transactionId from
                                              // Fundtransfer result
}
```

POST /Transaction/ResendOtp

Headers

Authorization + X-API-KEY

- Authorization: Bearer <Enter generated token. see image below>
- X-API-KEY: CLIENT_sk_KJ7sVk3p_T2Xn9rQ8yLfP5gRtWmY6zDh

Body

```
{  
  "transactionId": "4B1QmJBAsAaLln5kYbI+JA=="  
}
```

4. Transaction Status

GET /Transaction/TransactionStatus/{transactionNo}

Example

GET /Transaction/TransactionStatus/MM251118-1

Headers

Authorization + X-API-KEY

- Authorization: Bearer <Enter generated token. see image below>
- X-API-KEY: CLIENT_sk_KJ7sVk3p_T2Xn9rQ8yLfP5gRtWmY6zDh