

Integrate Azure Monitor with OAuth authentication

- Release version: Australia
-
- Updated March 12, 2026
-
- ⌚ 4 minutes to read

Integrate Microsoft Azure with Event Management by authenticating Azure V1 or V2 tokens in the Azure Monitor.

Before you begin

Ensure that the Event Management Connectors (sn_em_connector) plugin is installed on the ServiceNow AI Platform instance.

On the Azure portal, alert correlation rules are defined through the Correlate alerts setting within Alert Processing Rules. When Correlate alerts is assigned on the Azure portal, the Azure Monitor alerts received on the ServiceNow® instance within 60 minutes are grouped using tag based alert clustering.

Roles required: evt_mgmt_admin, web_service_admin, and oauth_admin

About this task

Configure the Event Management environment for the collection of events from Azure Monitor. In your Azure Monitor portal, set your ServiceNow AI Platform instance as the rest endpoint using V1 or V2 tokens.

Procedure

1. In the Azure Monitor portal:
 - a. Perform app registration and expose an API.
For more information about registering an app and exposing an API in Azure, see <https://docs.microsoft.com/en-us/azure/active-directory/develop/quickstart-configure-app-expose-web-apis>.
 - b. Create an action group with a secure webhook, and provide the rest endpoint as `https://<instance-name>.service-now.com/api/sn_em_connector/em/inbound_event?source=azuremonitor`.
- Note:

If you have multiple tenants on the Azure portal and you want to use bidirectional functionality to acknowledge, close, or reopen an alert on the Azure Portal, then the URL for the secure webhook has to be in the following format:

```
https://<username>:<password>@<instance-name>.service-  
now.com/api/sn_em_connector/em/inbound_event?  
source=azuremonitor&event_class=<new_connector_instance_name> . The  
<new_connector_instance_name> is the new Azure pull connector instance that  
you need to create for each tenant with other Azure service principal credentials.  
To know how to create the pull connector, see Configure Azure Monitor Bi-  
directional connector.
```

For servicenowservices.com instances, the rest endpoint has to be
https://<instance-
name>.servicenowservices.com/api/sn_em_connector/em/inbound_event?
source=instana&x-sn-apikey=<api-key>.

For more information about adding a secure webhook to an action group, see
<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/action-groups>.

- c. Navigate to Alerts > Manage Alert Rules.
 - d. In the Secure Webhook section, make sure that Yes is selected for the Enable the common alert schema option.
 - e. Add the action group with the secure webhook to an alert rule.
2. In the Azure Monitor portal, verify which Azure token is in use by your registered application.
- a. Navigate to App Registration, and select the registered application.
 - b. In the Manage section, click Manifest.
 - c. In the editor screen, select the Microsoft Graph App Manifest tab and locate the requestedAccessTokenVersion parameter or select the AAD Graph App Manifest tab and locate the accessTokenAcceptedVersion parameter.
If the value of requestedAccessTokenVersion or accessTokenAcceptedVersion is 2, the integration must use V2 tokens.

If the value of requestedAccessTokenVersion or accessTokenAcceptedVersion is 1 or null, the integration must use V1 tokens.
3. In your ServiceNow AI Platform instance, ensure that the ServiceNow user is assigned with the correct Application (client) ID or Application ID URI.
Also ensure the relevant ServiceNow sys_user is assigned the evt_mgmt_integration role.
- a. Navigate to System Security > Users and groups > Users.
Note:
To ensure proper authentication, use the least privileged user with the evt_mgmt_integration role, rather than a high privileged user.
 - b. Verify that the Source field for the ServiceNow sys_user is populated with the correct Application (client) ID or Application ID URI, as defined in the Azure Monitor

portal.

If the application is using an Azure V1 token, the Source field must be populated with the Application ID URI of the registered application. If the application is using an Azure V2 token, the Source field must be populated with the Application (client) ID of the registered application.

If the Source field is not displayed, change the form layout to display this field. Click the context menu icon (☰) and select Configure > Form Layout. Move Source to the Selected list.

Note:

If your ServiceNow AI Platform instance version is earlier than Paris Patch 2 or Orlando Patch 9, the Source field value must be enclosed in square brackets. For example, [api://azuretest].

4. In your ServiceNow AI Platform instance, navigate to Event Management > Integrations > Azure OAuth Config.

5. Click Azure OAuth OIDC Entry and enter the Client ID.

If the registered application is using an Azure V2 token, the Client ID should be the same as the Application (client) ID of the app registrations defined in your Azure Monitor portal.

If the registered application is using an Azure V1 token, the Client ID should be the same as the Application ID URI of the app registrations defined in your Azure Monitor portal (the exposed API).

6. In the OAuth OIDC Provider Configuration field, click the info icon (i).

7. In the OIDC Provider Configuration window, click Open Record.

OAuth OIDC provider details.

- Name: A unique name.
- Client ID: Client ID of application registered in third-par
- Client Secret: Client secret of application registered in t
- OAuth OIDC Provider Configuration: OAuth OIDC Provid

Name Azure

Client ID <Prov

Client Secret

OAuth API Script

OIDC Provider Configuration Azure OIDC Provider Configuration

PKCE required

Clock Skew 300

Comments Used for Azure to Servicenow Integration

OIDC Provider Configuration

* OIDC Provider Azure OIDC Provider Configurati

* OIDC Metadata URL 120

* OIDC Configuration Cache Life Span 120

Application Event Management Connectors

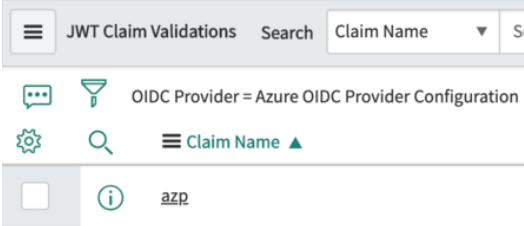
User Claim aud

User Field source

Enable JTI claim verification

Open Record

8. Enter the OIDC Metadata URL according to the Azure token used by the registered application, as shown in the following table.

Azure token	OIDC Metadata URL
V2	In the OIDC Provider Configuration form, add the following URL to the OIDC Metadata URL field: <code>https://login.microsoftonline.com/<tenant-id>/v2.0/.well-known/openid-configuration</code> Ensure that <tenant-id> is replaced with the correct Azure Tenant ID. Note: If attempting to integrate Azure Gov Cloud with the ServiceNow Azure Monitor Connector, remember to change the claim value to <code>f1f34126-d4ef-40e1-ad4b-bf5d47b4860d</code>.
V1	In the OIDC Provider Configuration form: ◦ In the Claim Name column, change <code>azp</code> to <code>appid</code>.  Note: If attempting to integrate Azure Gov Cloud with the ServiceNow Azure Monitor Connector, remember to change the claim value to <code>f1f34126-d4ef-40e1-ad4b-bf5d47b4860d</code>. ◦ In the OIDC Metadata URL field, add the following URL: <code>https://login.microsoftonline.com/<tenant-id>/v2.0/.well-known/openid-configuration</code> Ensure that <tenant-id> is replaced with the correct Azure Tenant ID.

Result

When an alert is created in Azure Monitor as part of the alert rule, the notification is sent to the ServiceNow AI Platform using the secure webhook endpoint. In your ServiceNow AI Platform instance, navigate to All Events to see the events. If you want to send alert state changes on the ServiceNow instance from the ServiceNow alerts to the Azure Portal, you need to enable

the Azure Monitor Bi-directional connector. For more information, see [Configure Azure Monitor Bi-directional connector](#) .