Candidates

Van Ginneken and slew-driven flows only insert where candidates exist

The idea


- Walk each edge; every candidate_step units place a site excluding endpoints
- Gray dots mark legal insert points

Step size

CANDIDATE SITES

Step size

Step 1 / 5 · step · module02-01-candidate-sites

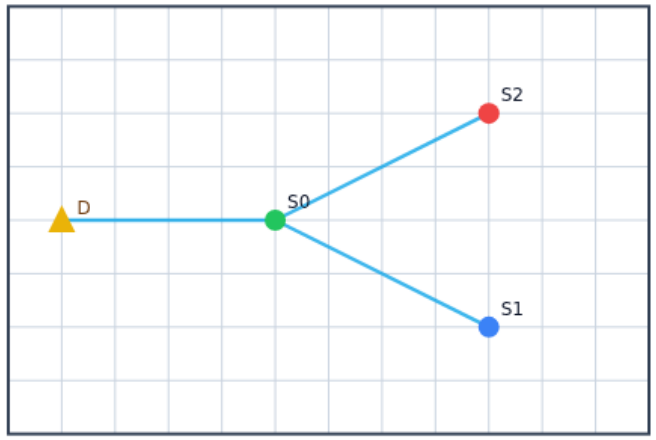

Explanation


candidate_step = 2 on the toy.

- Every 2 units

```
step=2
```

Step size

Show sites

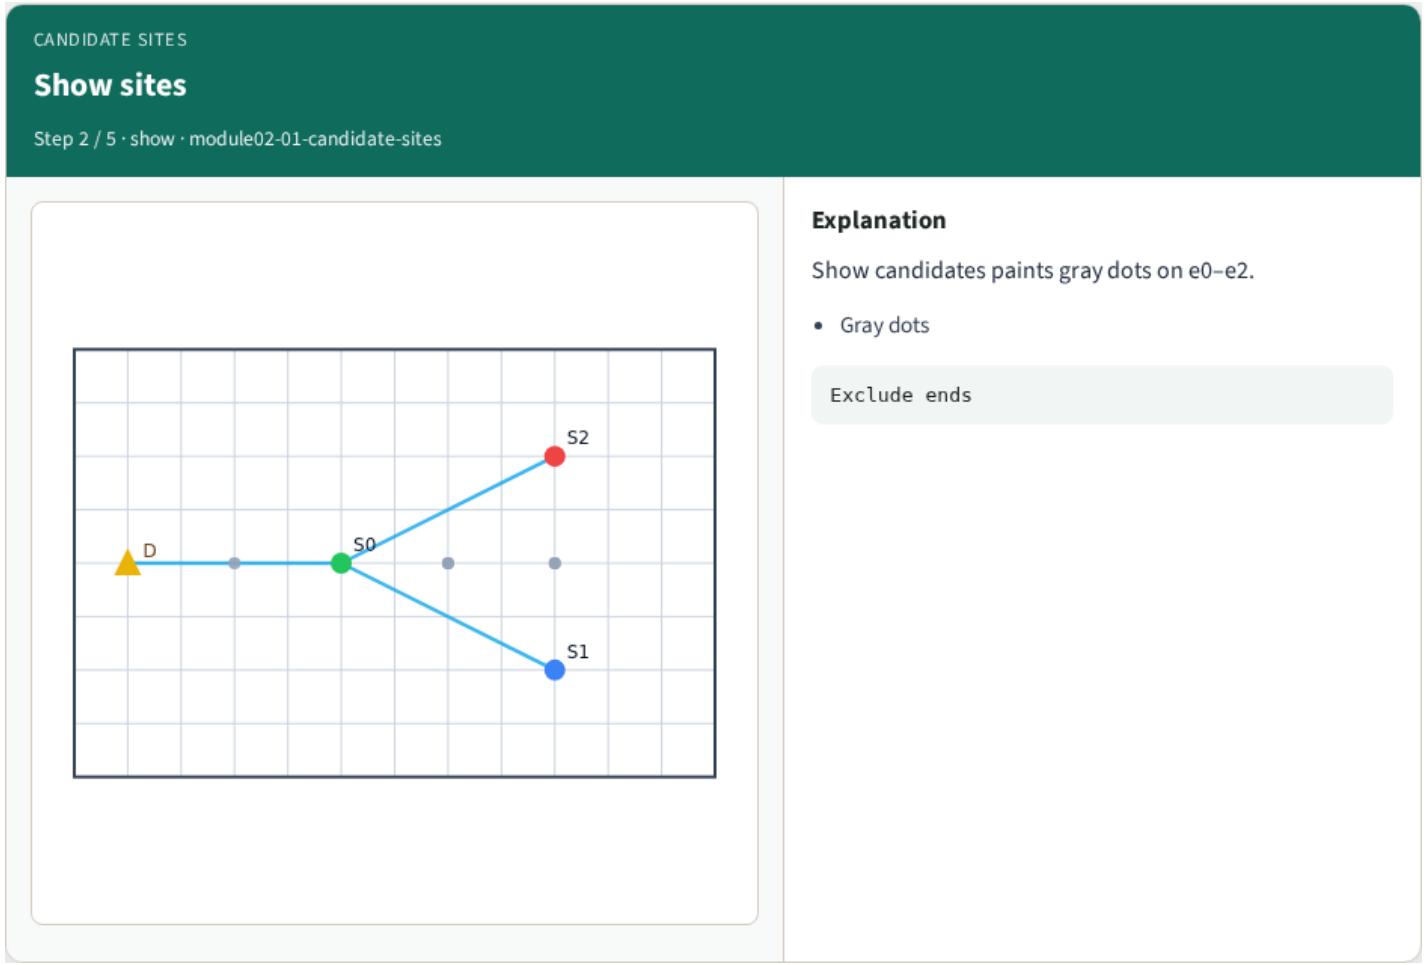


Show sites

Count

CANDIDATE SITES

Count

Step 3 / 5 · count · module02-01-candidate-sites

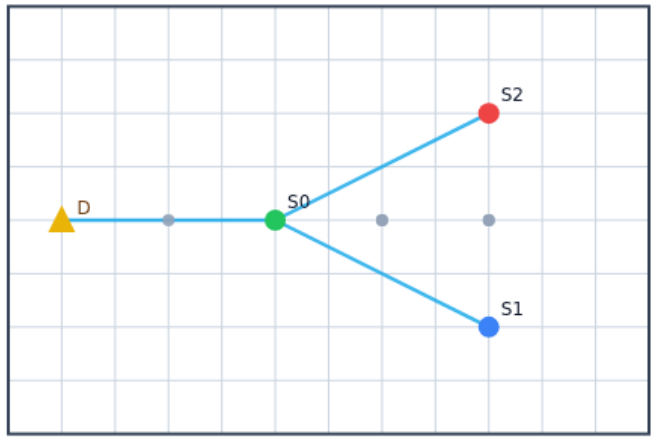

Explanation


Longer edges yield more sites.

- e0 denser

```
sites≥1
```

Count

Exclude ends

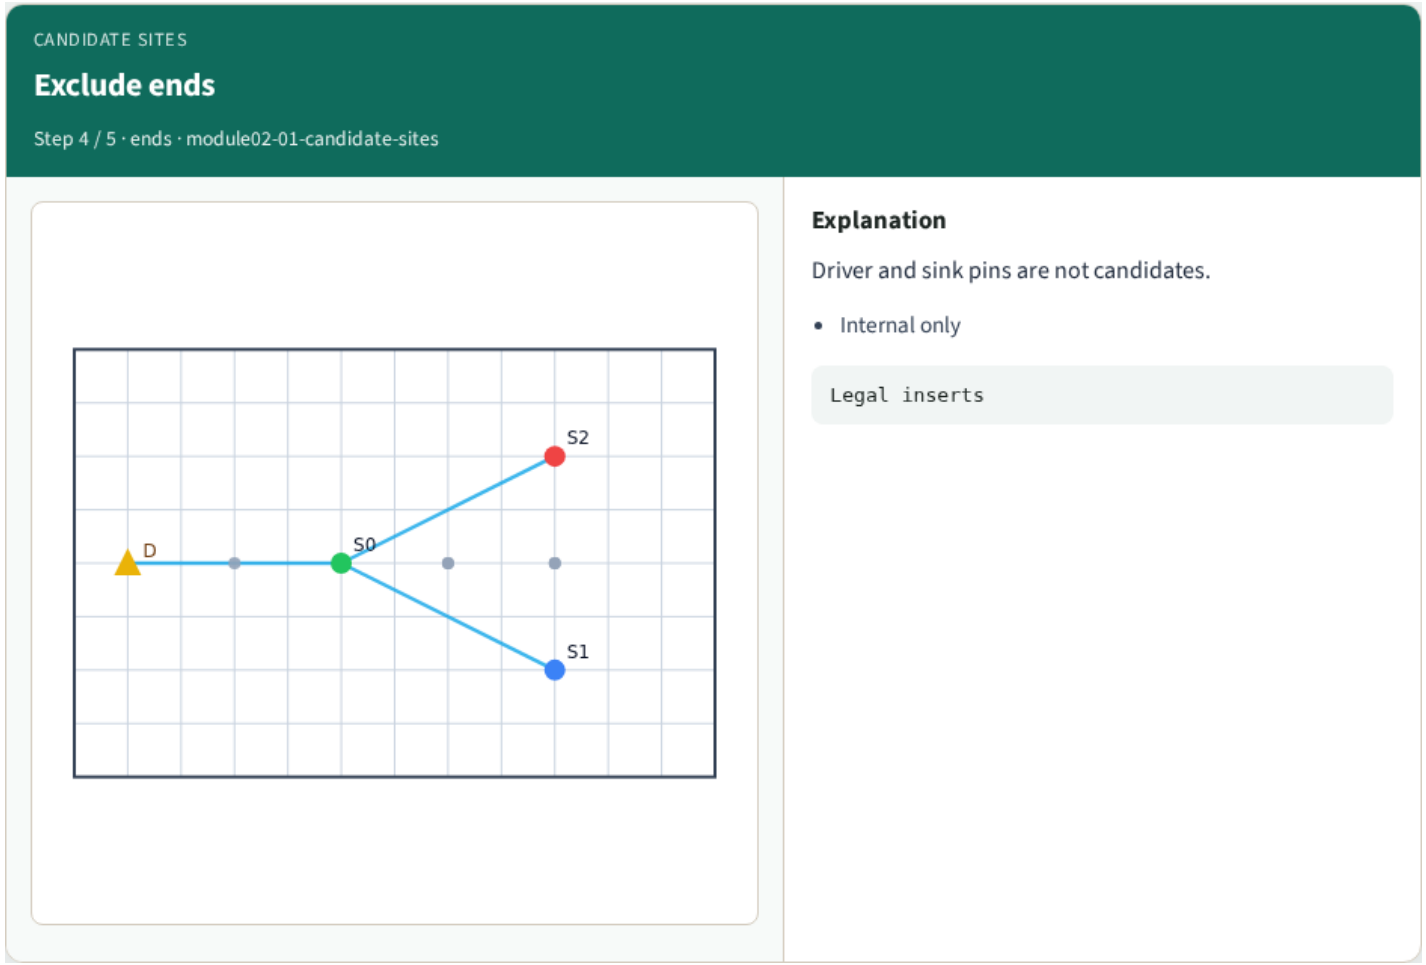


Exclude ends

Ready for DP

CANDIDATE SITES

Ready for DP

Step 5 / 5 · dp · module02-01-candidate-sites

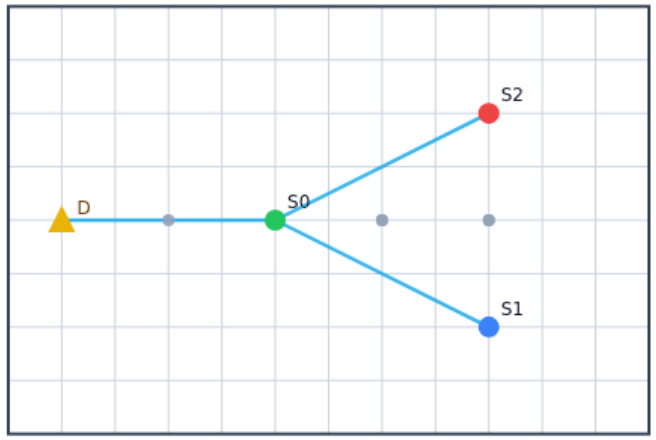

Explanation


Sites feed Van Ginneken options next.

- Library next

```
VG lab
```

Ready for DP

Browser lab track

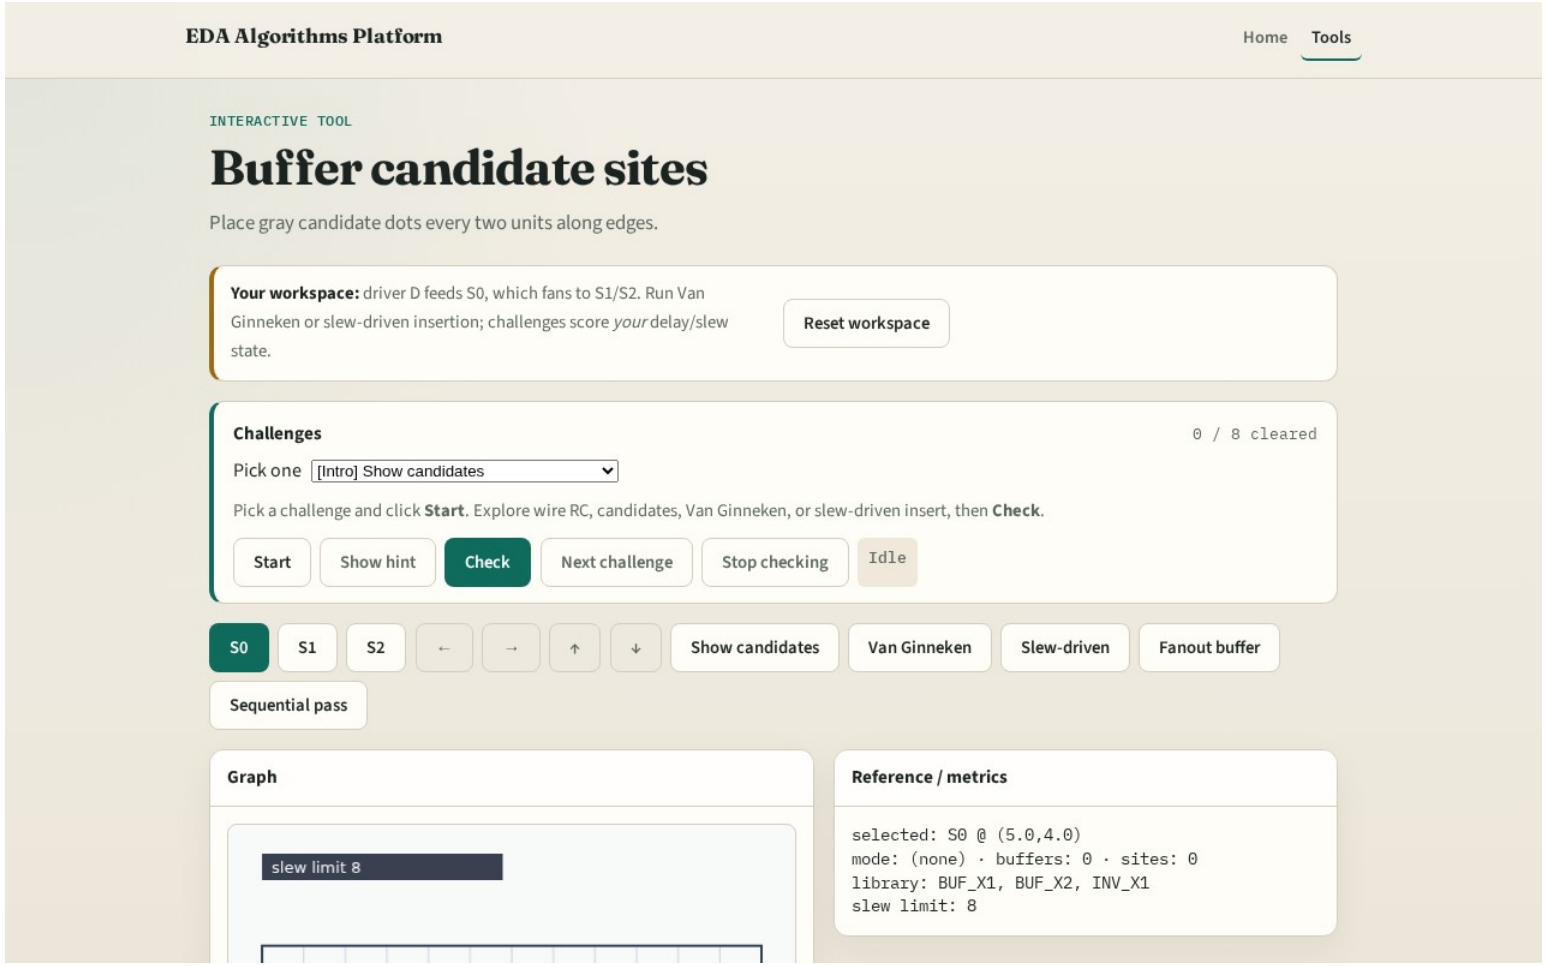

Browser lab starter

Implement track

- Call `candidate_sites(data)`
- Assert length > 0 for tiny_buf

Pitfalls

- Placing sites past the far endpoint
- Using step zero
- Forgetting diagonal HV walk

Your turn

- Next: the buffer library cells you can instantiate