
Pin binding

Binding table maps layout X0→mn1 and layout nets to schematic ports

The idea


- GOLDEN: X0→mn1, X1→mp1; 4 net binds

Dev bind

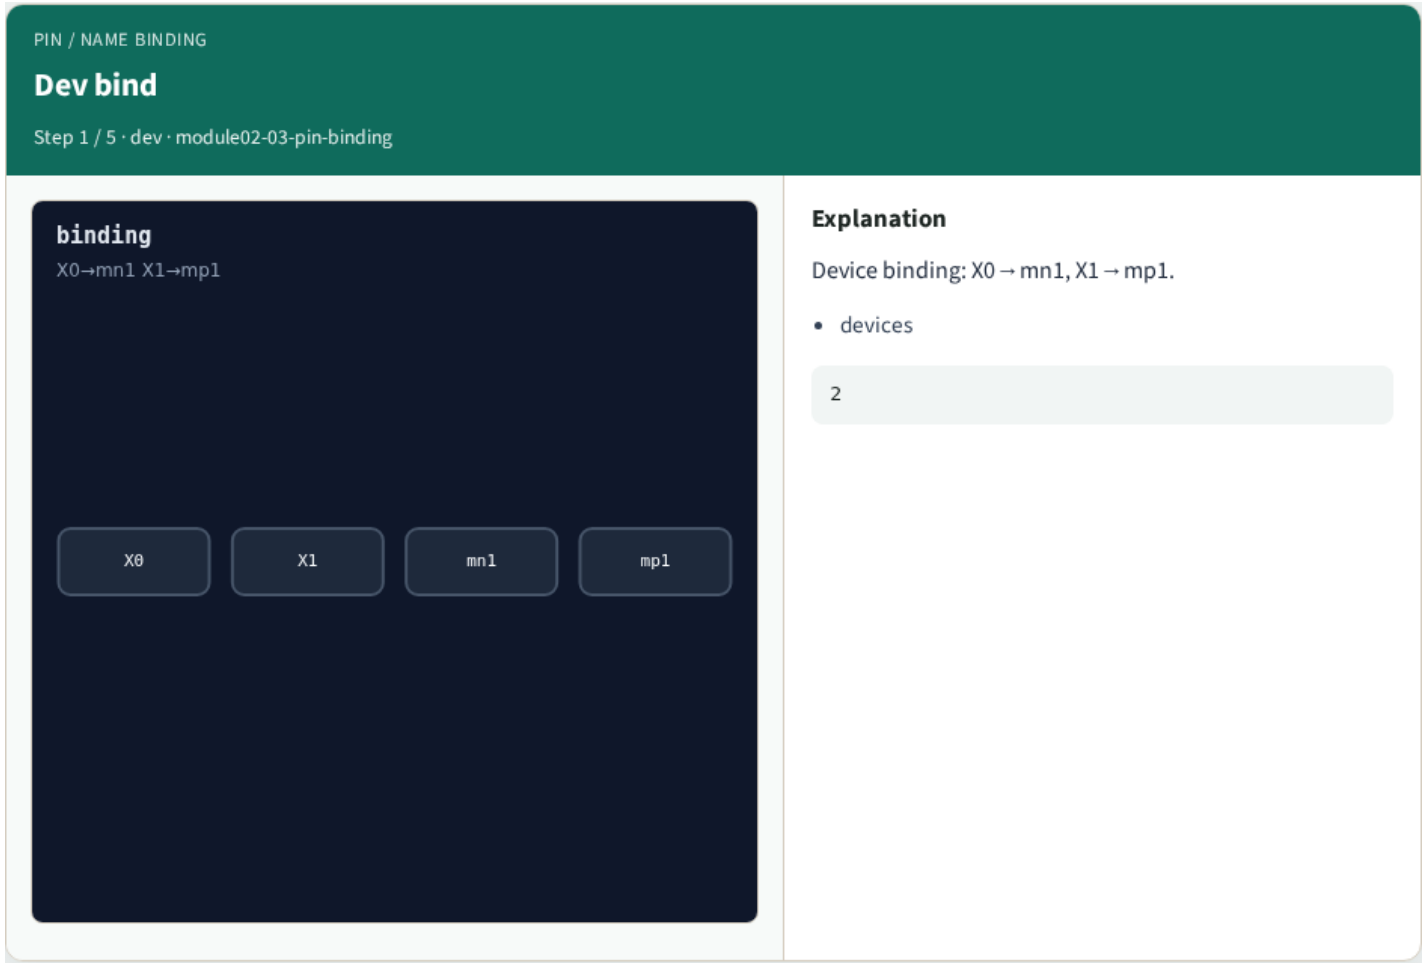


Dev bind

Net bind

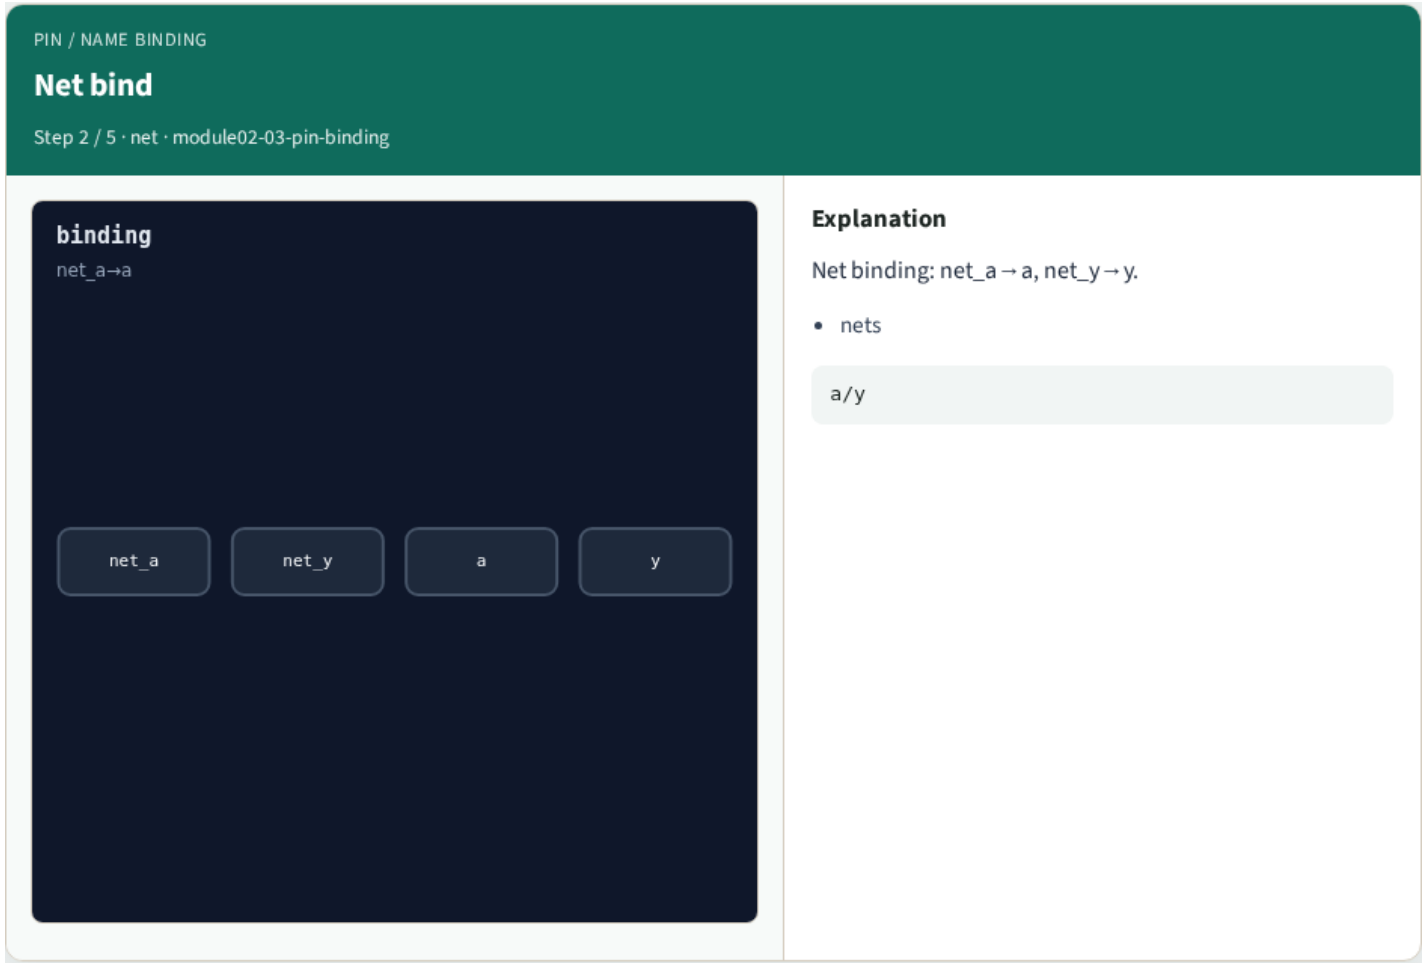


Net bind

Supplies

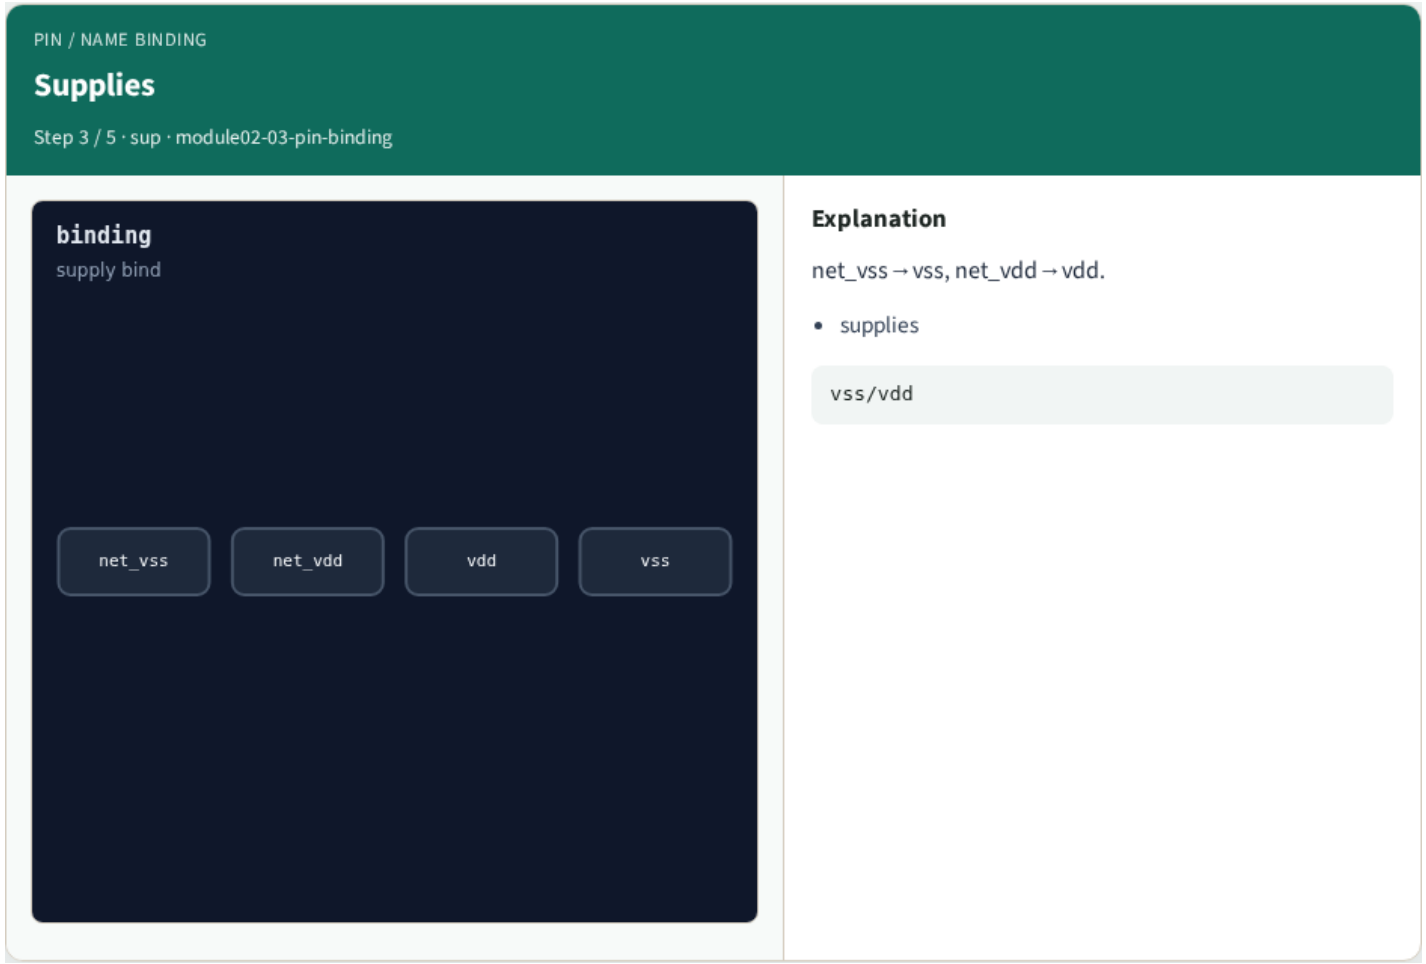


Supplies

Pairs

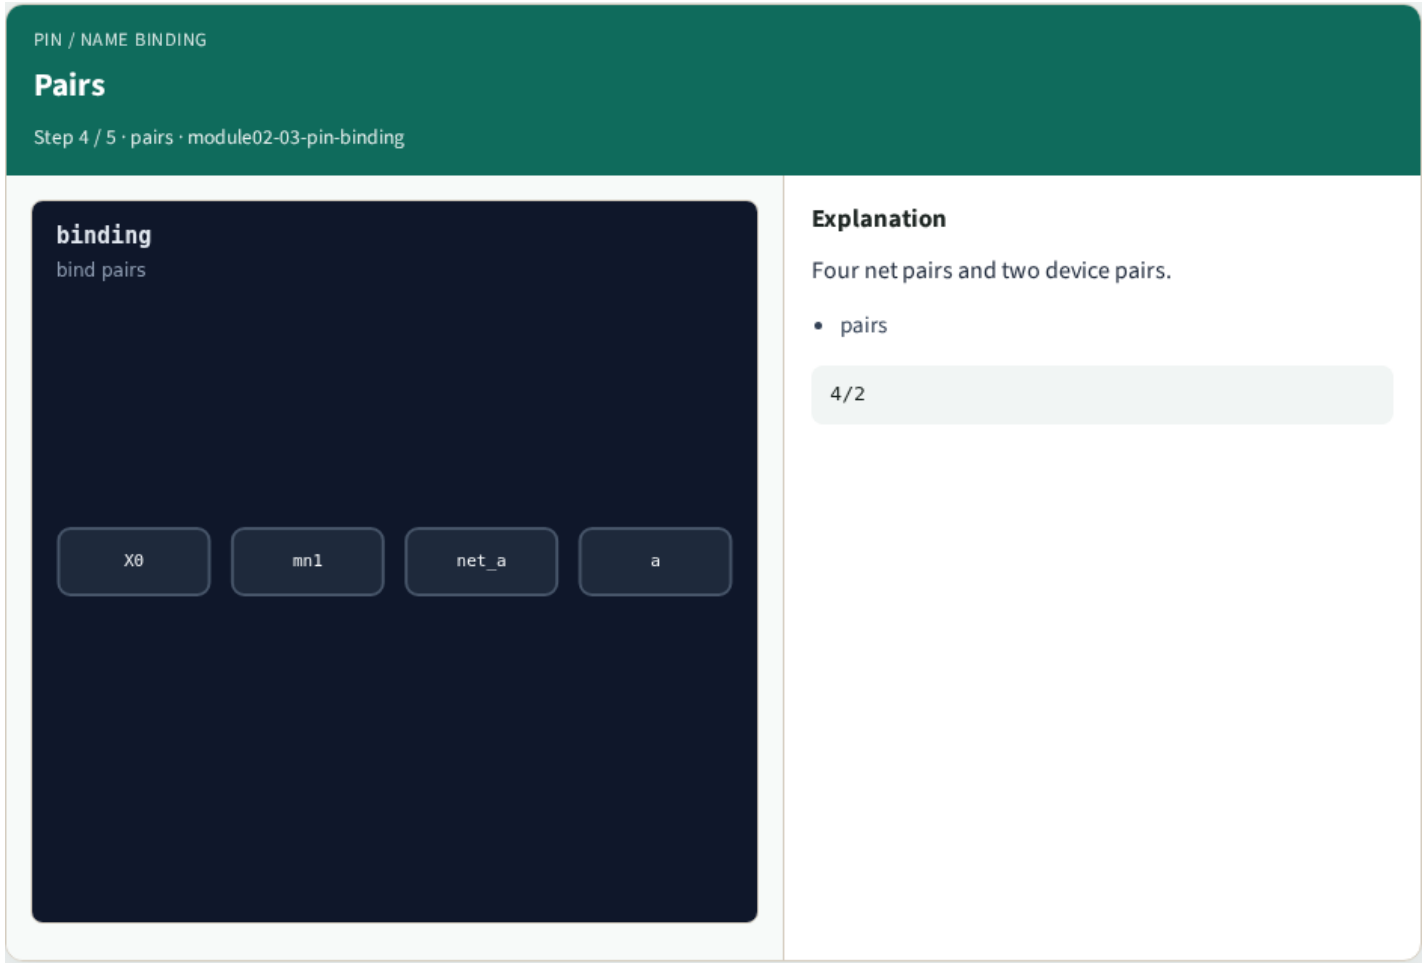
PIN / NAME BINDING
Pairs
Step 4 / 5 · pairs · module02-03-pin-binding
binding
bind pairs
X0
mn1
net_a
a
Explanation
Four net pairs and two device pairs.
pairs
4/2


Pairs

Golden

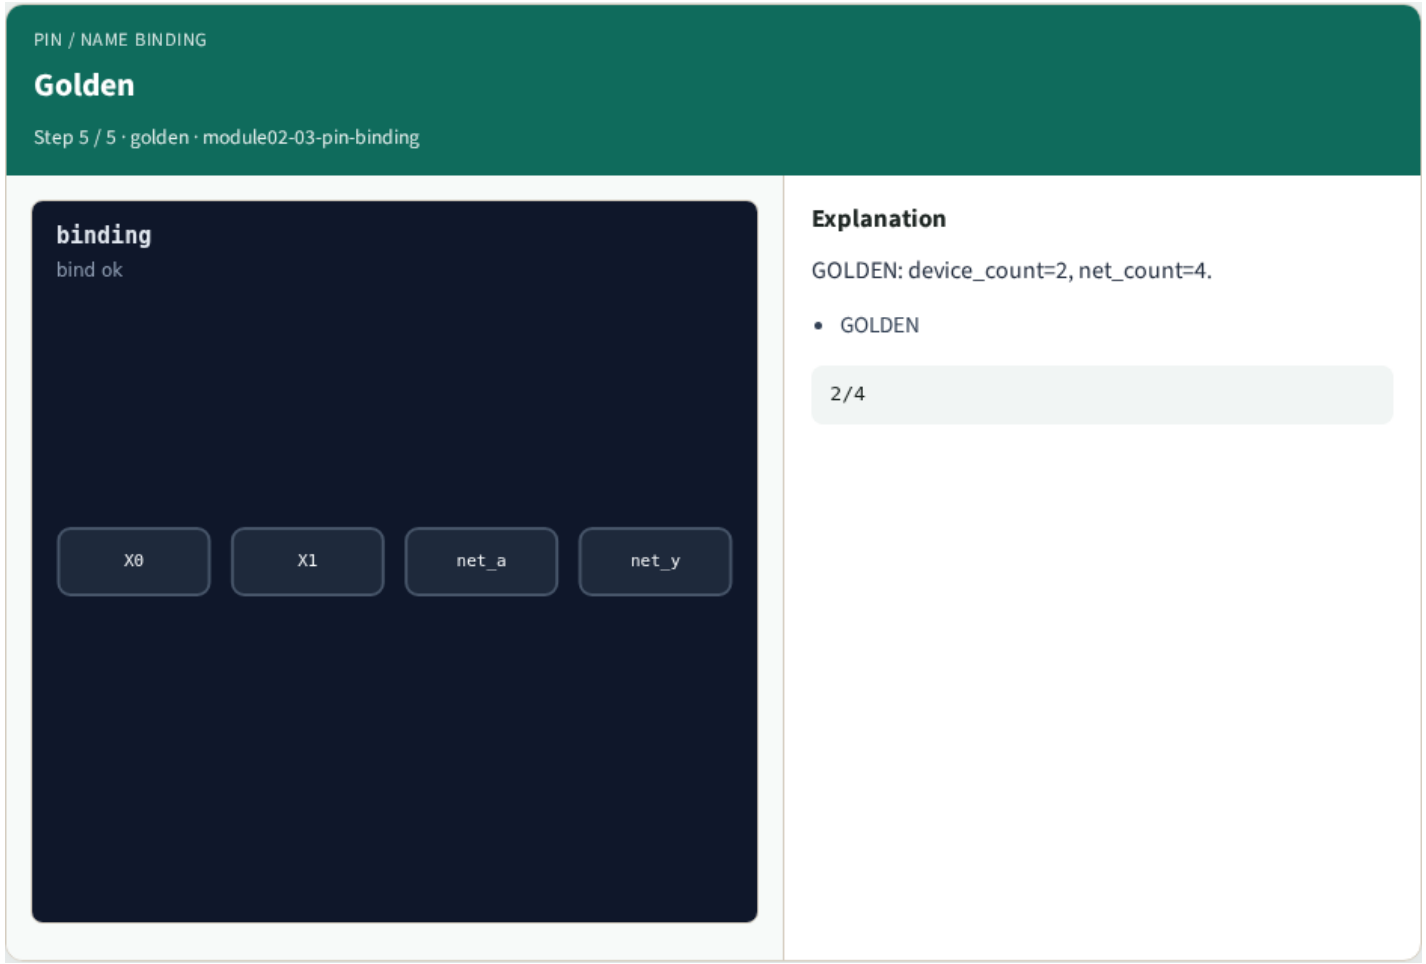

Golden

Browser lab track

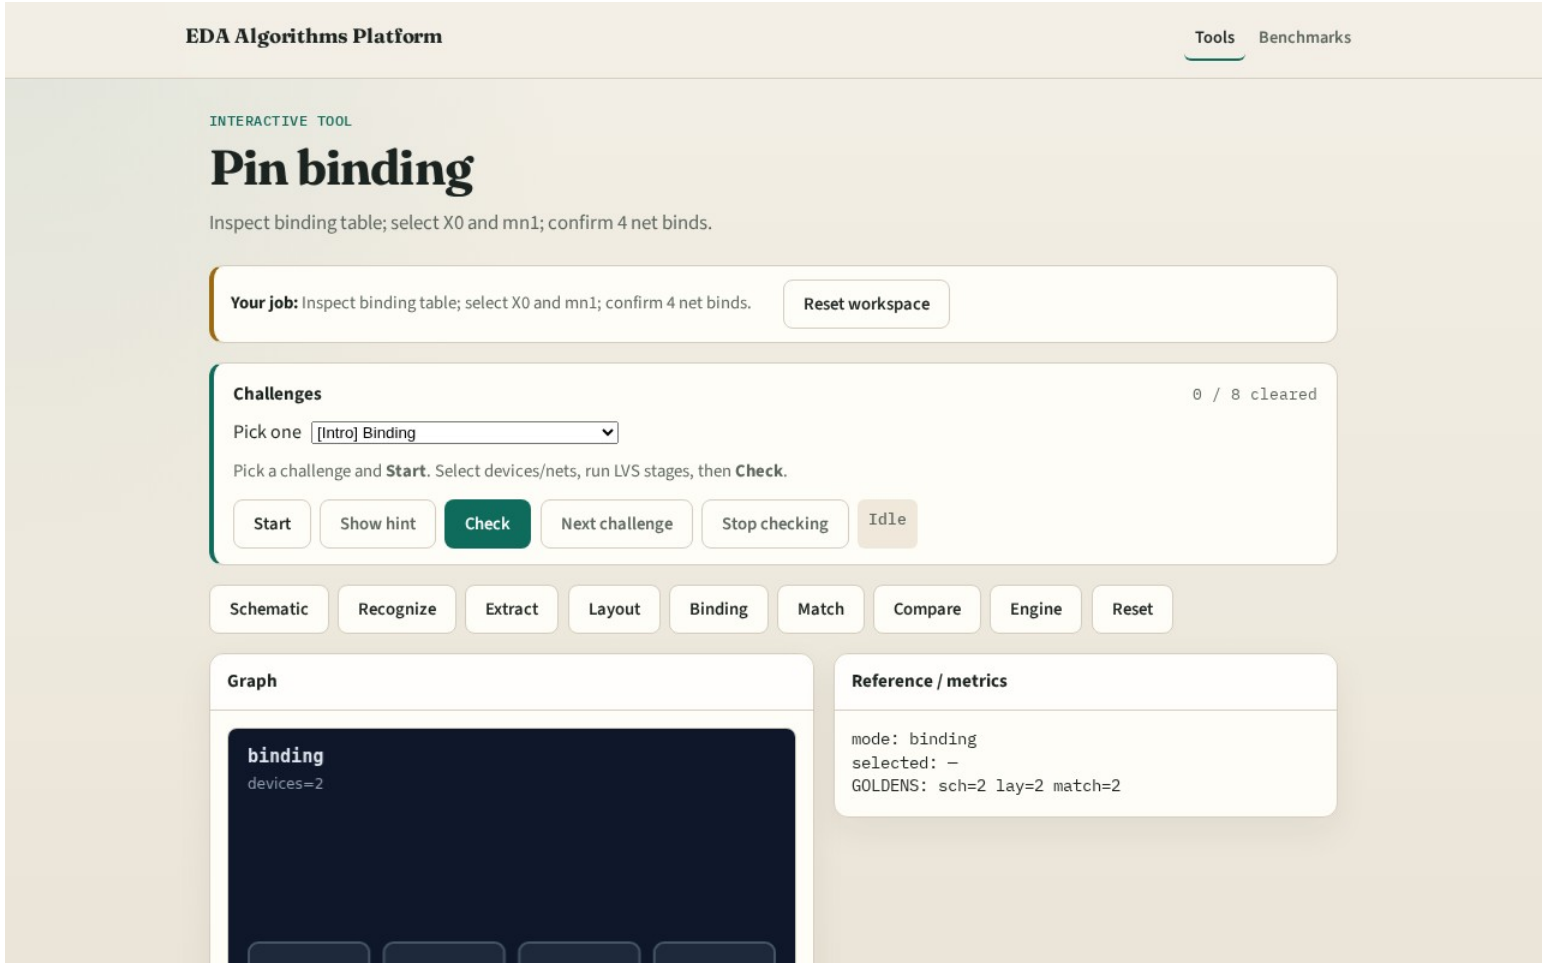

Browser lab starter

Implement track

- Call pin_binding(); assert devices['X0']=='mn1' and len(nets)==4

Pitfalls

- Binding by position instead of connectivity
- Missing a supply bind

Your turn

- Next: device matching