
Why algorithms

Hash devices by nmos/pmos class for compare

The idea


- GOLDEN: hash_device_count=2

Device classes

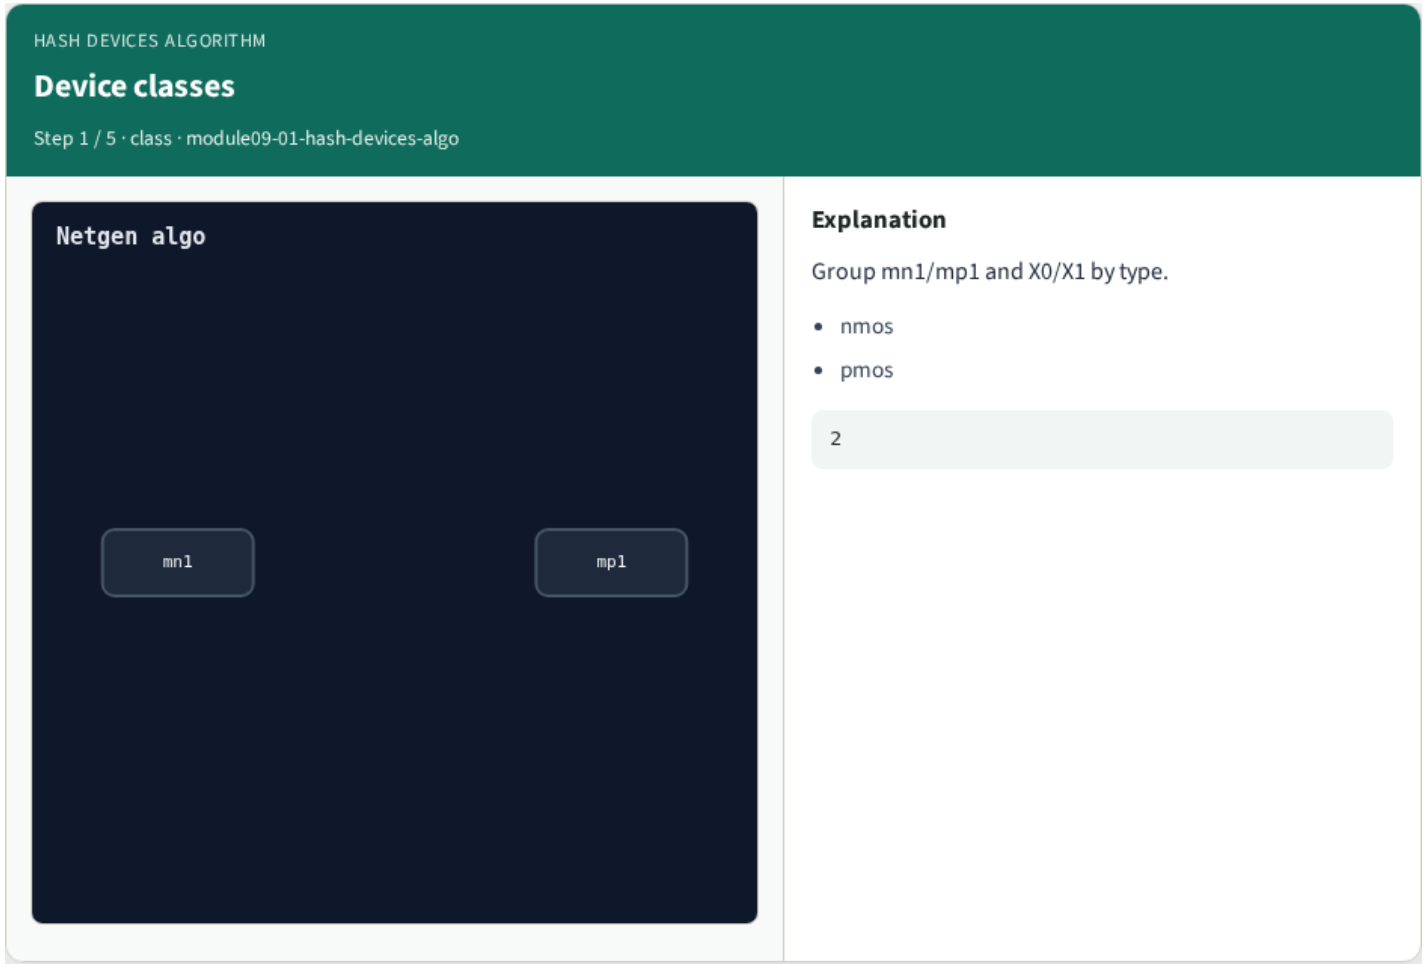


Device classes

Hash buckets

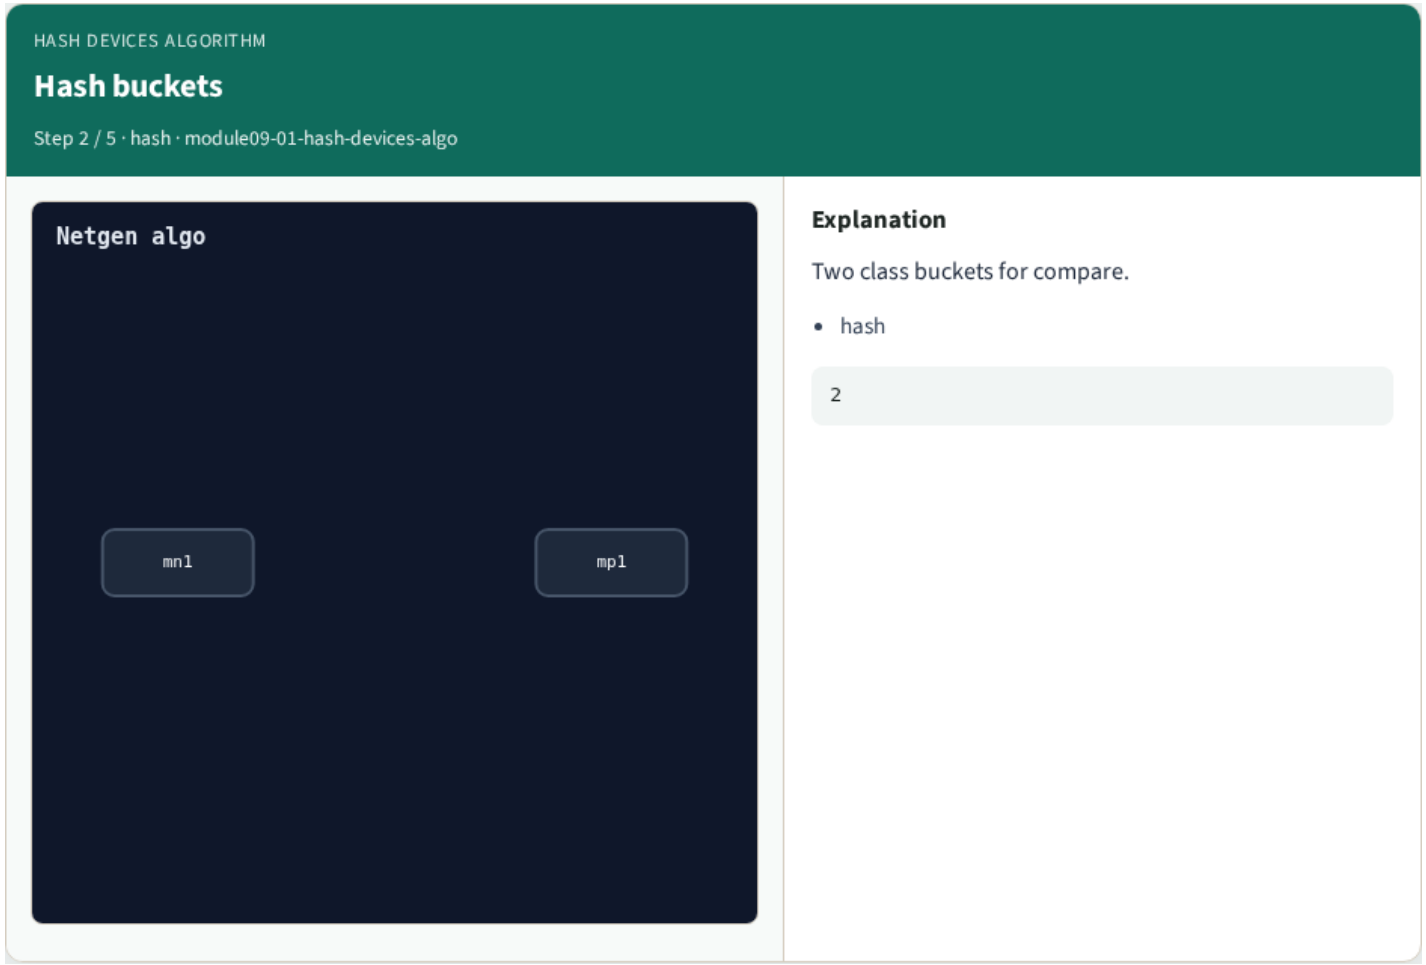


Hash buckets

Schematic side

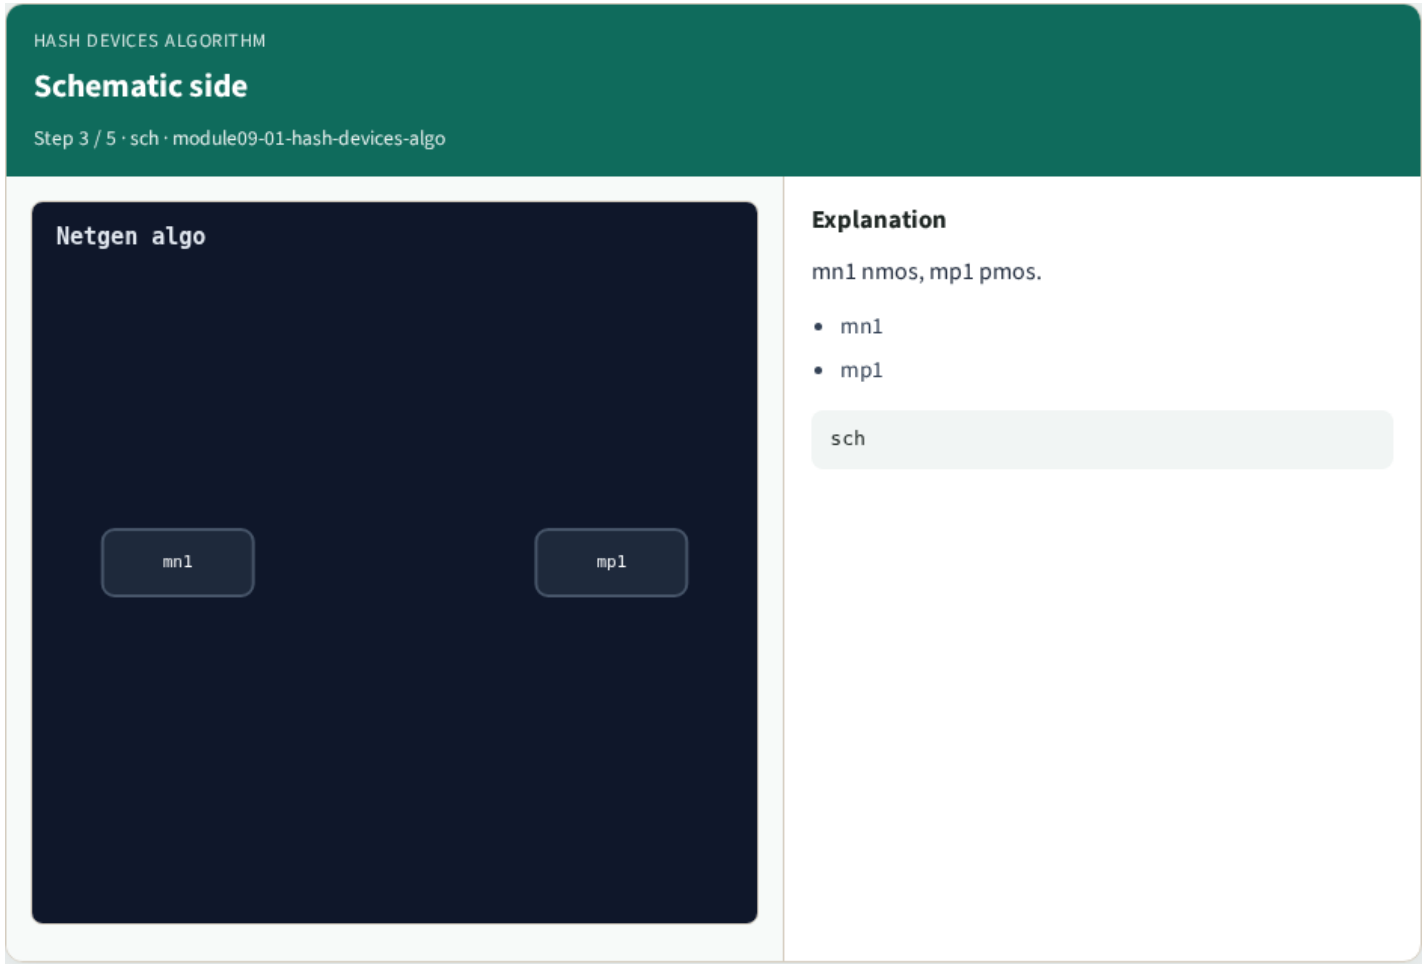


Schematic side

Layout side

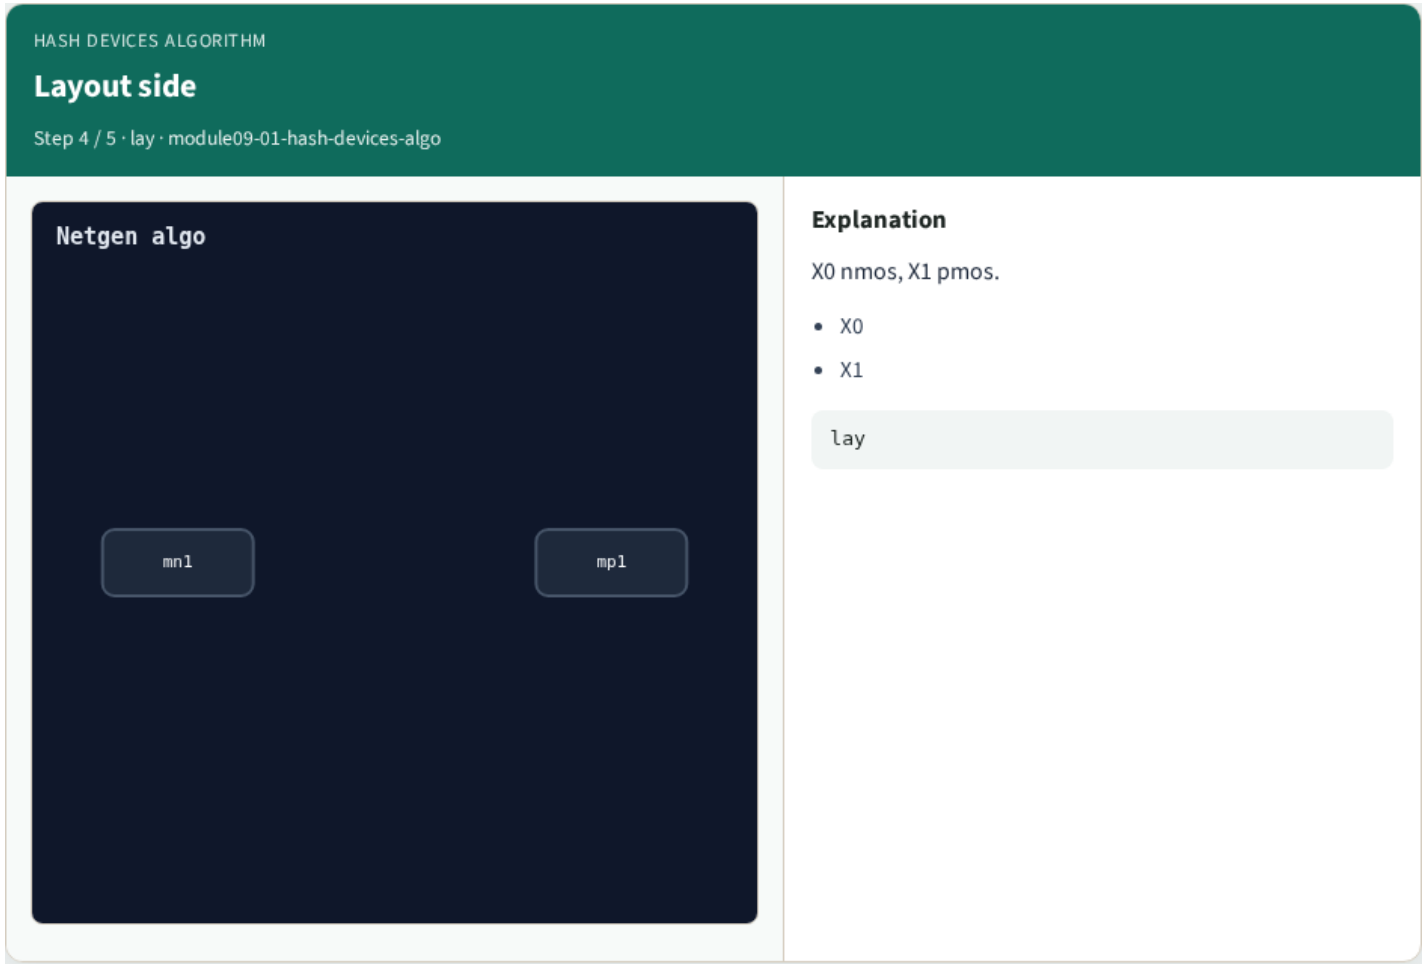

Layout side

Golden

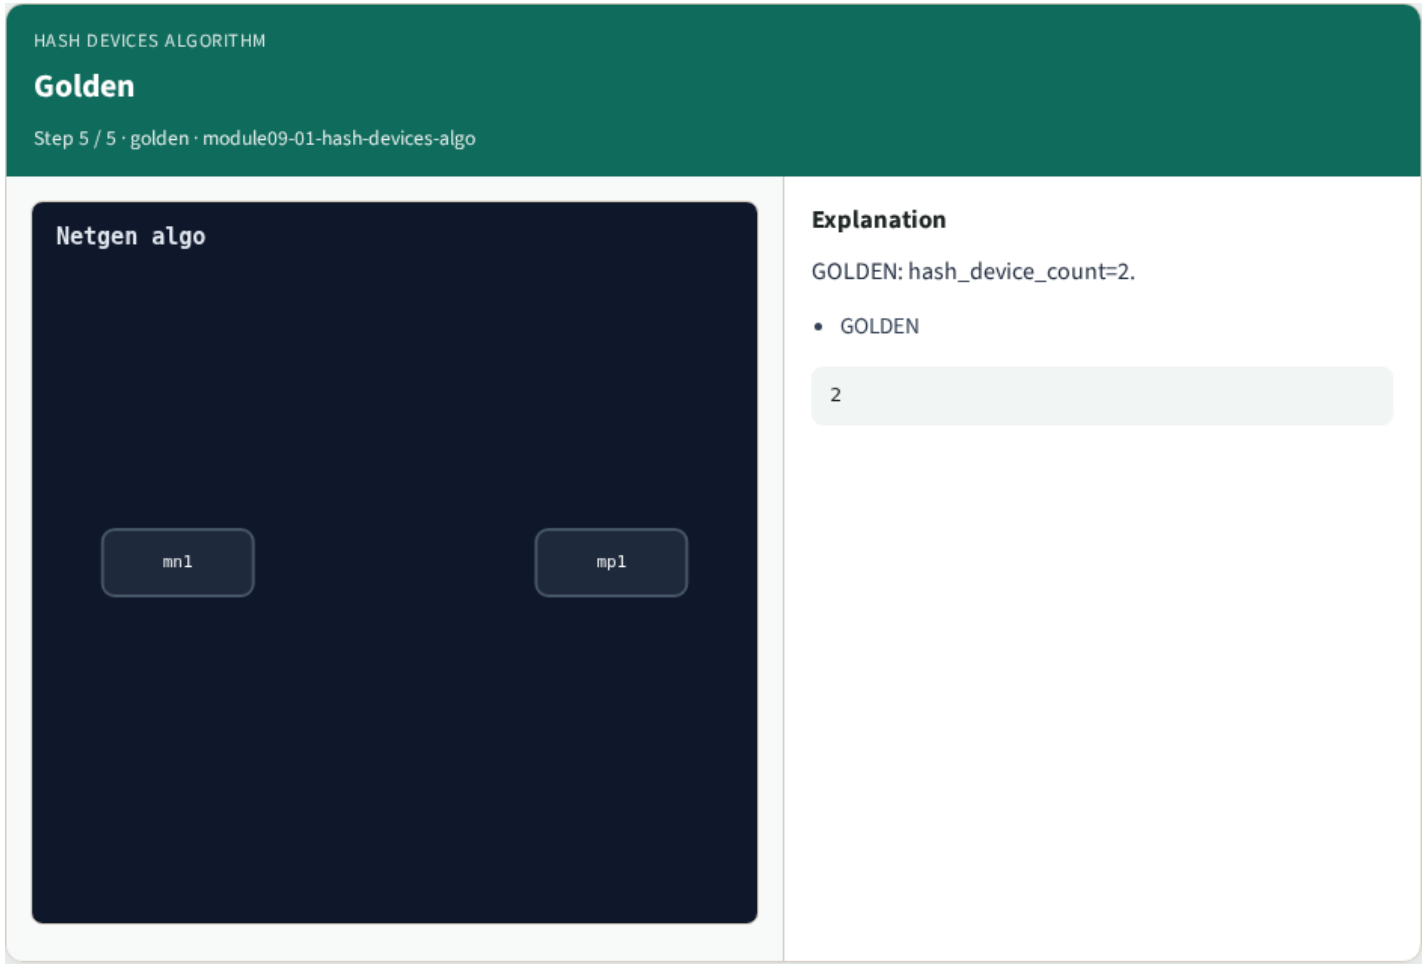

Golden

Browser lab

- Open **hash-devices-algo**

Implement track

- Run algo_solvers.py and partc_bind.py

Pitfalls

- Changing tiny_algo_netgen without updating Part B goldens

Try these

- From the common folder, run the Part C self-tests

Try these — try these

```
cd courses/learn_netgen/common
python3 algo_solvers.py
python3 partc_bind.py
```

Pseudocode

- Here is the check in plain steps

Pseudocode — try these

```
hash_device_count=2.
ok if goldens match and bind
```

Next

- Complete the quiz for this part
- Continue Part C, then internals