
Why read FindPath

Part C algorithms match moves

The idea


- GOLDEN: tag endpoints

Tag endpoints

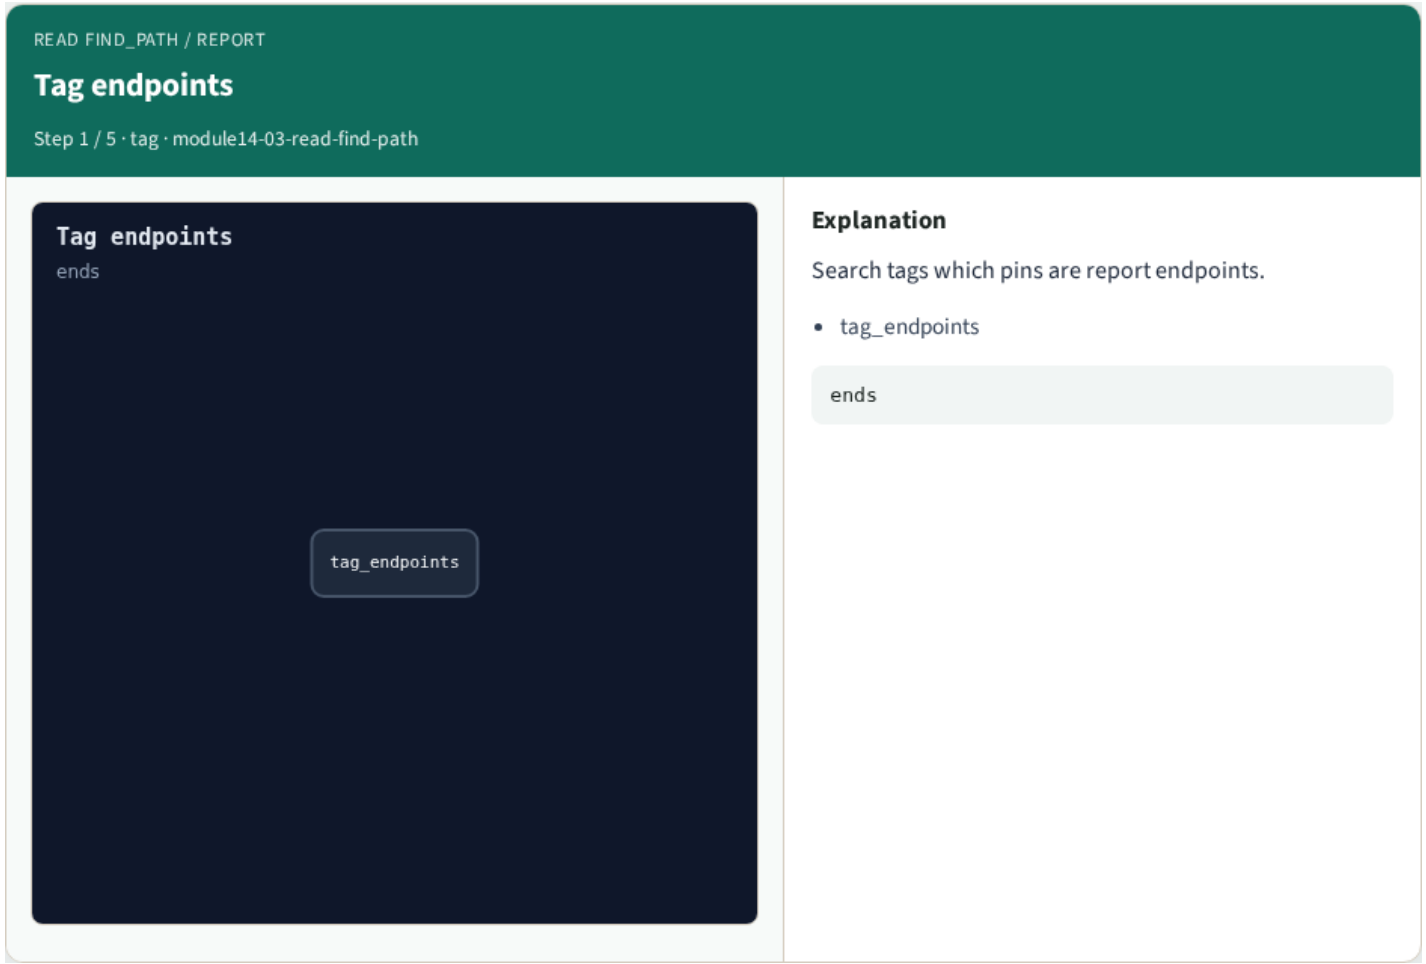


Tag endpoints

Walk back

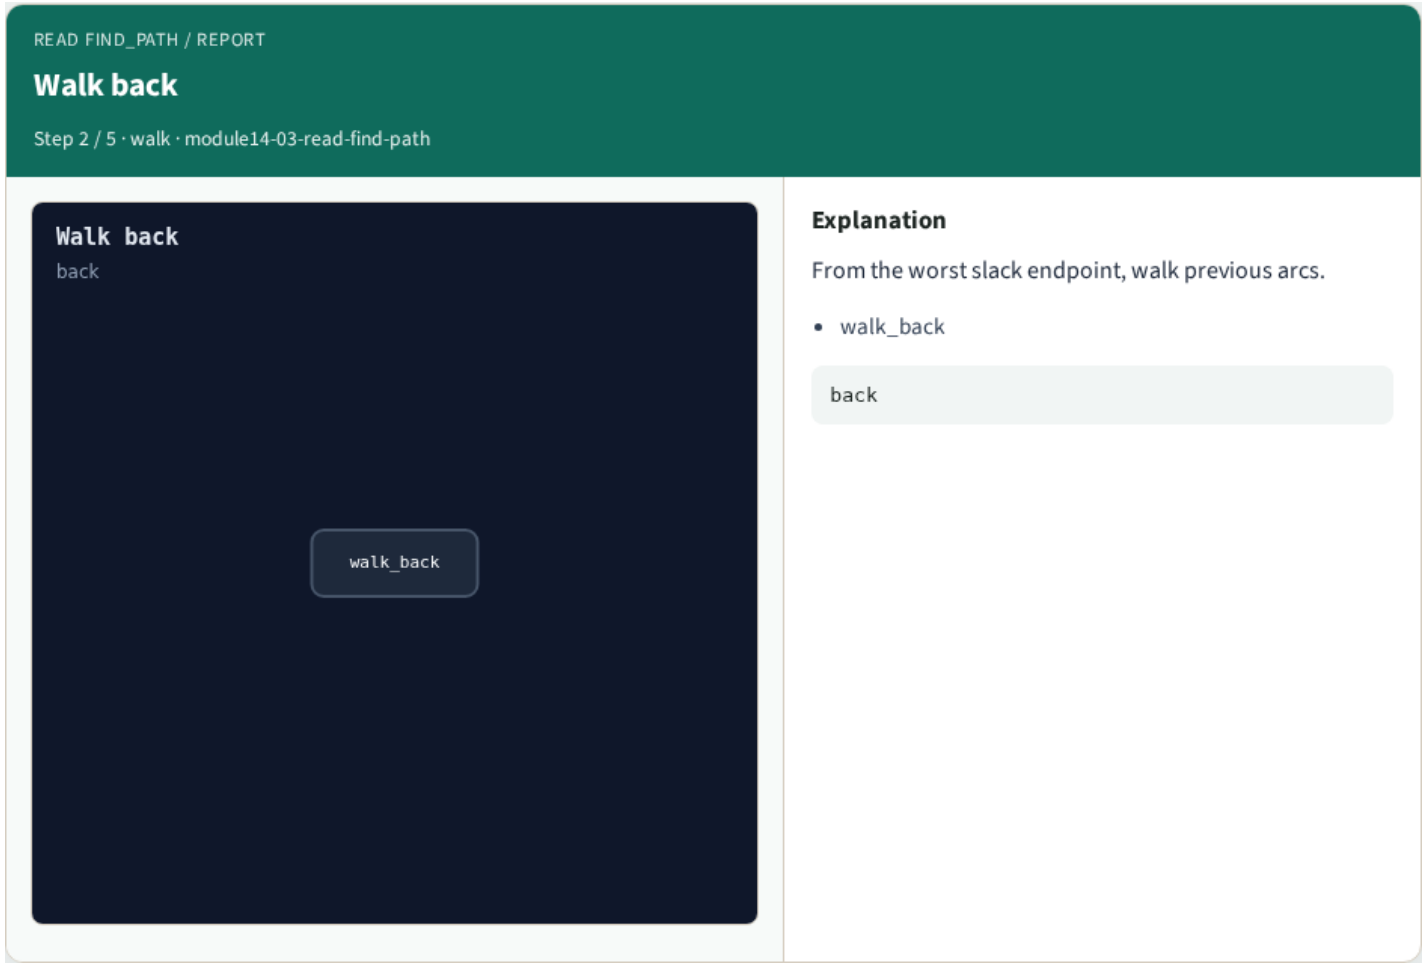


Walk back

Emit path

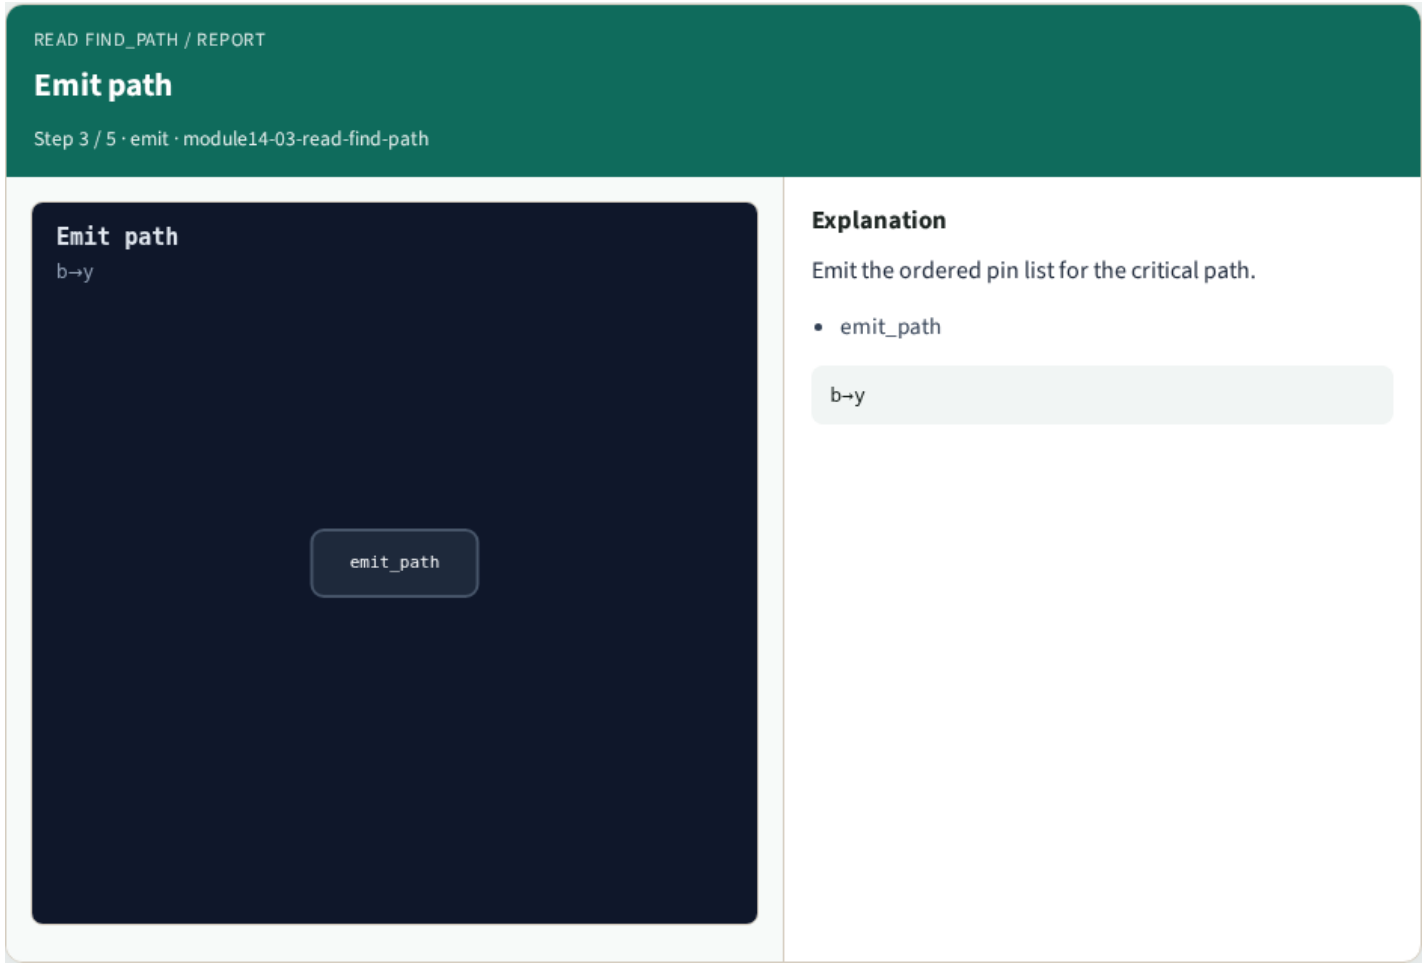


Emit path

report_checks

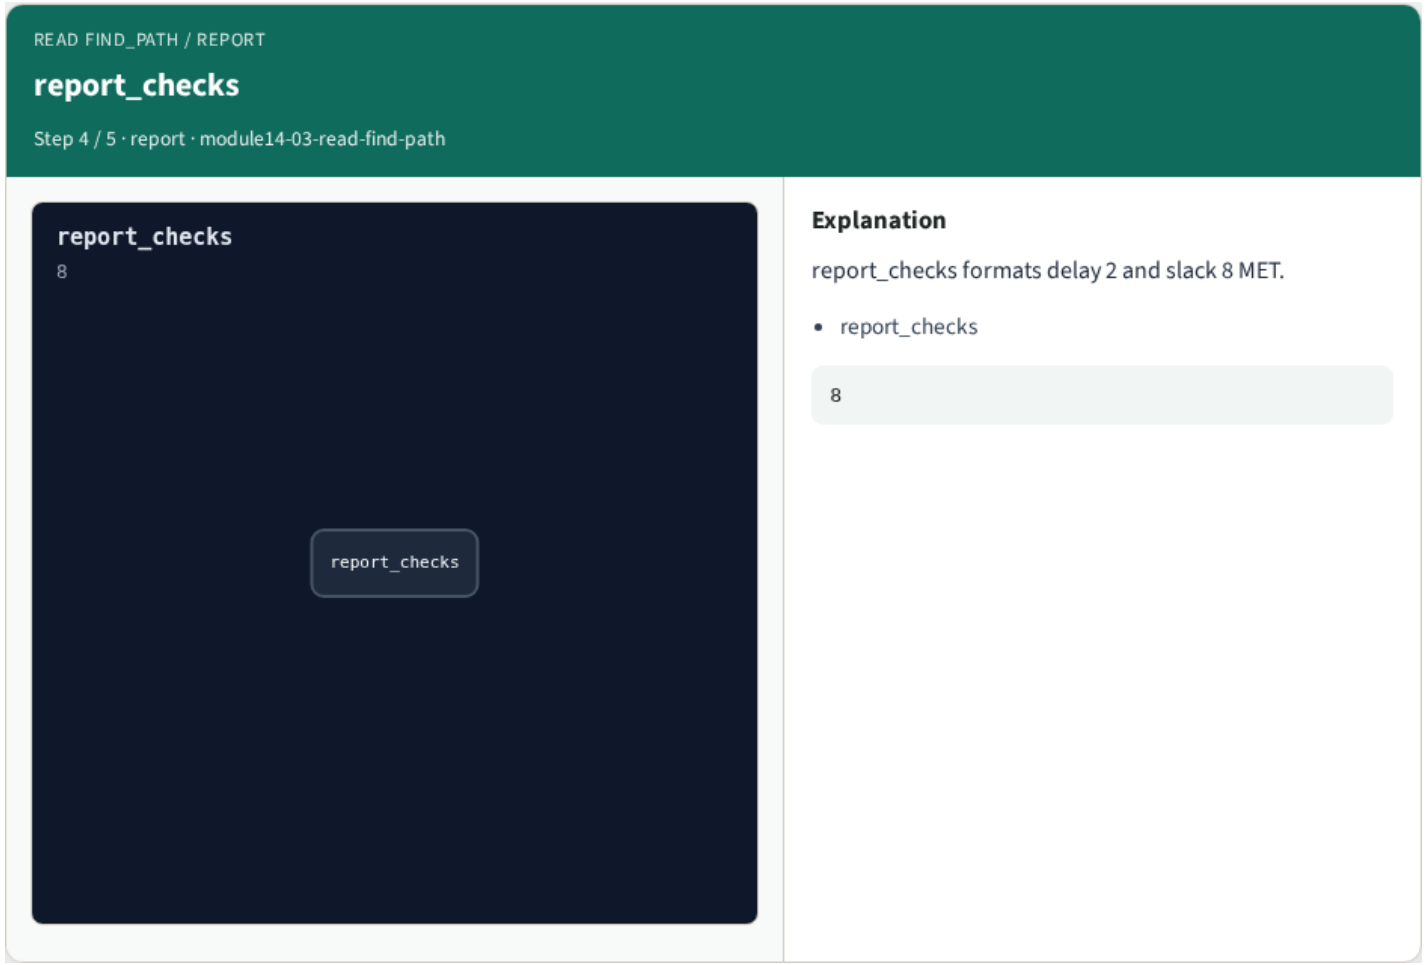

report_checks

Golden

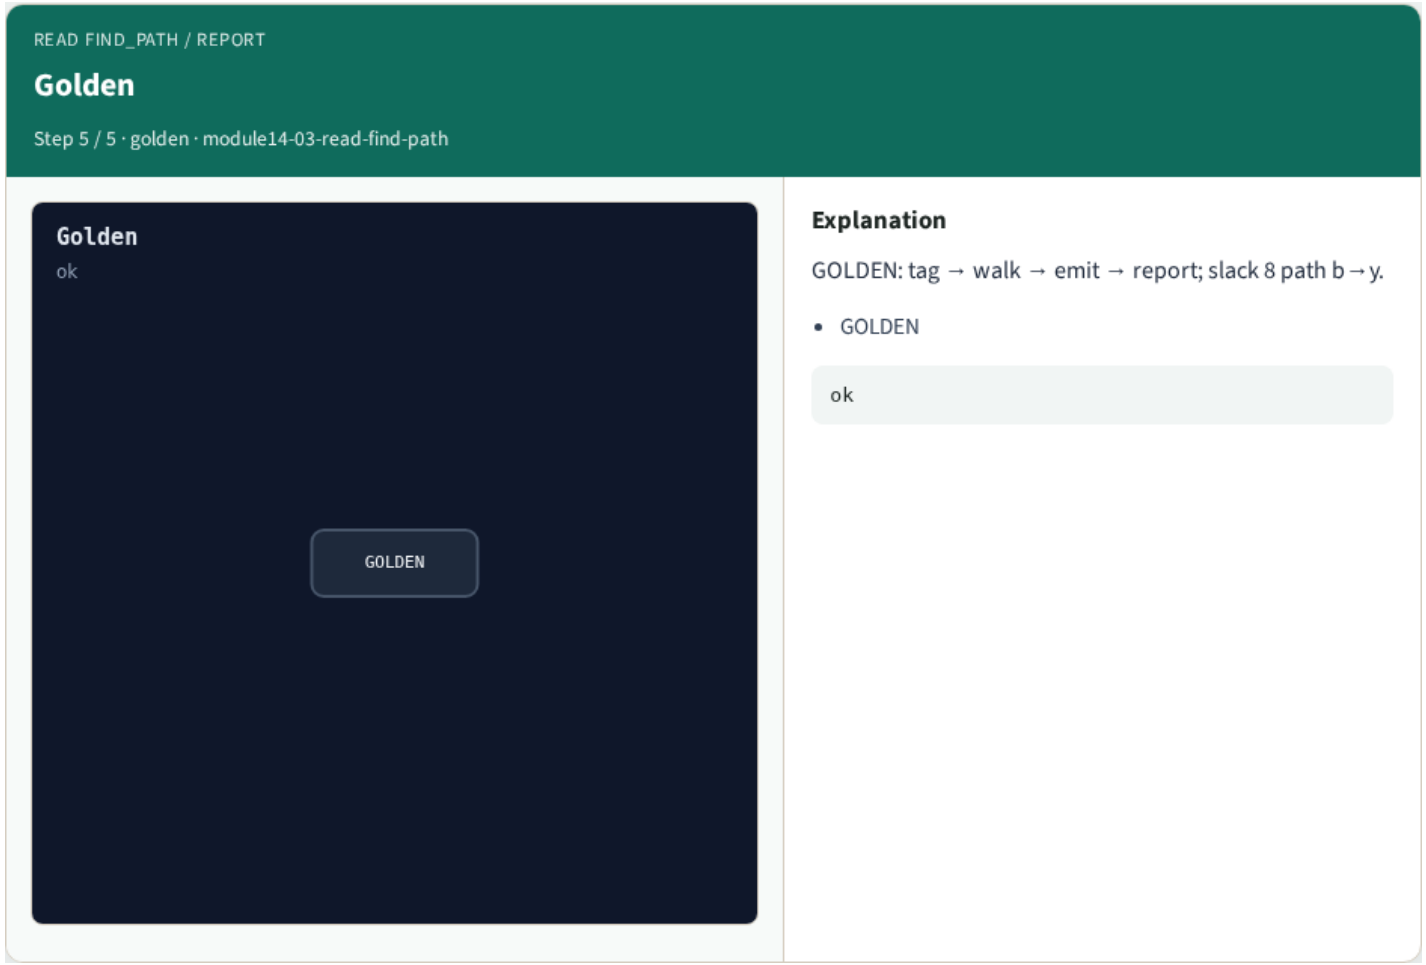

Golden

Browser lab track

- Open **read-find-path**
- Step the FindPath pipeline and check

Implement track

- Call read_find_path(); assert stage order and Part B slack bind

Pitfalls

- Expecting FindPath to replace Liberty
- Ignoring the Part B delay and slack goldens

Try these

- From the common folder, call read_find_path and print the stages

Try these — try these

```
cd courses/learn_opensta/common
python3 -c "from internals_solvers import read_find_path;
print(read_find_path())"
```

Pseudocode

- Here is the FindPath teaching flow in plain steps

Pseudocode — try these

```
tag_endpoints
walk_back from worst slack
emit_path → [b, n1, n2, y]
report_checks → delay 2, slack 8 MET
```

Next

- Complete the quiz for this part
- Next: contribute a minimal Tcl command of your own