
H-tree topology

H-trees are the classic picture of a balanced clock network on a regular array

The idea


- From the source, alternate horizontal and vertical splits toward sink groups
- Each split creates steiner points and L-shaped legs to children

Recursive H

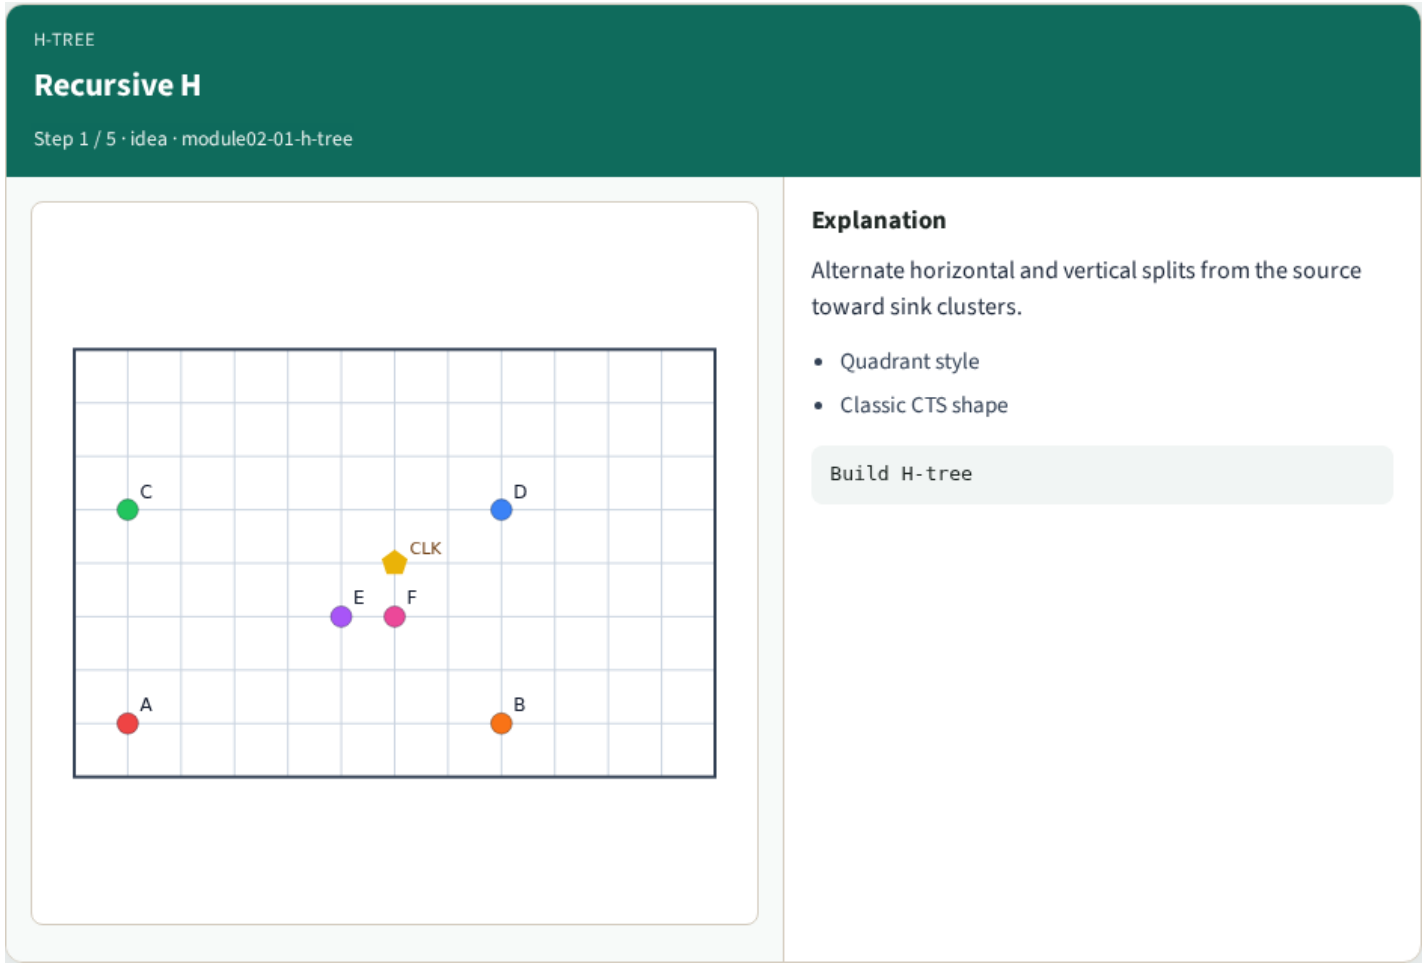


Recursive H

Built tree

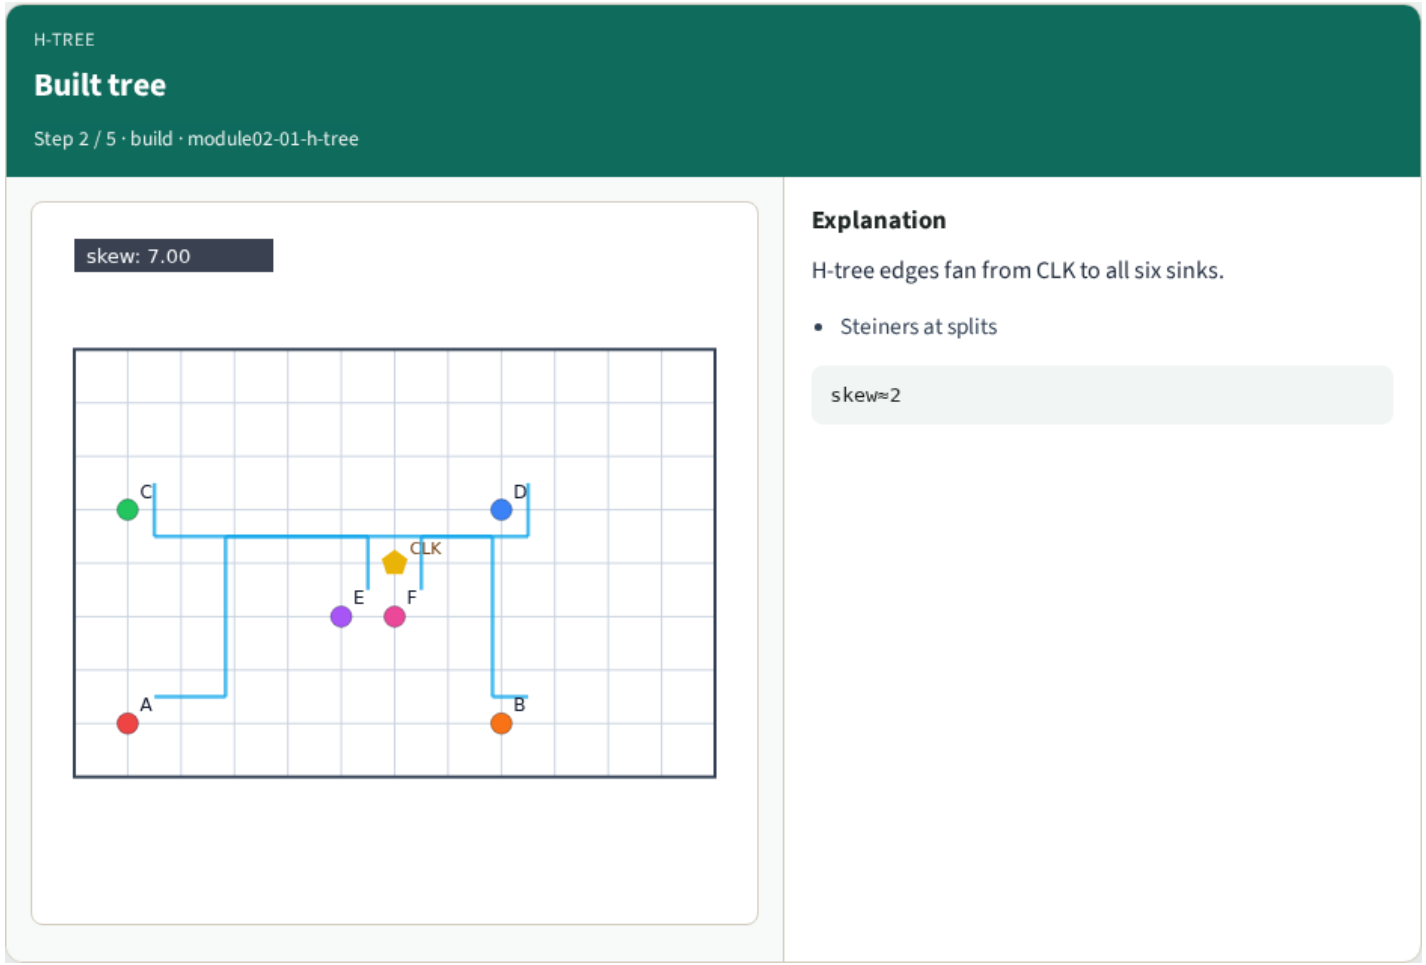


Built tree

Path highlight

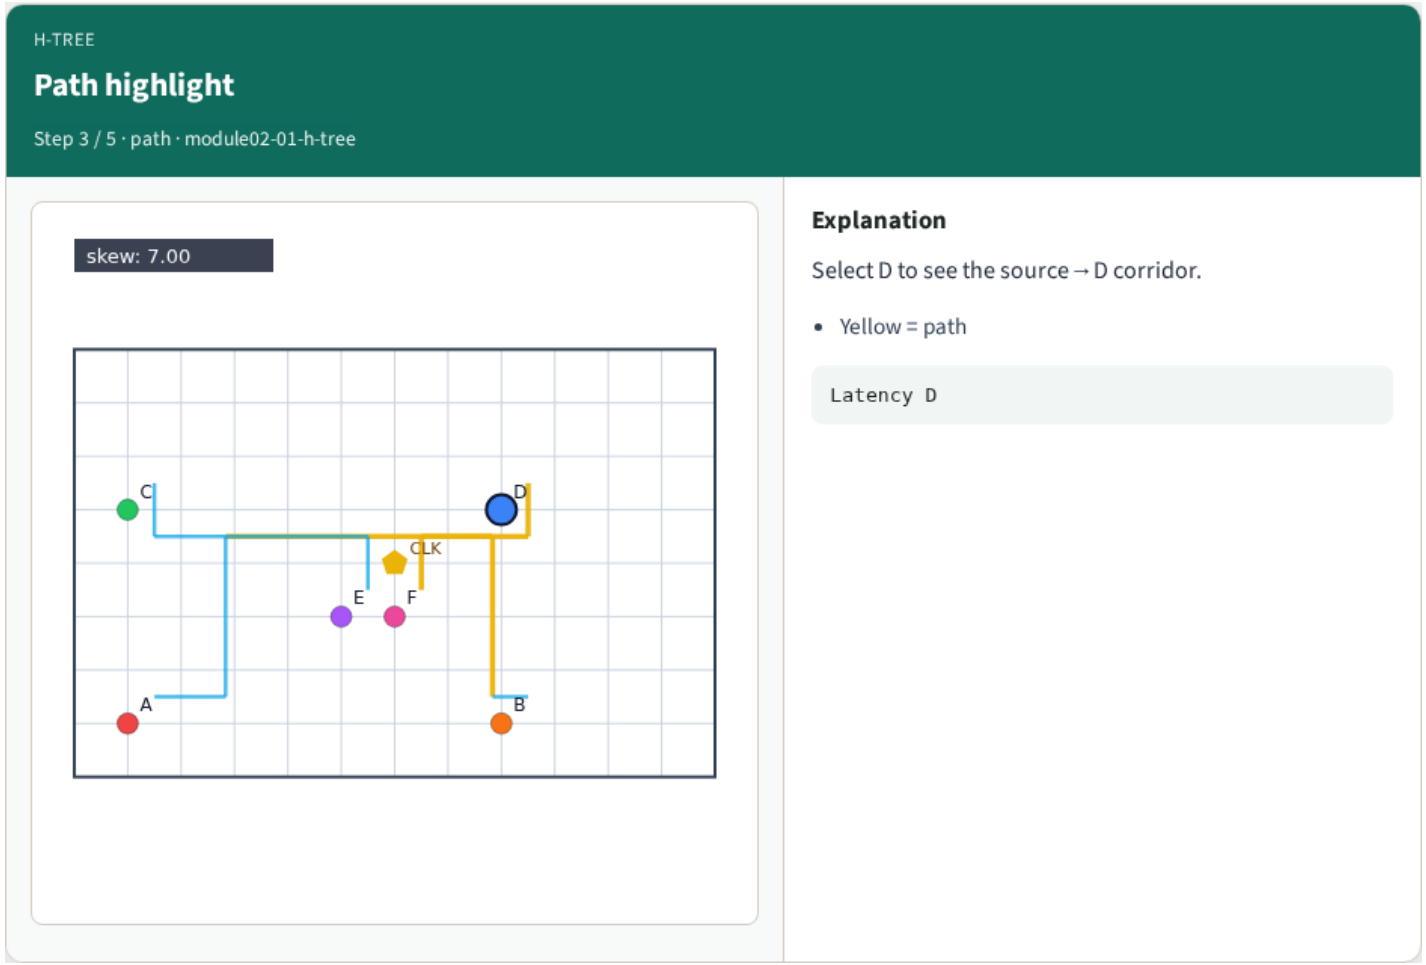

Path highlight

Balance goal

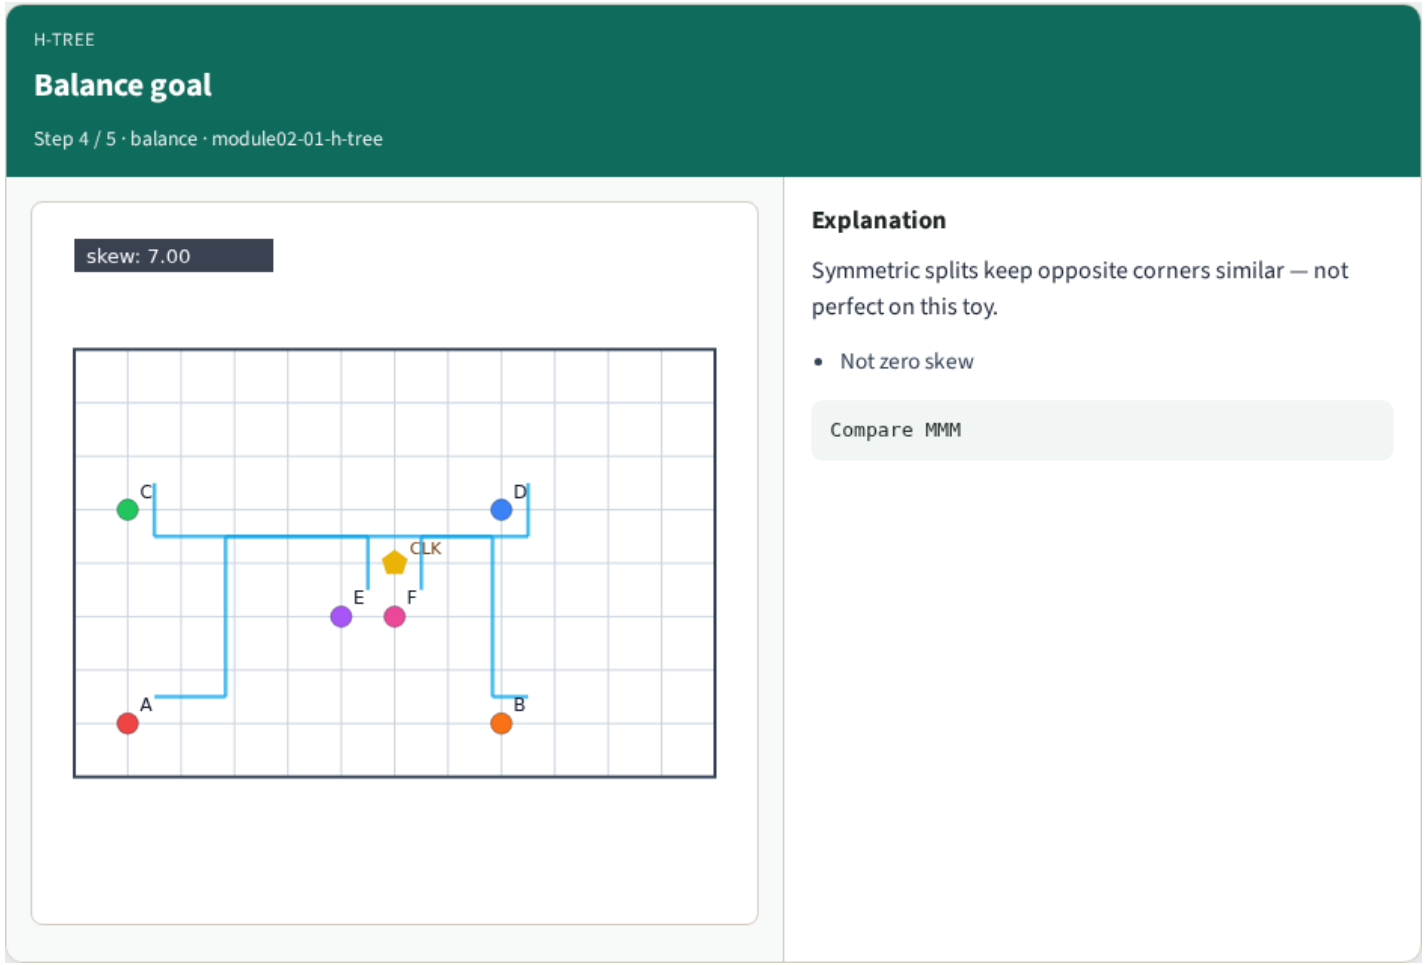


Balance goal

When H-tree

H-TREE

When H-tree

Step 5 / 5 · use · module02-01-h-tree

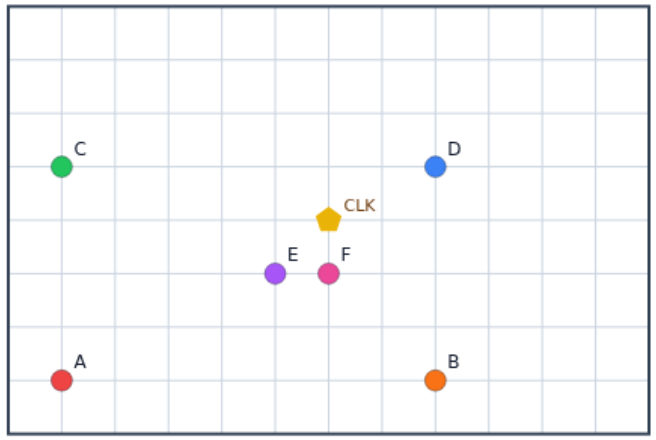

Explanation


Use H-trees when sinks fill a rectangle evenly; otherwise MMM or DME.

- Regular arrays
- Next: MMM

```
CTS toolbox
```

When H-tree

Browser lab track

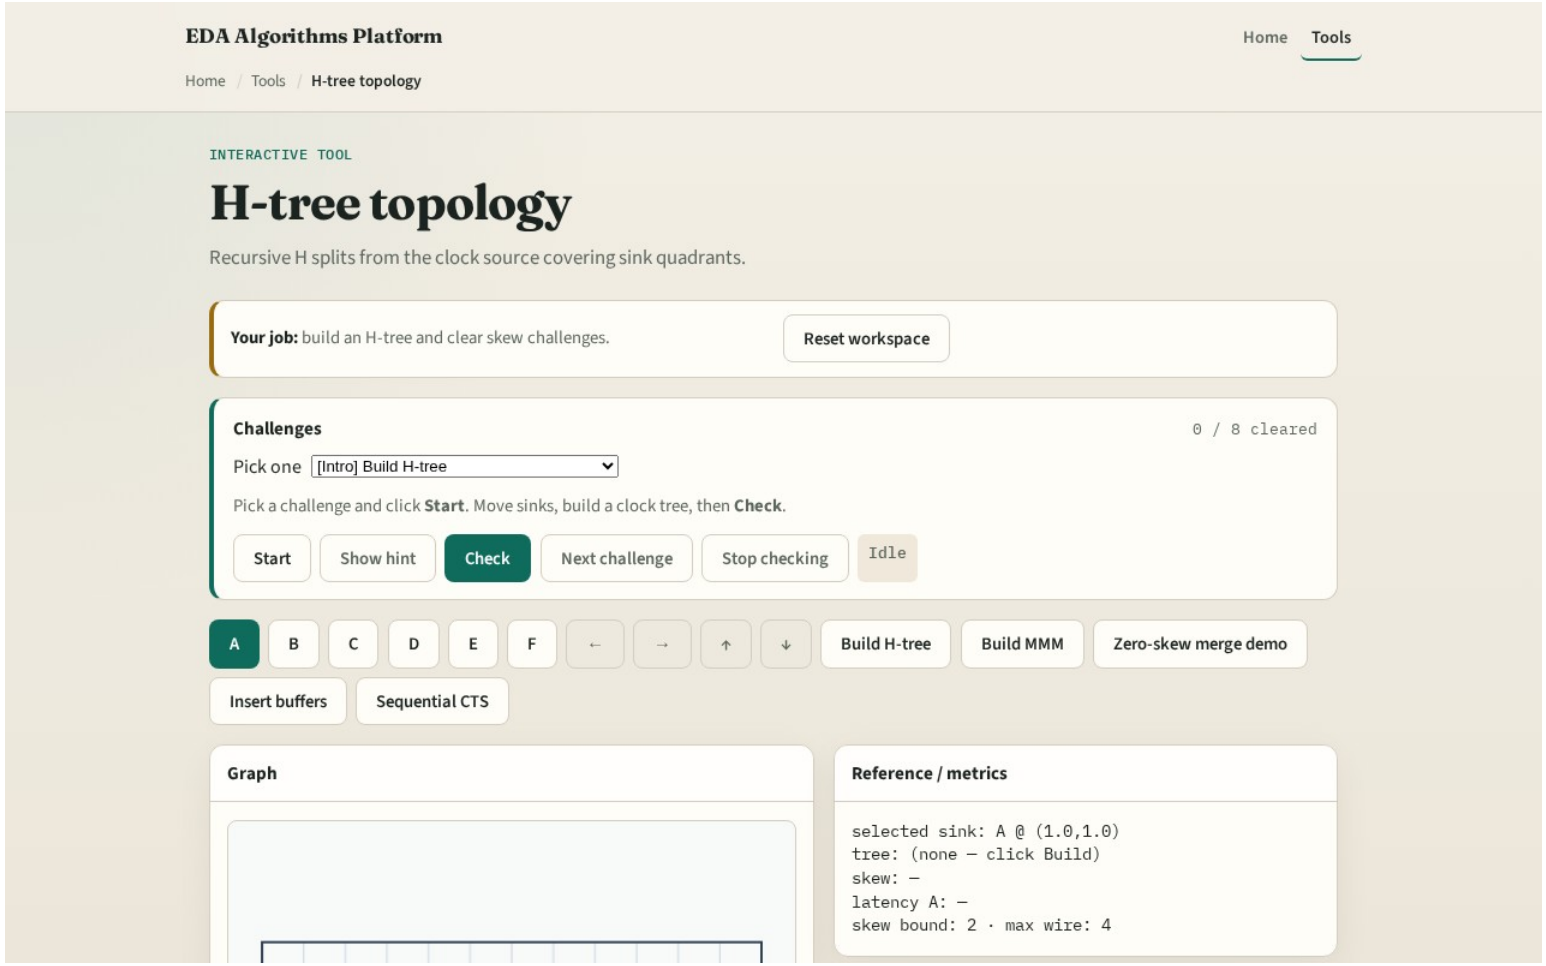

Browser lab starter

Implement track

- Call `h_tree(source, chip)` / browser `hTree(positions)`
- Attach sinks and print edge count and skew

Pitfalls

- Stopping after one H without recursion
- Connecting sinks with Euclidean edges
- Ignoring steiner points when measuring latency

Your turn

- Next: Method of Means and Medians for irregular sinks