Skew bound with buffers

Signoff asks: is skew under budget?

The idea


- Skew_bound_ok is true when skew ≤ bound
- Zero-skew merge often meets bound two on the toy

Target bound

SKEW BOUND

Target bound

Step 1 / 5 · bound · module03-03-skew-bound

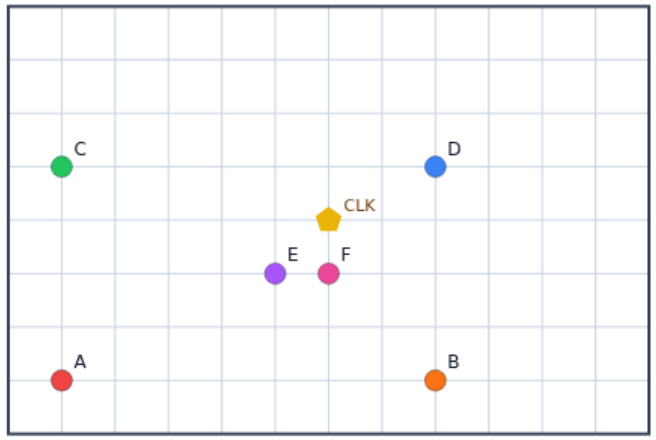

Explanation


Challenges ask skew ≤ GOLDENS.skewBoundDefault (2) on the toy.

- Pass/fail
- skewBoundOk

```
bound=2
```


Target bound

Zero-skew helps

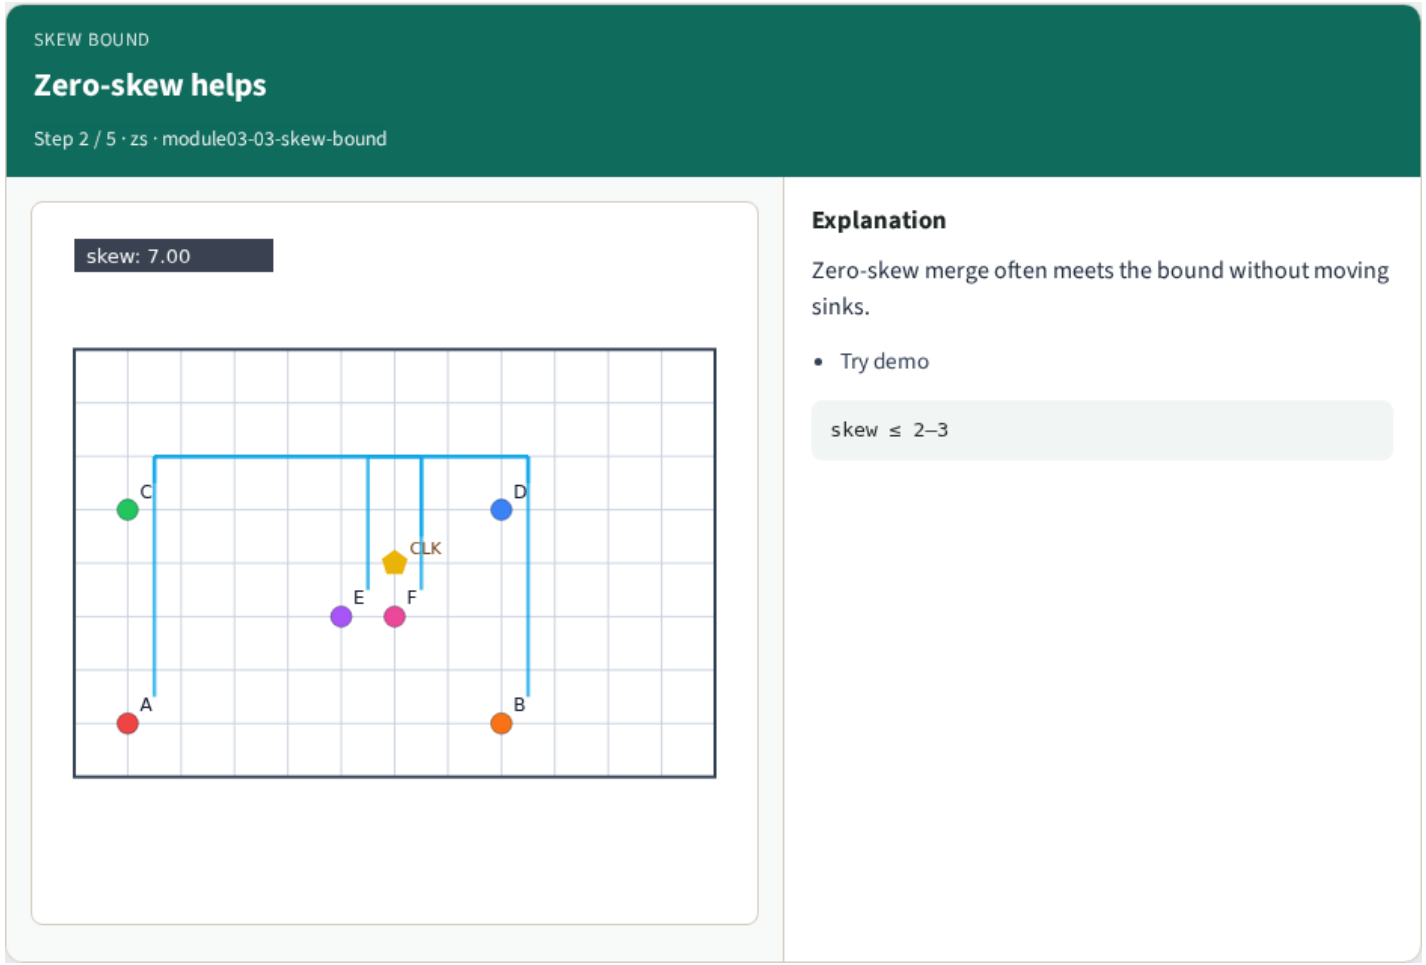


Zero-skew helps

H may miss

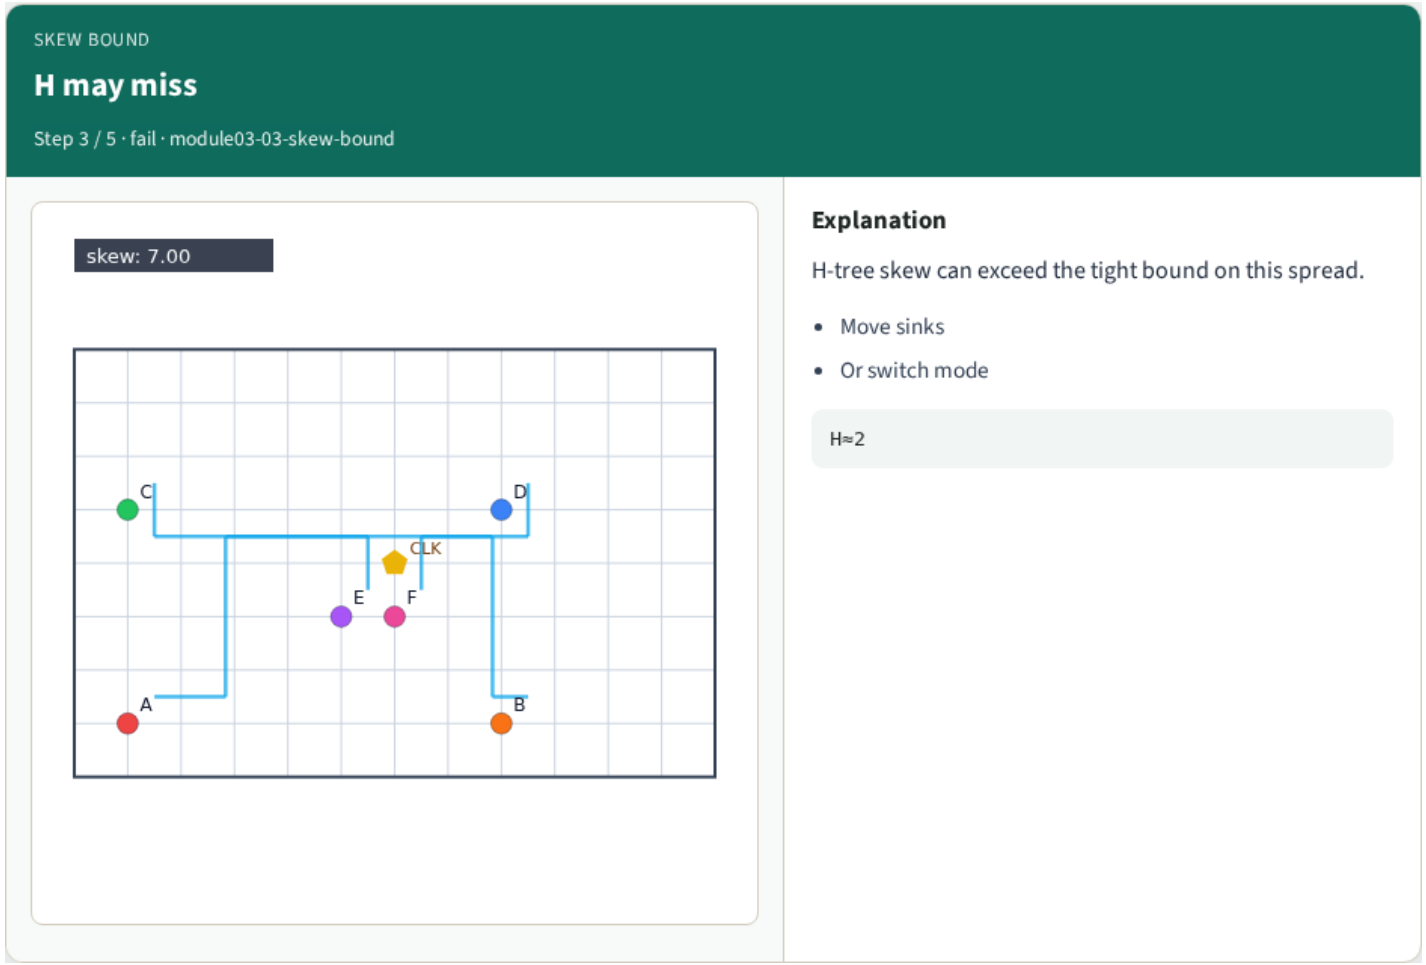

H may miss

Buffers + bound

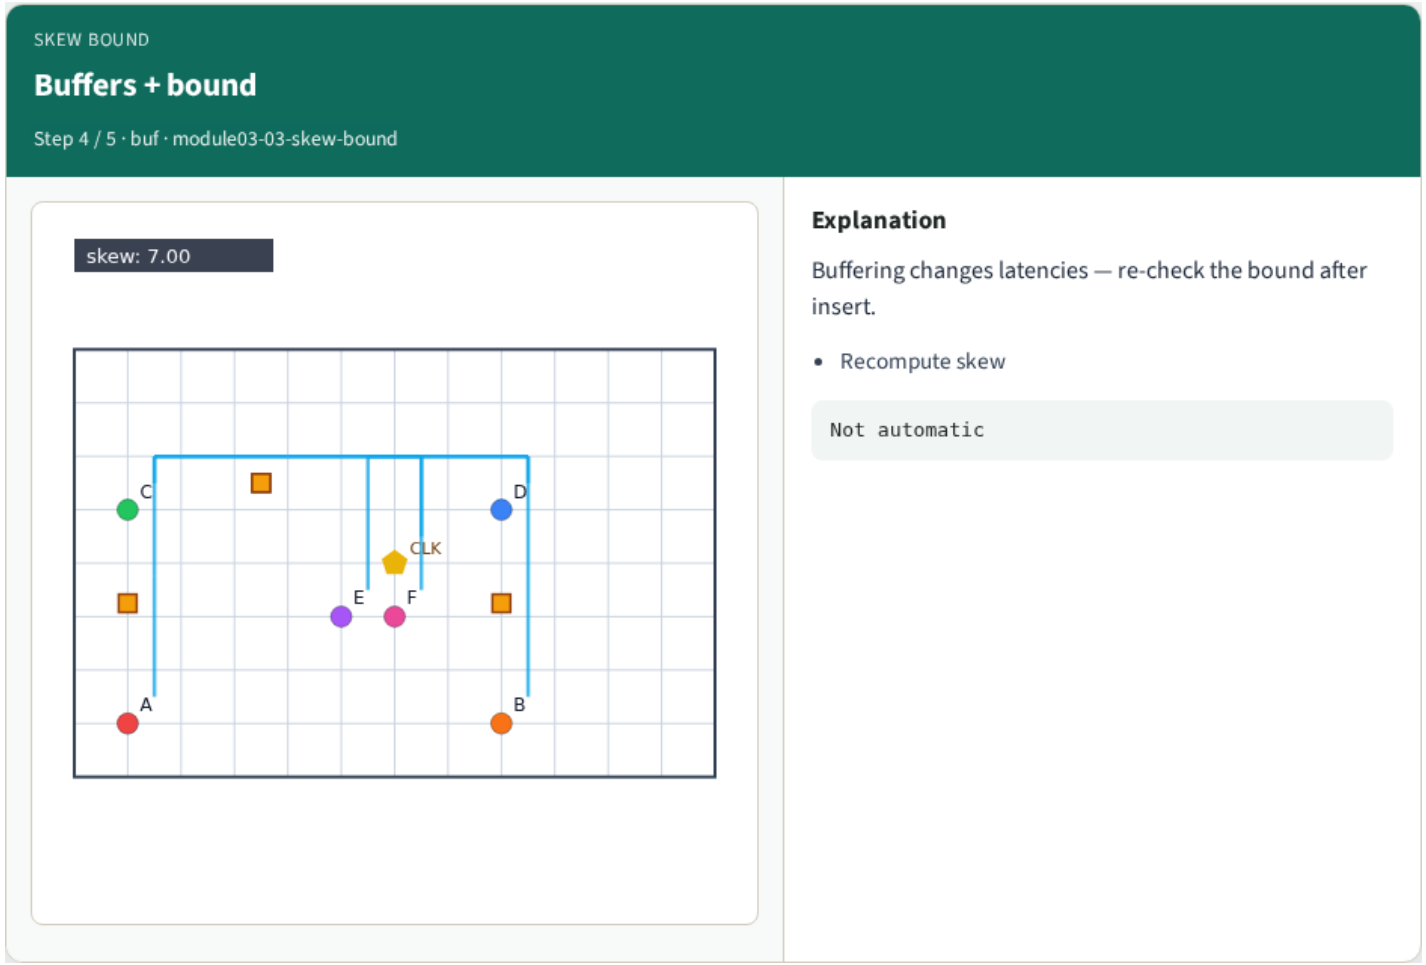


Buffers + bound

Toward signoff

SKEW BOUND

Toward signoff

Step 5 / 5 · signoff · module03-03-skew-bound

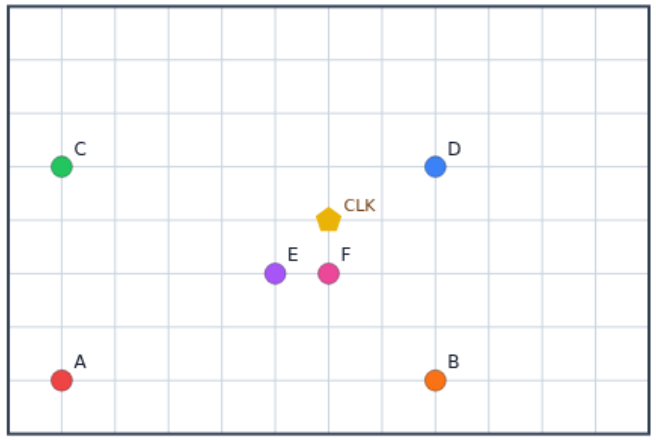

Explanation


Real CTS targets skew under corners; this lab is the scalar habit.

- learn_buffering
- learn_sta

```
Next: sequential
```

Toward signoff

Browser lab track

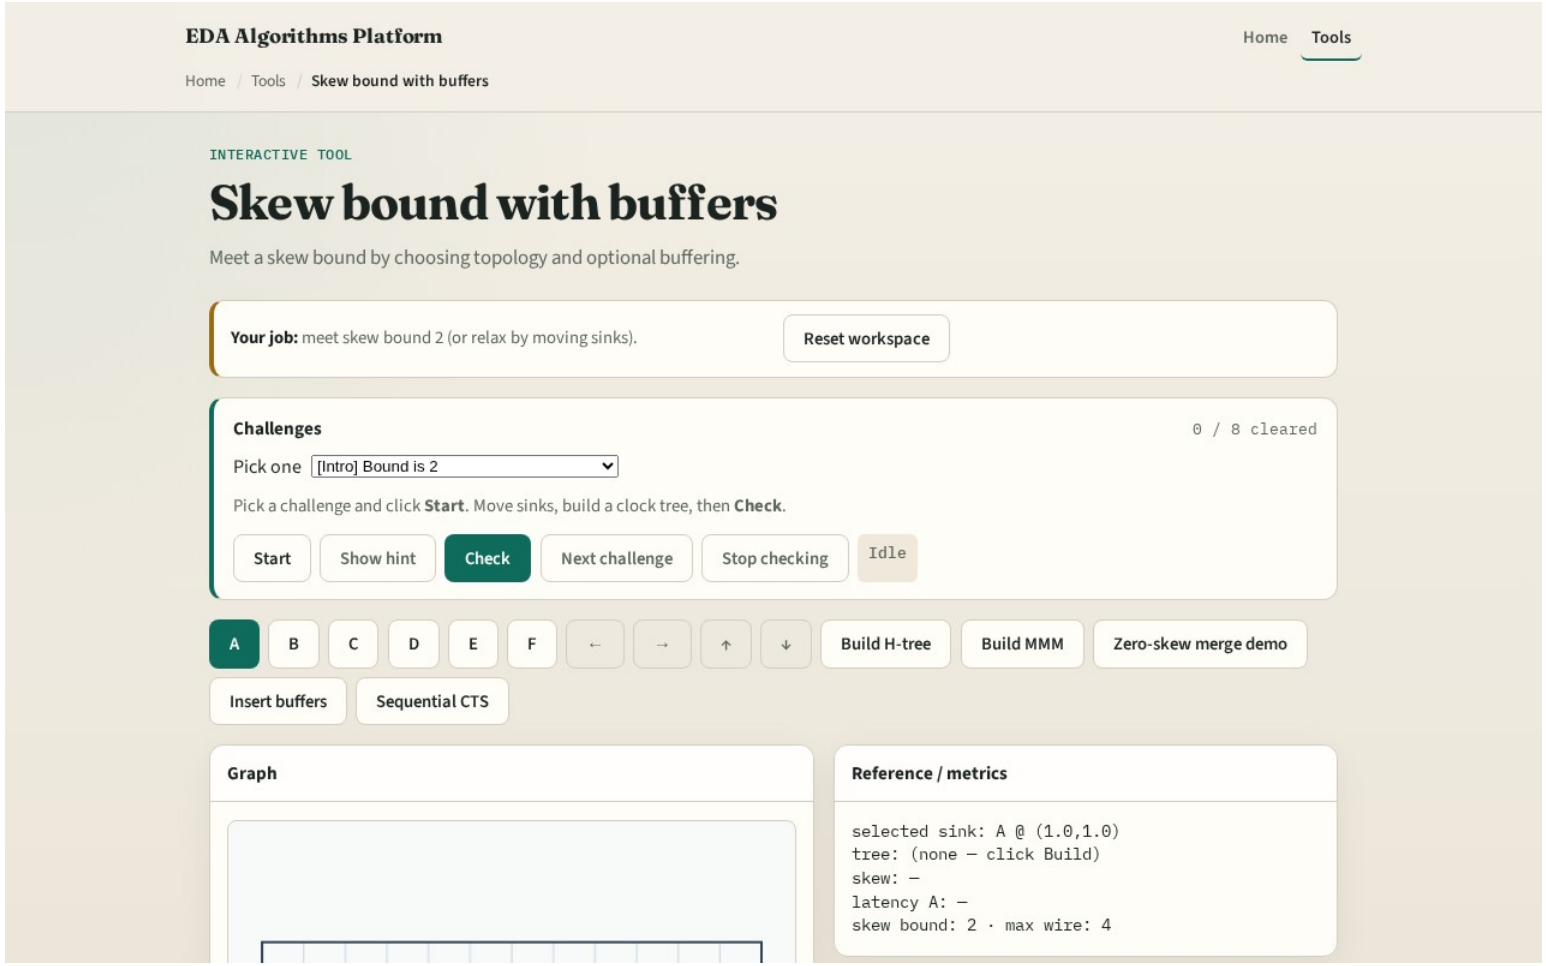

Browser lab starter

Implement track

- Call `skew_bound_ok(latencies, bound)`
- Document GOLDENS.skewBoundDefault = 2

Pitfalls

- Hard-coding pass without measuring
- Forgetting to rebuild after moving sinks
- Mixing buffered and unbuffered latencies

Your turn

- Next: sequential CTS connecting sinks in order