
Why real OpenSTA

Invoke sta -exit script.tcl; recipe starts read_liberty→read_verilog→link_design

The idea


- GOLDEN: First three cmds: read_liberty, read_verilog, link_design

sta -exit

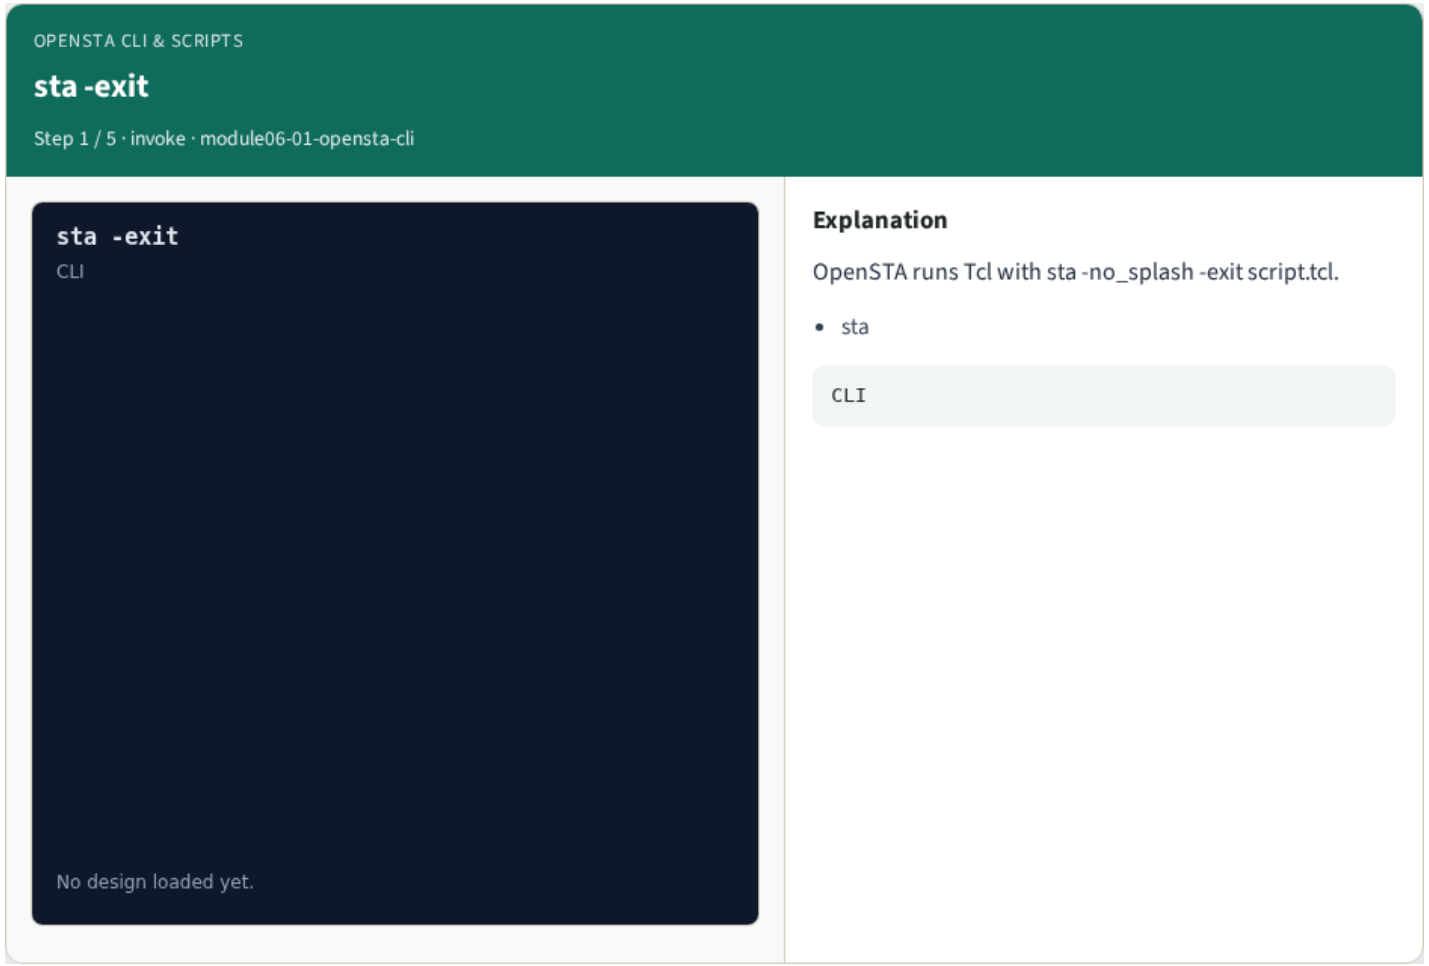


sta -exit

read_liberty

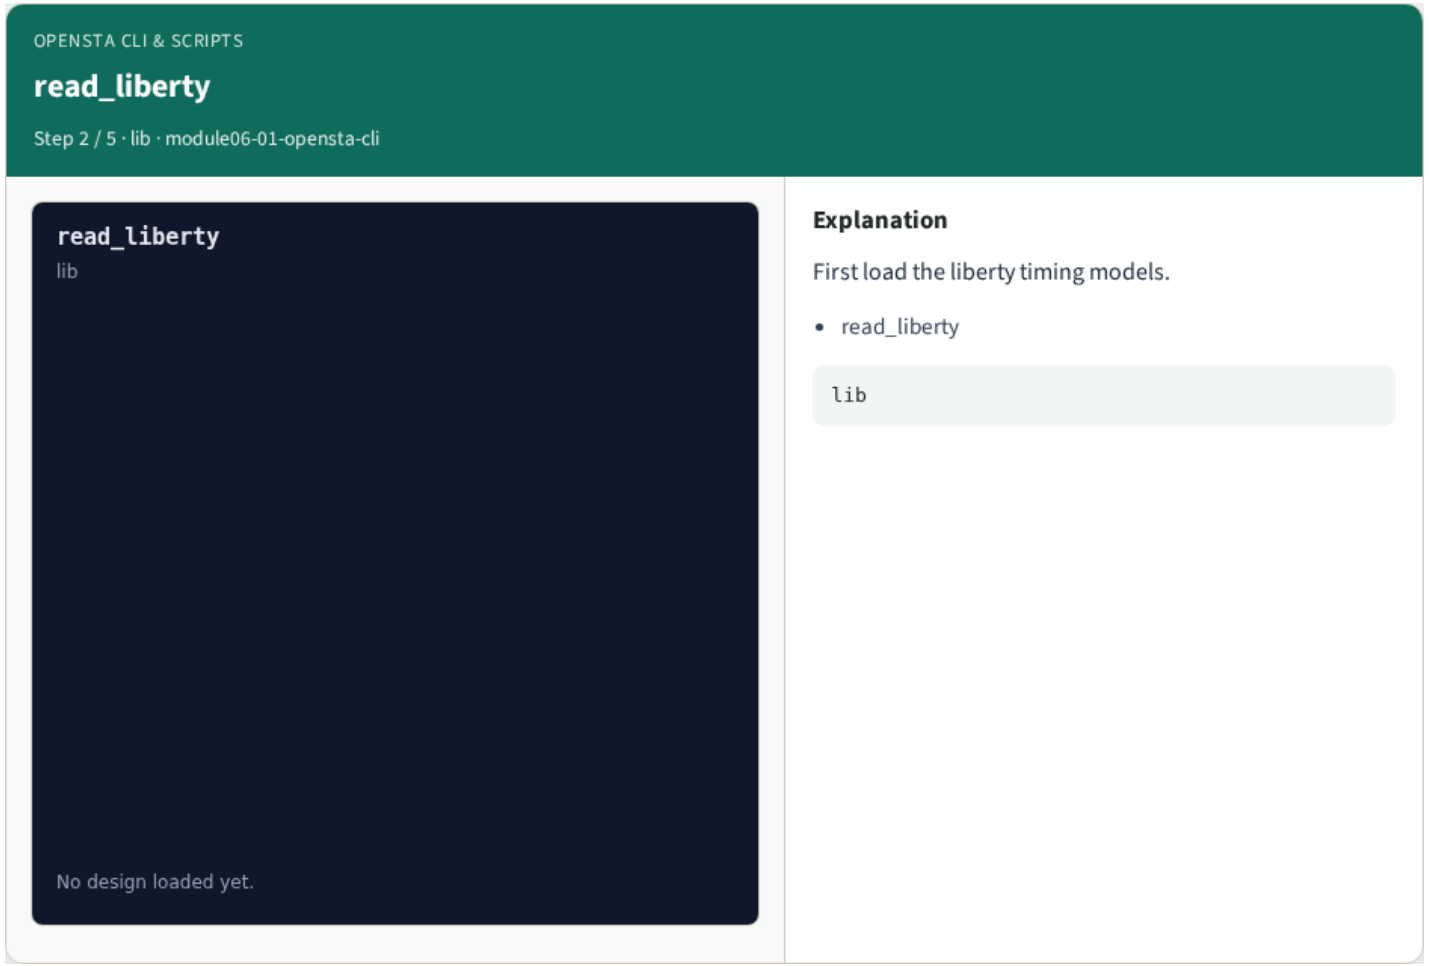


read_liberty

read_verilog

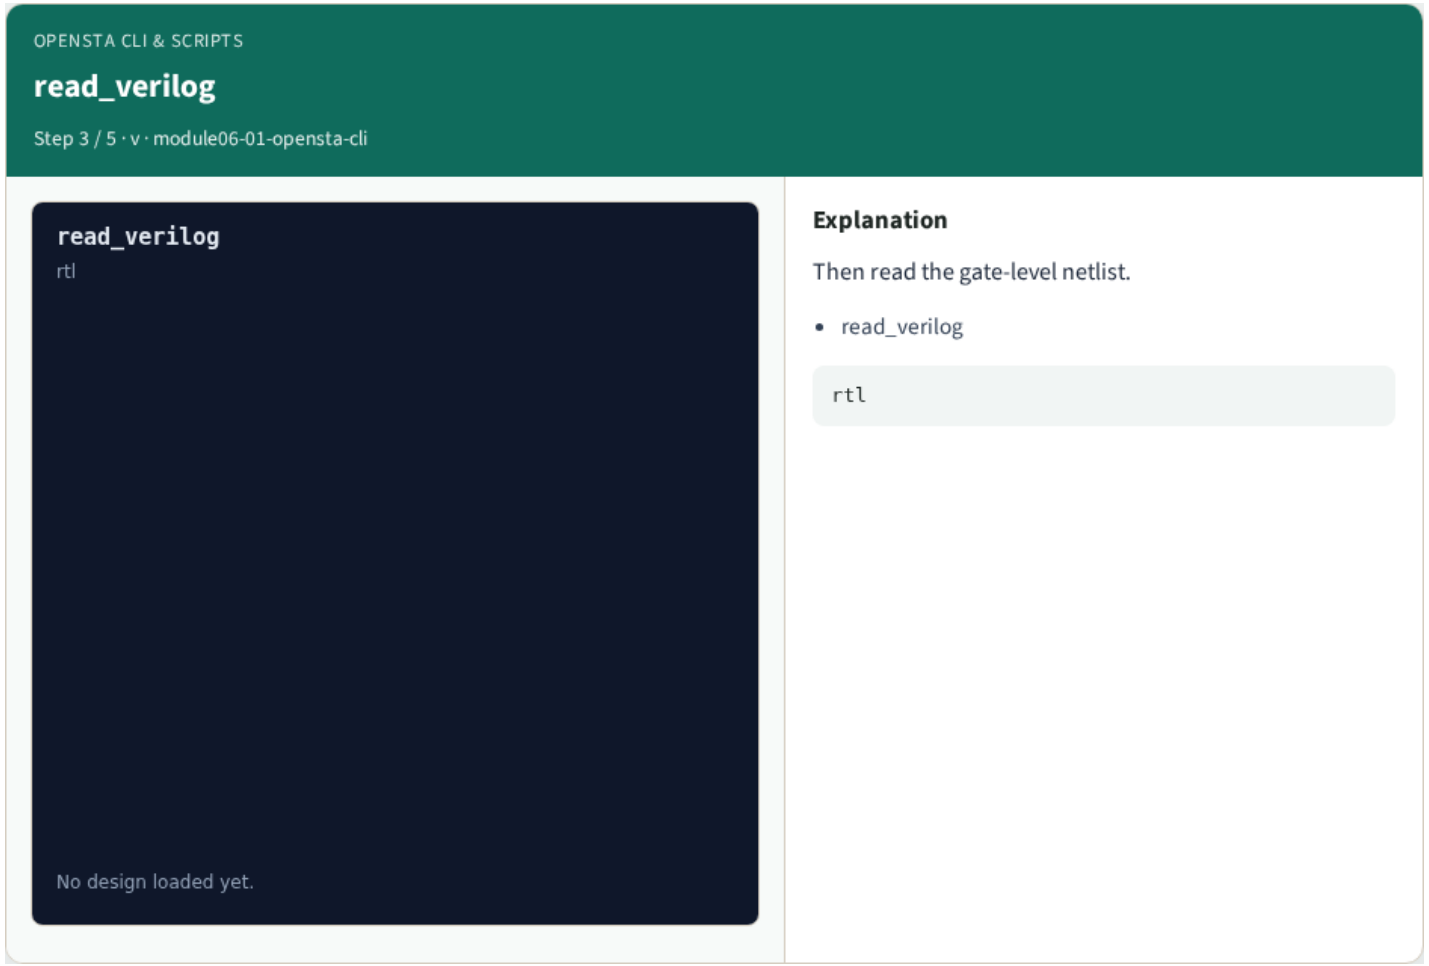


read_verilog

link_design

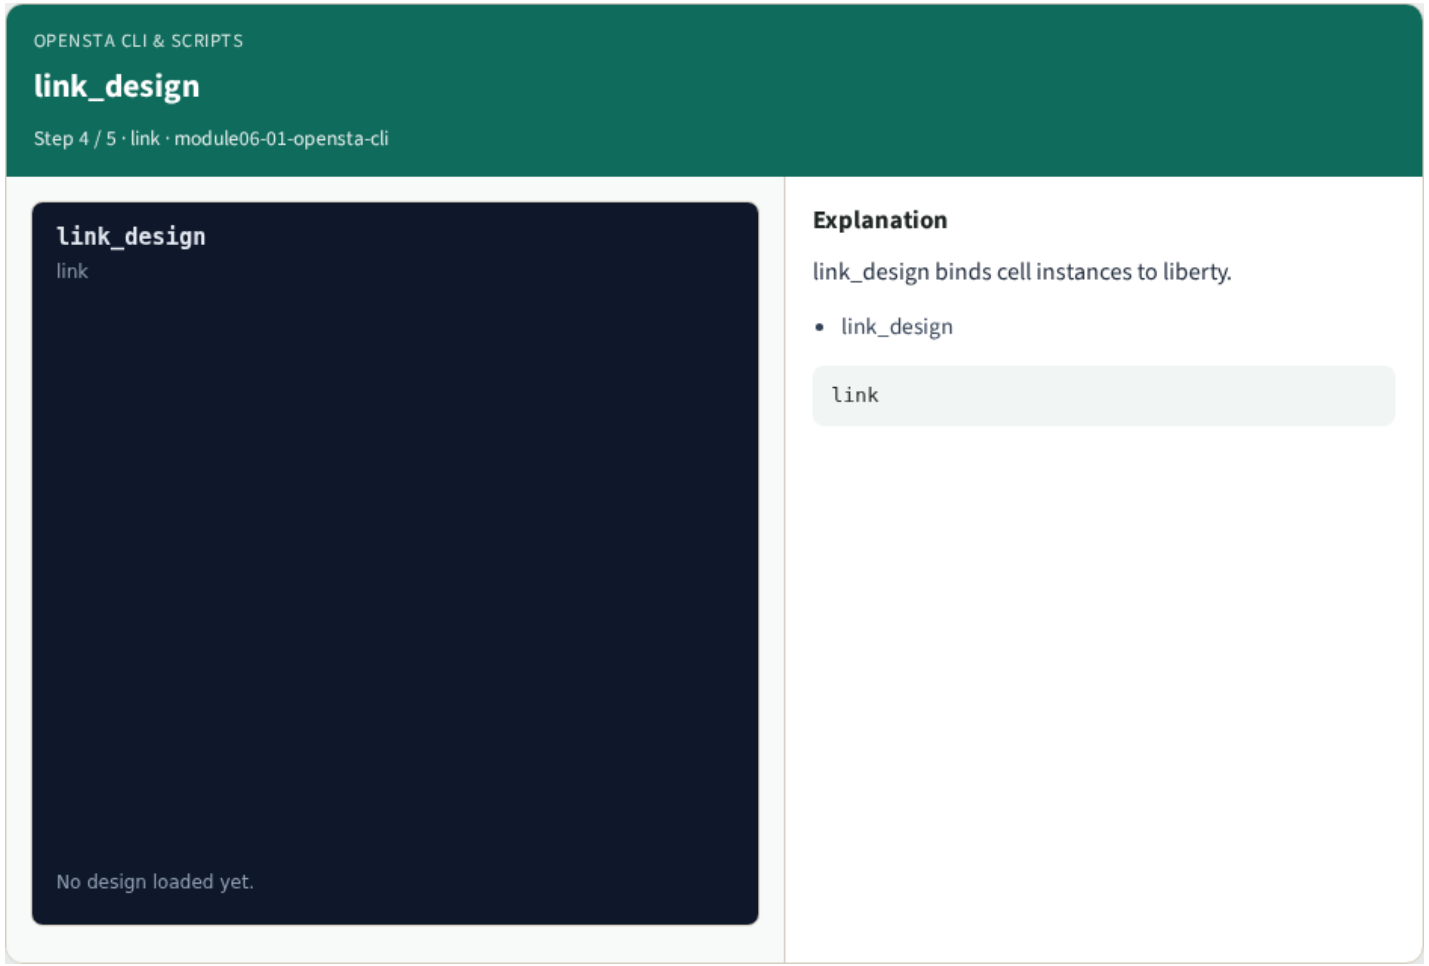

link_design

Golden

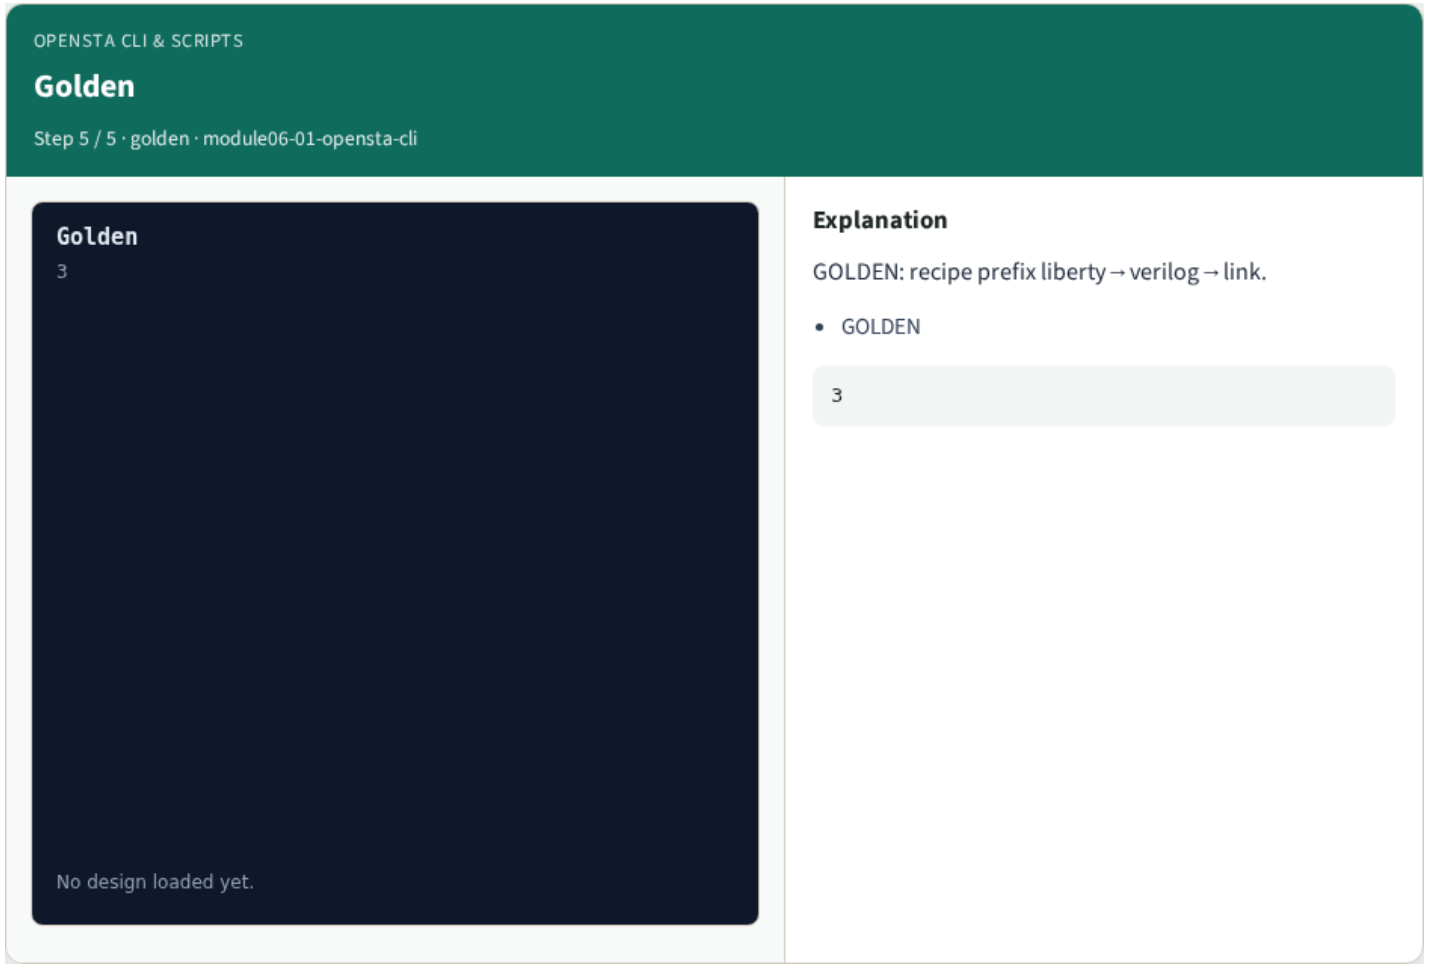

Golden

Browser lab track

- Open **opensta-cli**
- Build the Tcl recipe or open evidence stages, then Check

Implement track

- From common/, run real_solvers.py and confirm REAL_OPENSTA_OK

Pitfalls

- Editing goldens by hand without re-running sta
- Confusing Part A map JSON with real liberty delays

Try these

- From the common folder, run the real OpenSTA self-test

Try these — try these

```
cd courses/learn_opensta/common
python3 real_solvers.py
```

Pseudocode

- Here is the check in plain steps

Pseudocode — try these

```
First three cmds: read_liberty, read_verilog, link_design.
ok if goldens match
```

Next

- Complete the quiz for this part
- Continue the Part B evidence track, then wrap , algorithms and internals come later