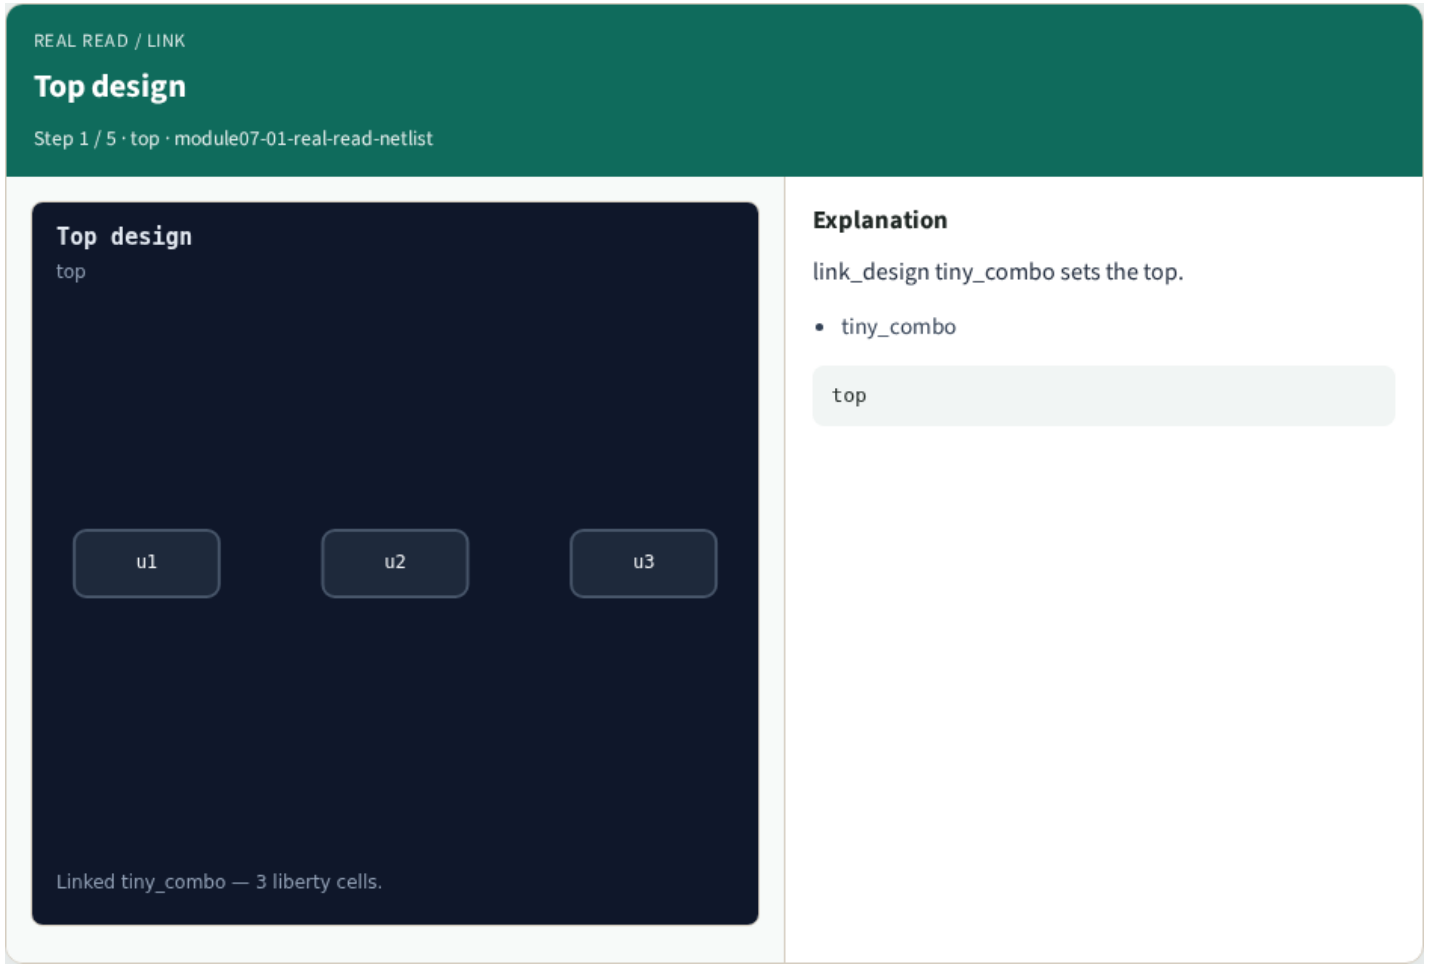
# Why real OpenSTA

Link tiny_combo and see instances u1/u2/u3

# The idea

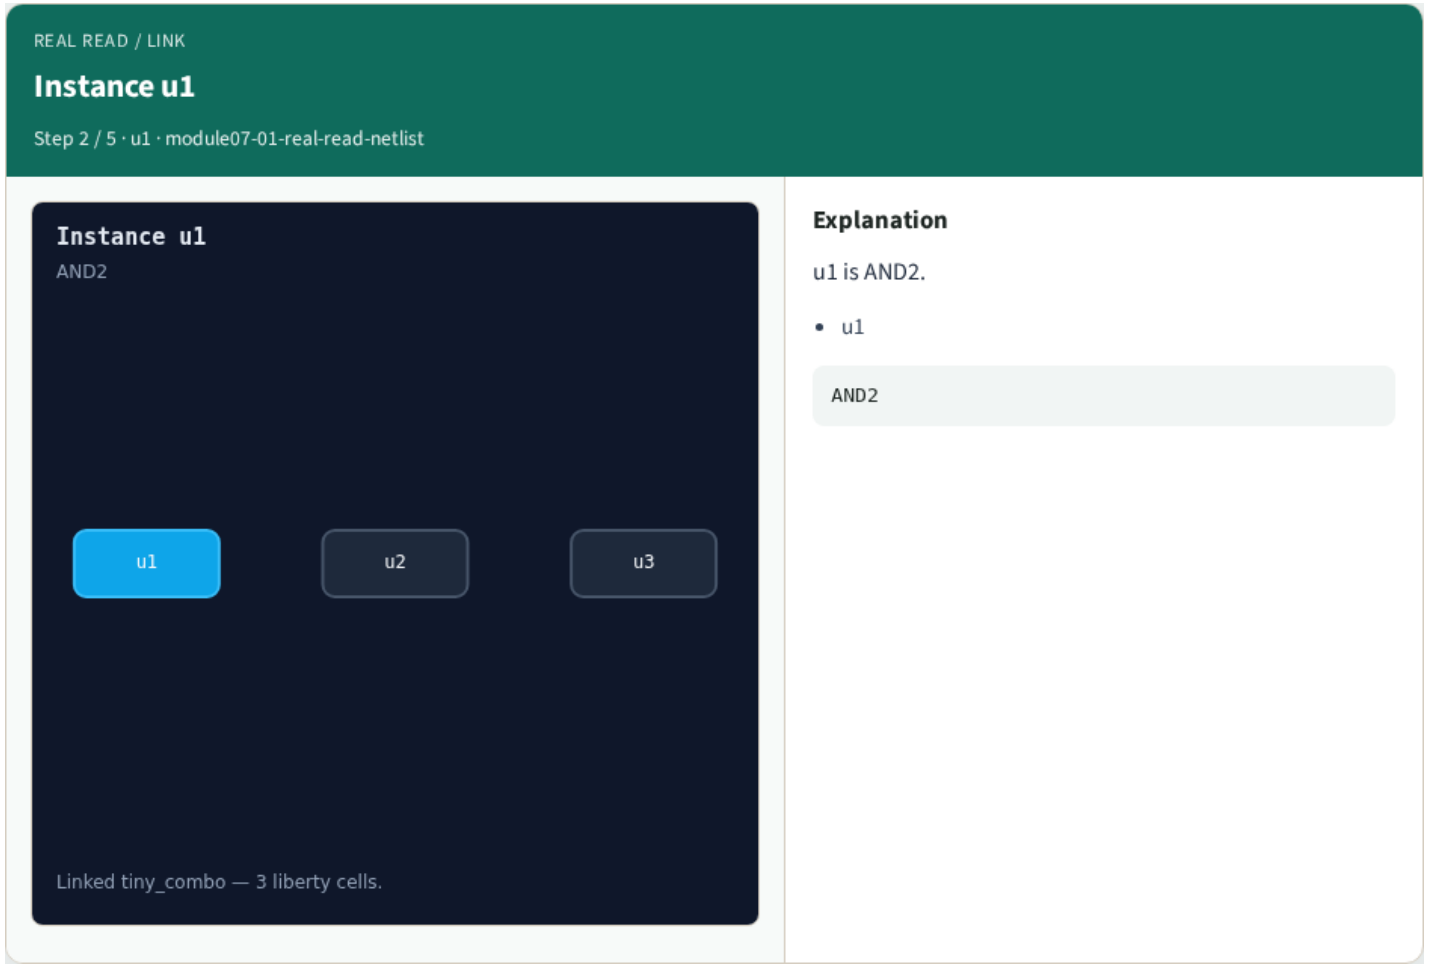
- GOLDEN: top=tiny_combo; cells u1,u2,u3

# Top design



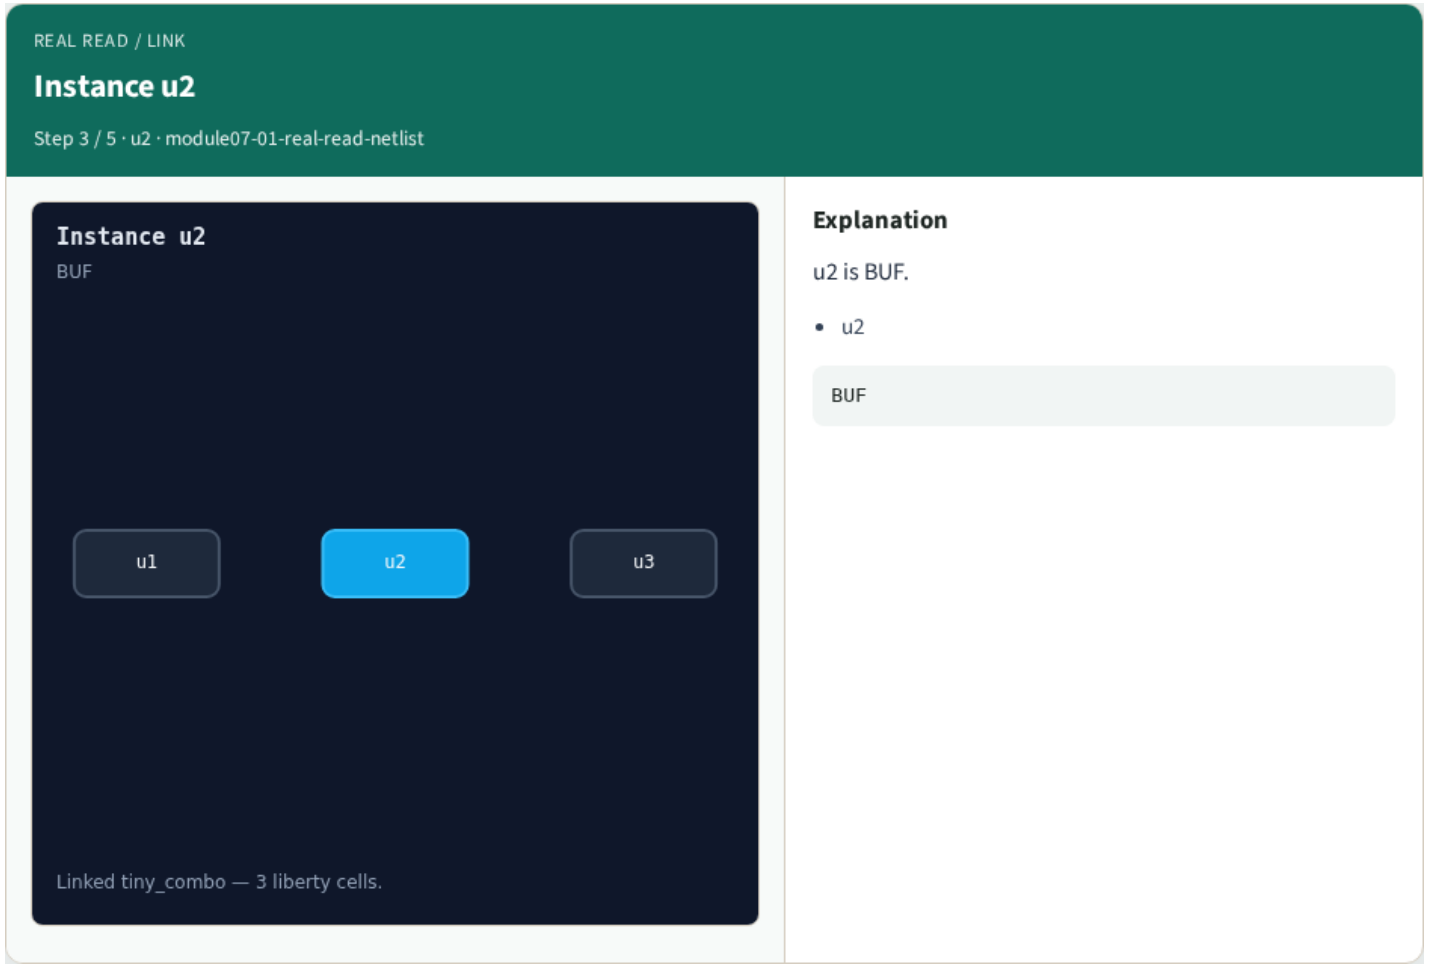

Top design

# Instance u1



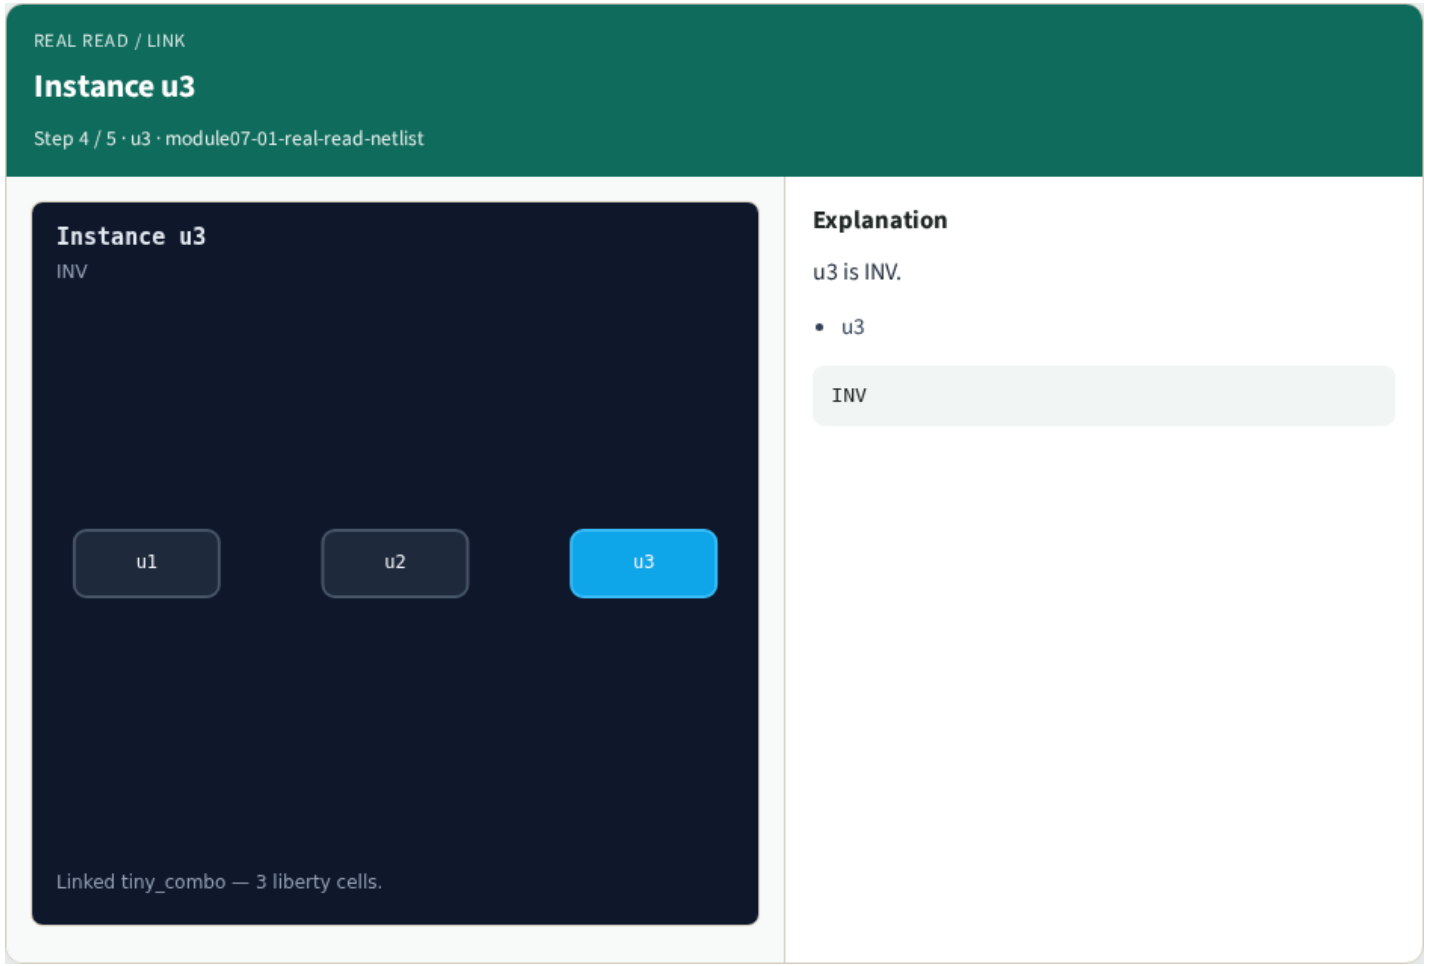

Instance u1

# Instance u2



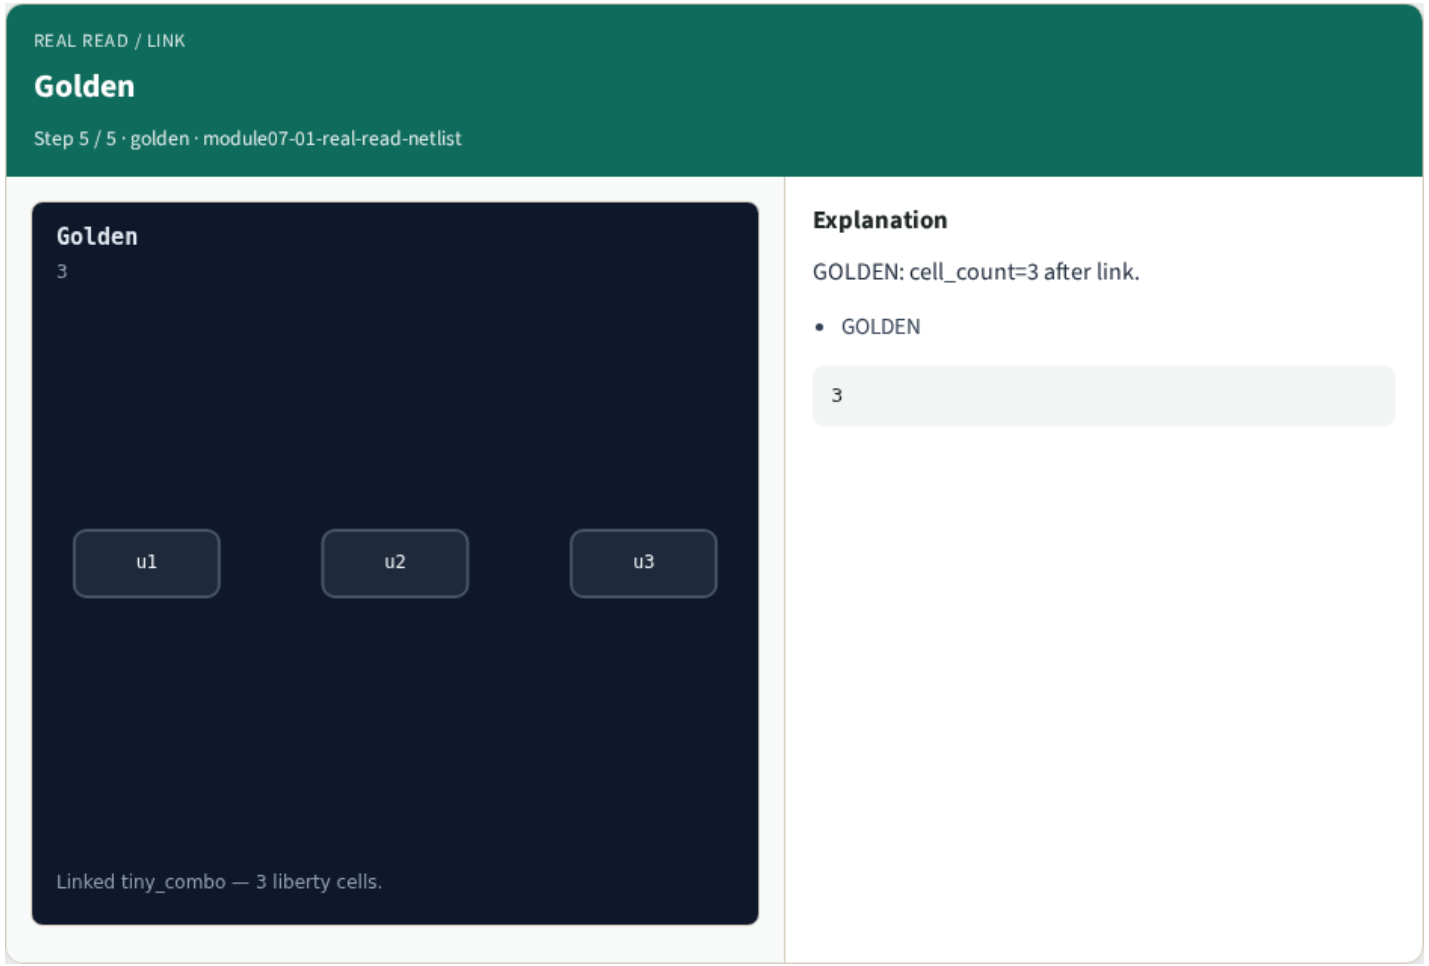

Instance u2

# Instance u3




Instance u3

# Golden




Golden

# Browser lab track

- Open **real-read-netlist**
- Build the Tcl recipe or open evidence stages, then Check

# Implement track

- From common/, run real_solvers.py and confirm REAL_OPENSTA_OK

# Pitfalls

- Editing goldens by hand without re-running sta
- Confusing Part A map JSON with real liberty delays

# Try these

- From the common folder, run the real OpenSTA self-test

# Try these — try these

```
cd courses/learn_opensta/common
python3 real_solvers.py
```

# Pseudocode

- Here is the check in plain steps

# Pseudocode — try these

```
top=tiny_combo; cells u1,u2,u3.
ok if goldens match
```

# Next

- Complete the quiz for this part
- Continue the Part B evidence track, then wrap , algorithms and internals come later