Why real OpenSTA

Read real report_checks path delay and slack

The idea

- GOLDEN: endpoint y; delay 2.0; slack 8.0 MET

report_checks

REAL REPORT_CHECKS

report_checks

Step 1 / 5 · cmd · module08-01-real-report-checks



Explanation


report_checks -path_delay max prints the worst path.

- report_checks

```
cmd
```


report_checks

Startpoint

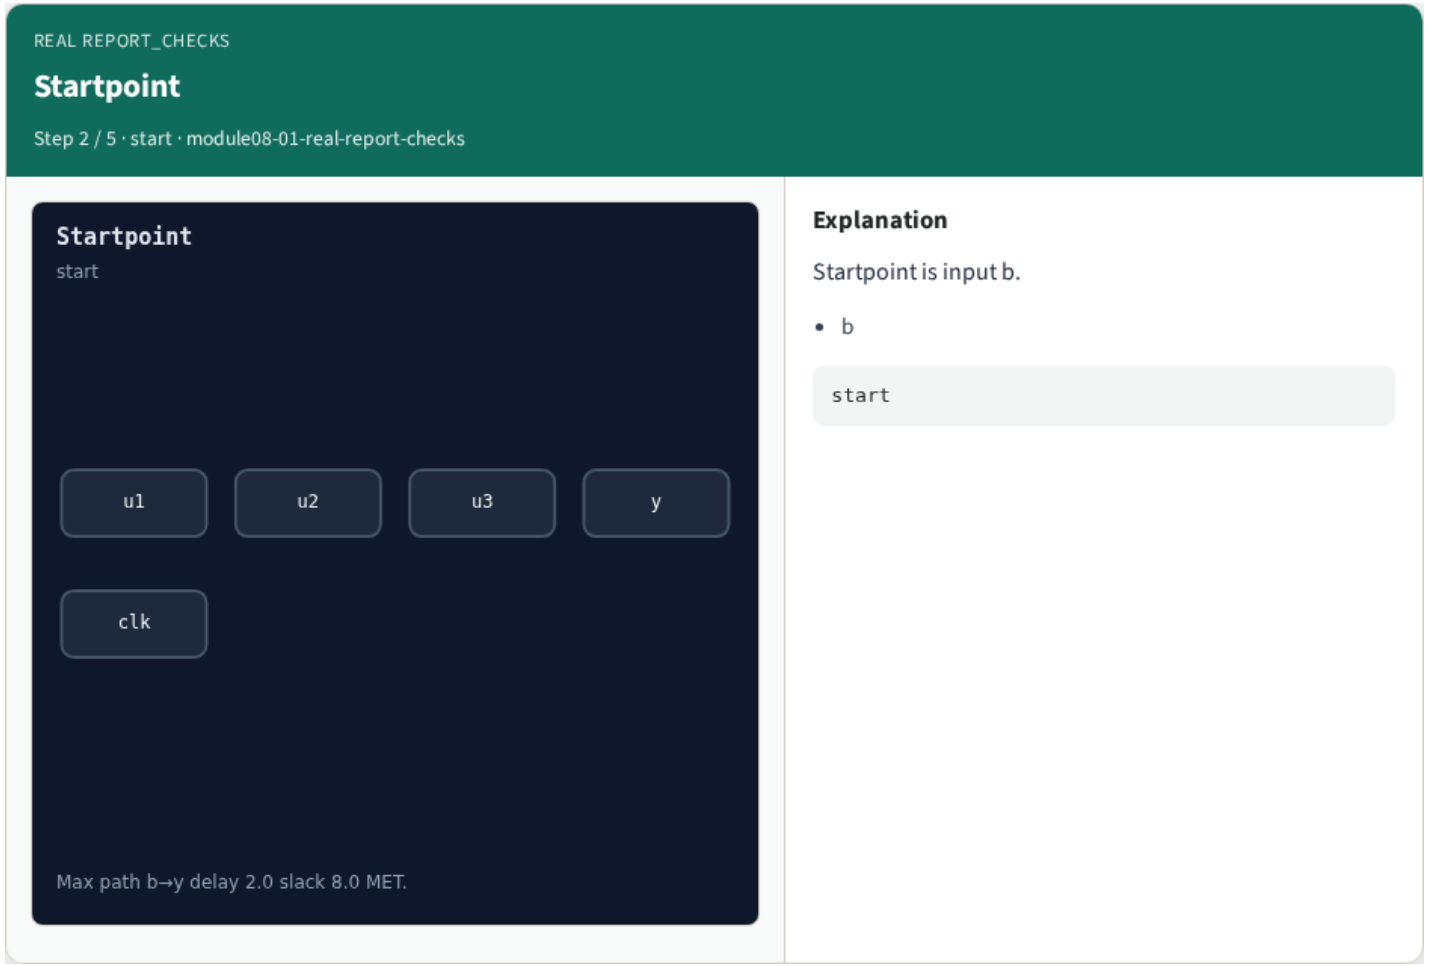


Startpoint

Endpoint

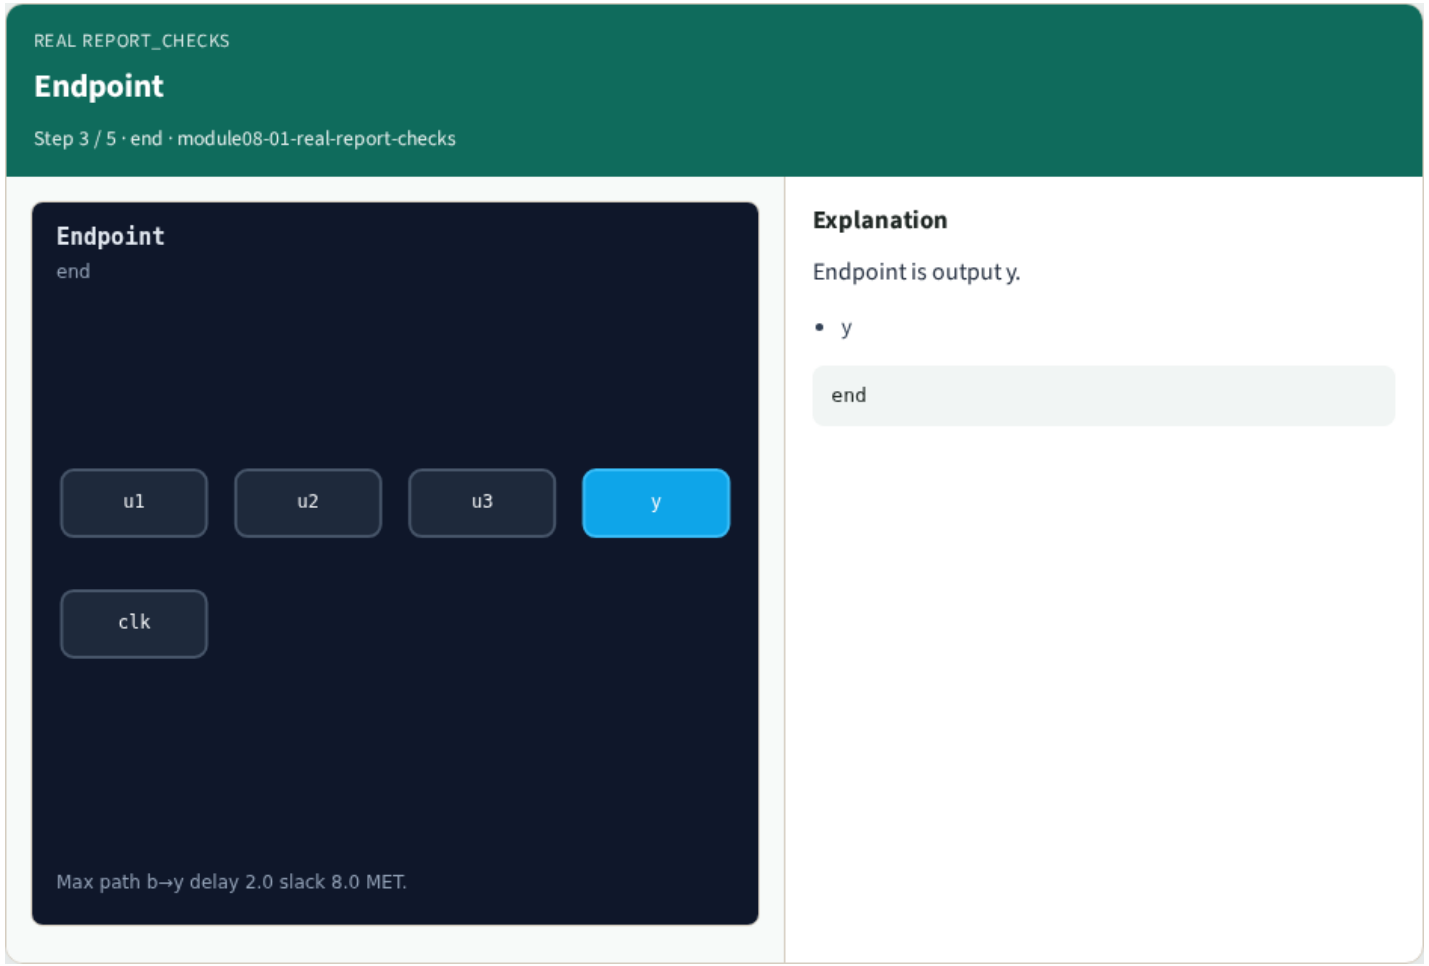


Endpoint

Slack MET

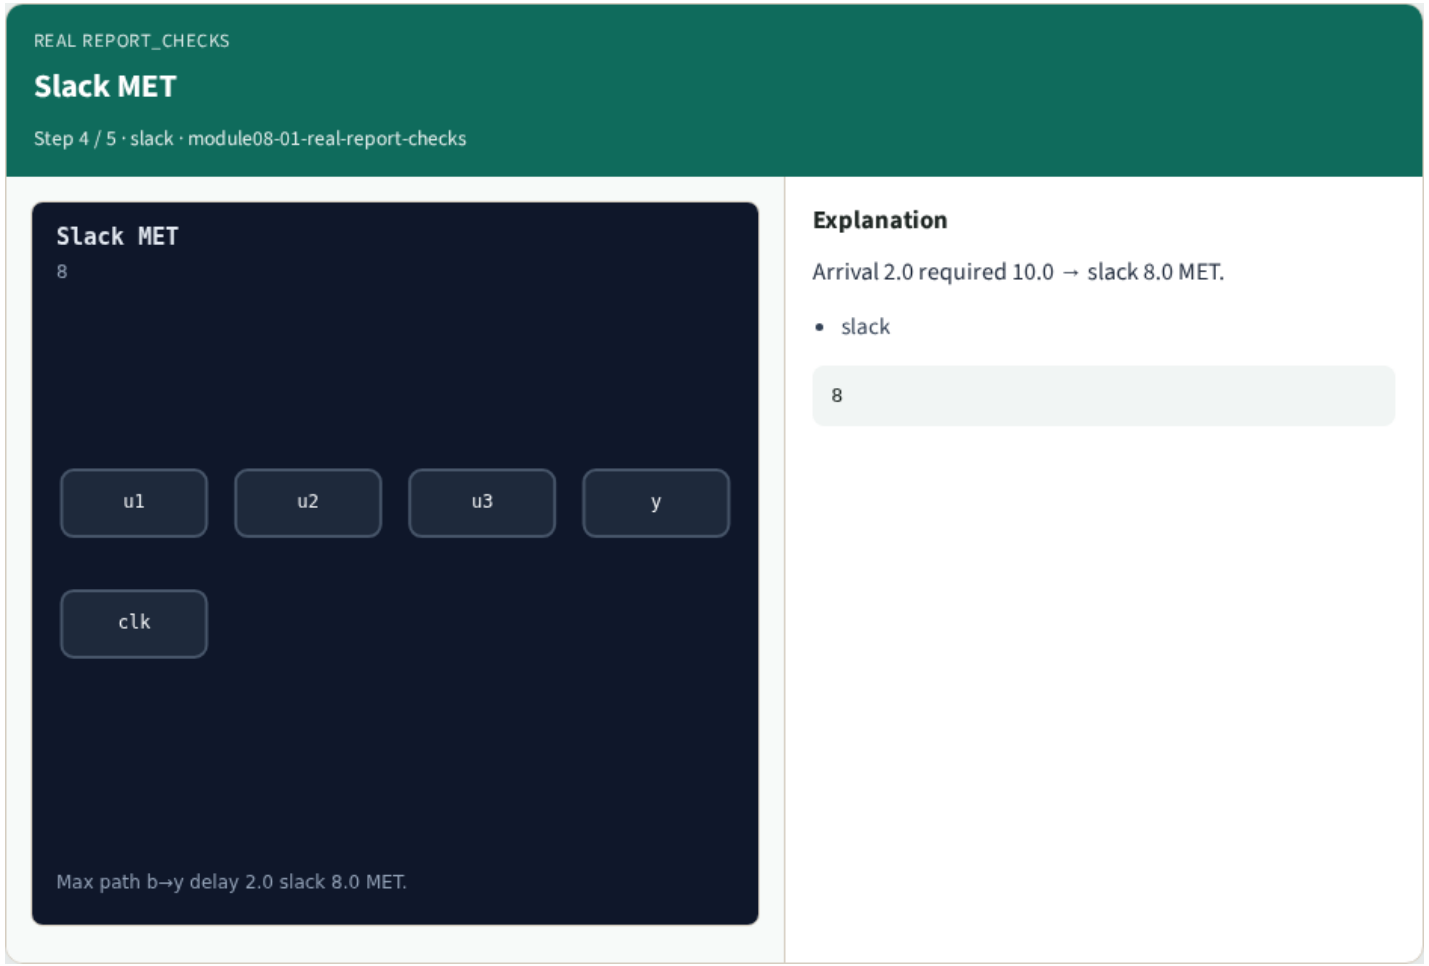

Slack MET

Golden

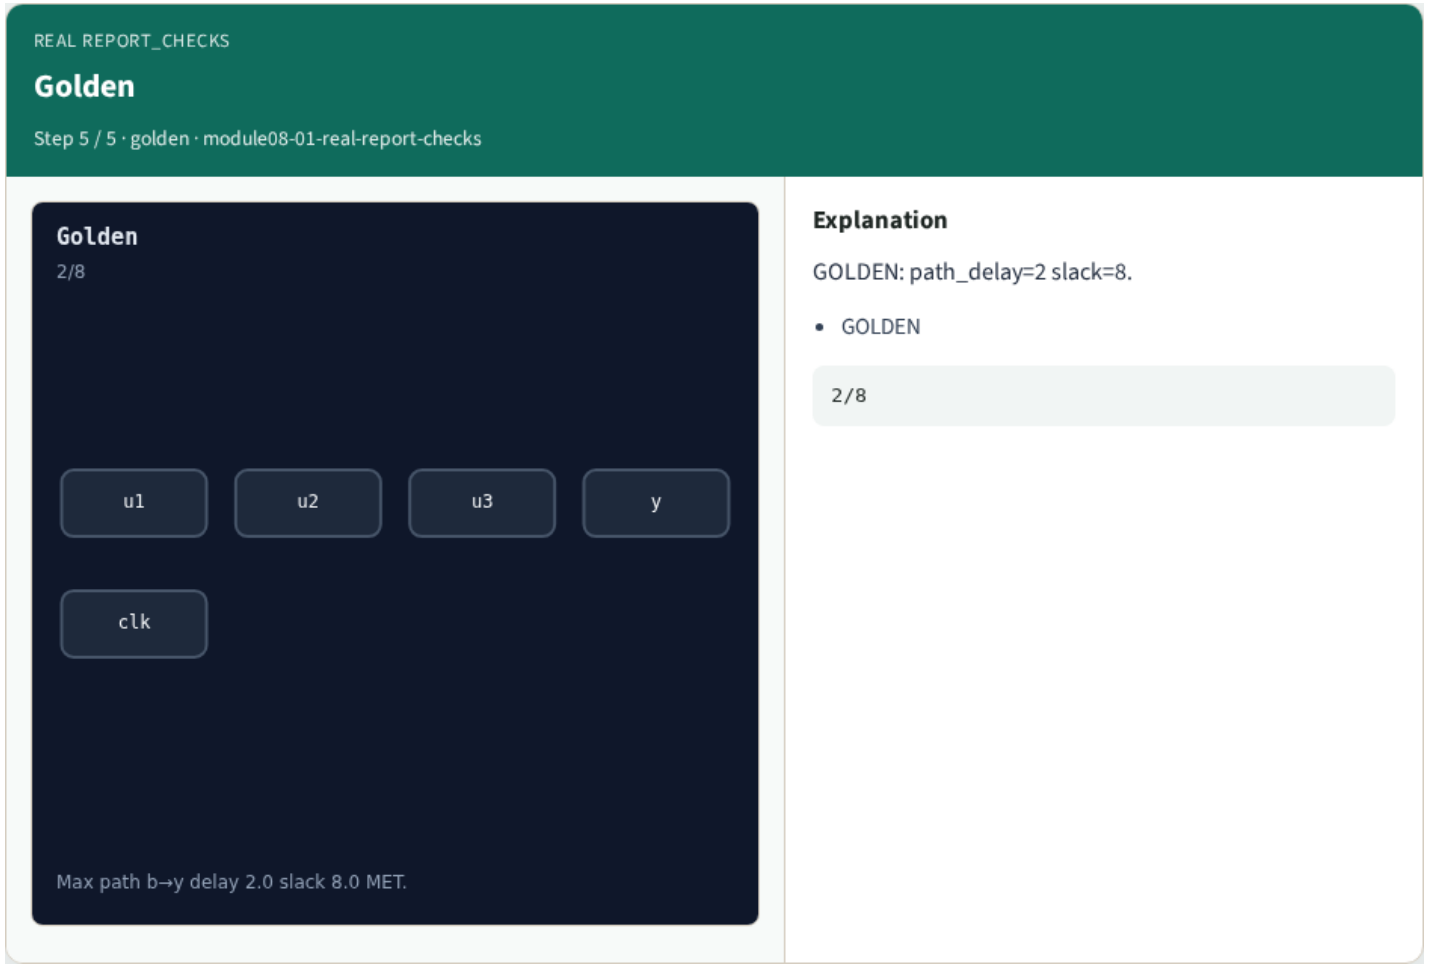

Golden

Browser lab track

- Open **real-report-checks**
- Build the Tcl recipe or open evidence stages, then Check

Implement track

- From common/, run real_solvers.py and confirm REAL_OPENSTA_OK

Pitfalls

- Editing goldens by hand without re-running sta
- Confusing Part A map JSON with real liberty delays

Try these

- From the common folder, run the real OpenSTA self-test

Try these — try these

```
cd courses/learn_opensta/common
python3 real_solvers.py
```

Pseudocode

- Here is the check in plain steps

Pseudocode — try these

```
endpoint y; delay 2.0; slack 8.0 MET.
ok if goldens match
```

Next

- Complete the quiz for this part
- Continue the Part B evidence track, then wrap , algorithms and internals come later