2-D compact

2-D compaction usually alternates axes (X then Y on the toy)

The idea


- GOLDEN: initial 20×6 → final width 14 (height may shift slightly with projections)

Order

2-D COMPACT

Order

Step 1 / 5 · order · module02-07-compact-2d

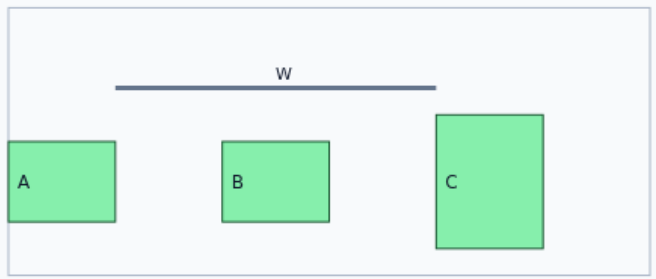

Explanation


Default order is X then Y.

- axes

```
x,y
```


Order

X step

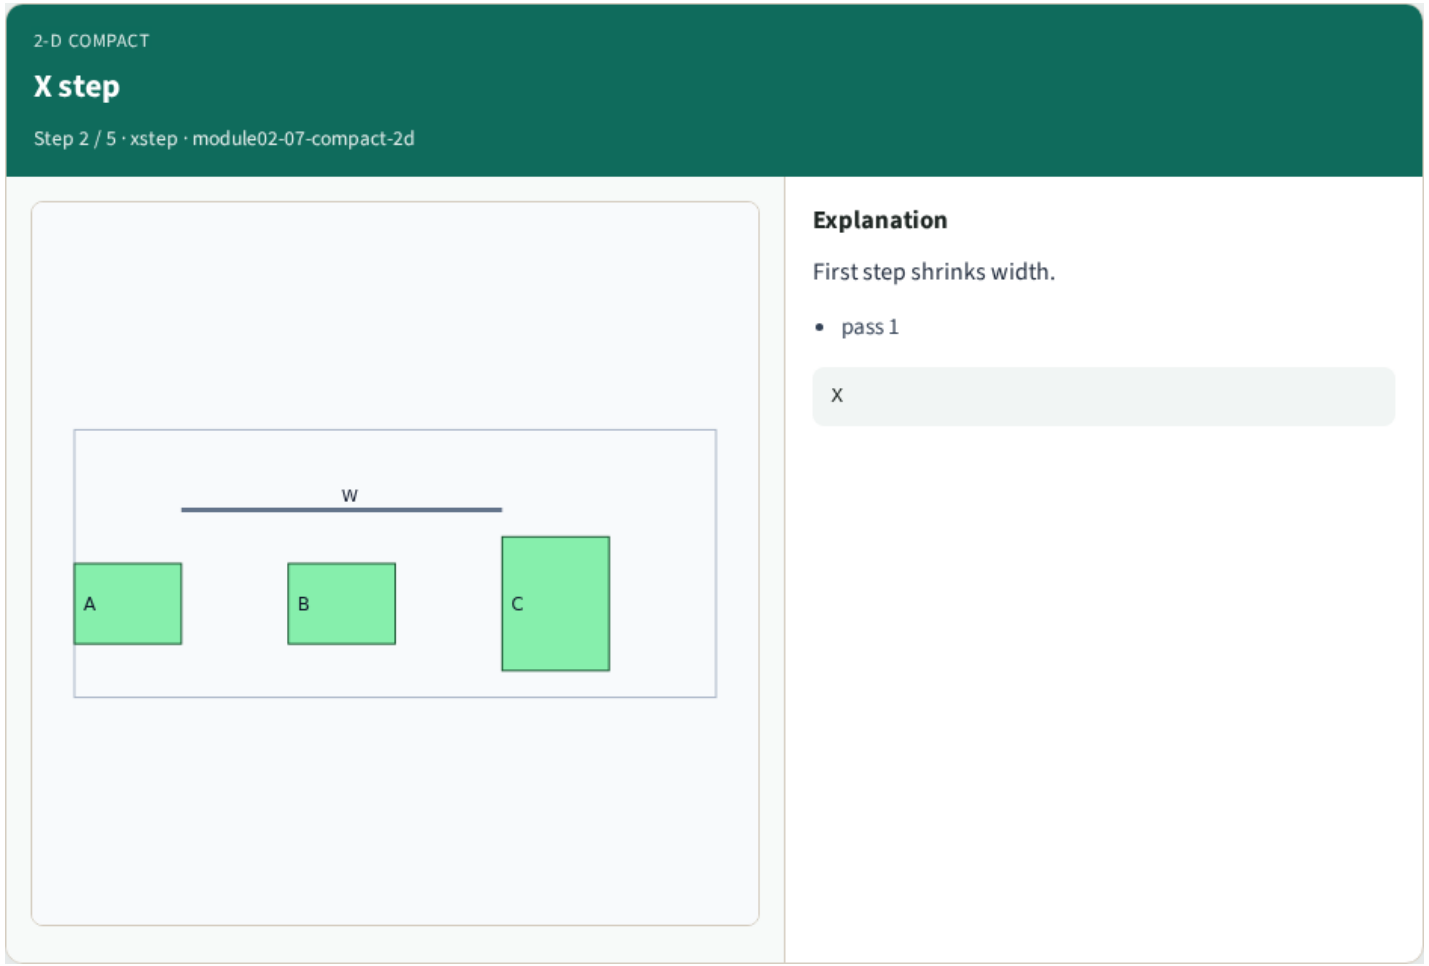
2-D COMPACT
X step
Step 2 / 5 · xstep · module02-07-compact-2d
W
A
B
C
Explanation
First step shrinks width.
pass 1
X

X step

Y step

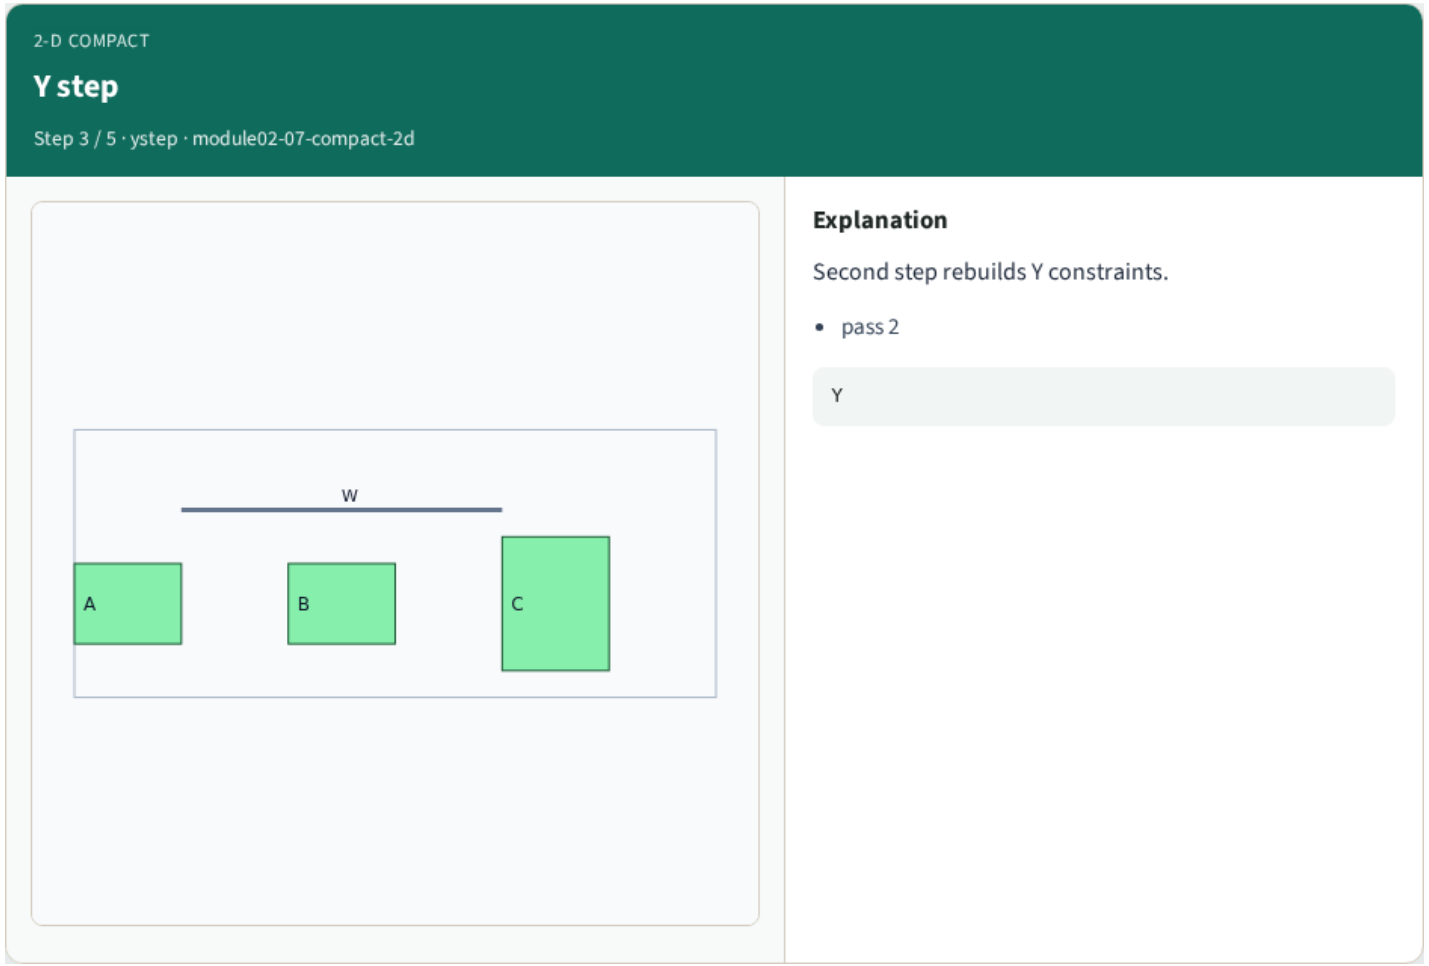
2-D COMPACT
Y step
Step 3 / 5 · ystep · module02-07-compact-2d
W
A
B
C
Explanation
Second step rebuilds Y constraints.
pass 2
Y


Y step

Final

2-D COMPACT

Final

Step 4 / 5 · final · module02-07-compact-2d

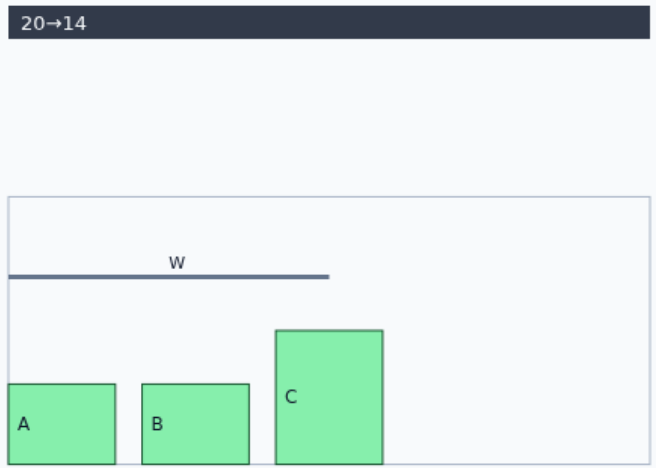

Explanation

final_width=14 on the toy.

- GOLDEN

```
14
```


Final

Trade

2-D COMPACT

Trade

Step 5 / 5 · trade · module02-07-compact-2d

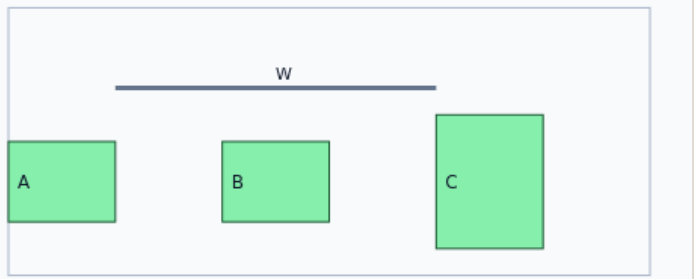

Explanation


Axis order can change results in richer layouts.

- order

```
literacy
```

Trade

Browser lab track

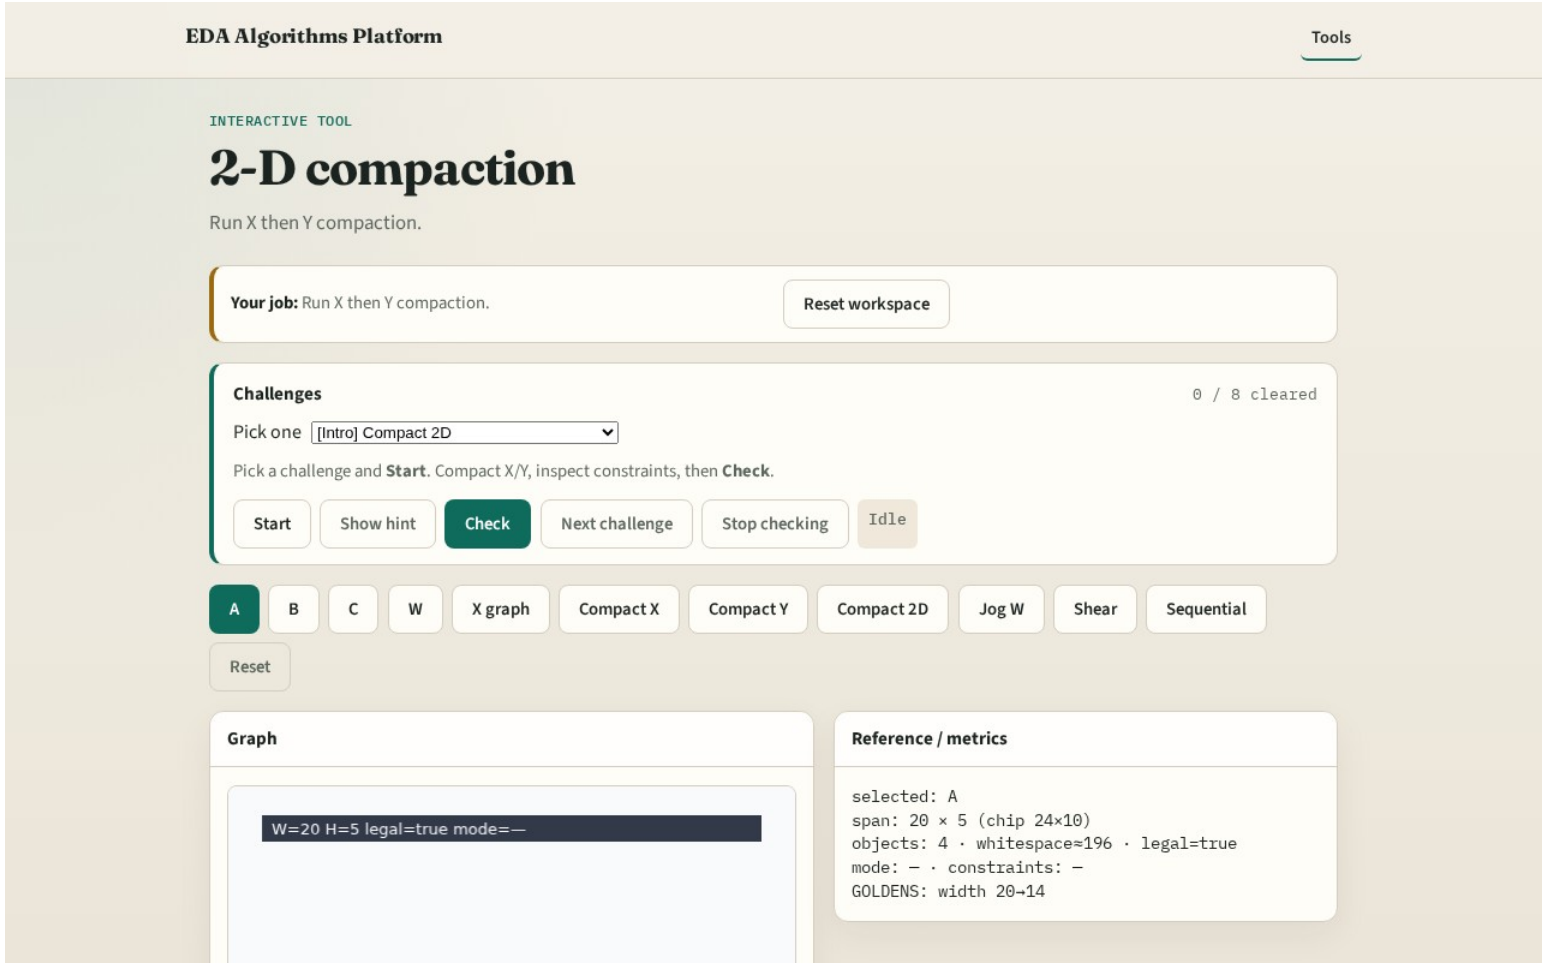

Browser lab starter

Implement track

- Call compact_2d(DATA); assert final_width==14

Pitfalls

- Assuming one axis is enough
- Ignoring order sensitivity

Your turn

- Next: wire jogs