
Markers

Signoff antenna emits one marker per violating net (after diode)

The idea


- GOLDEN: marker_count=1 on tiny_antenna

Violations

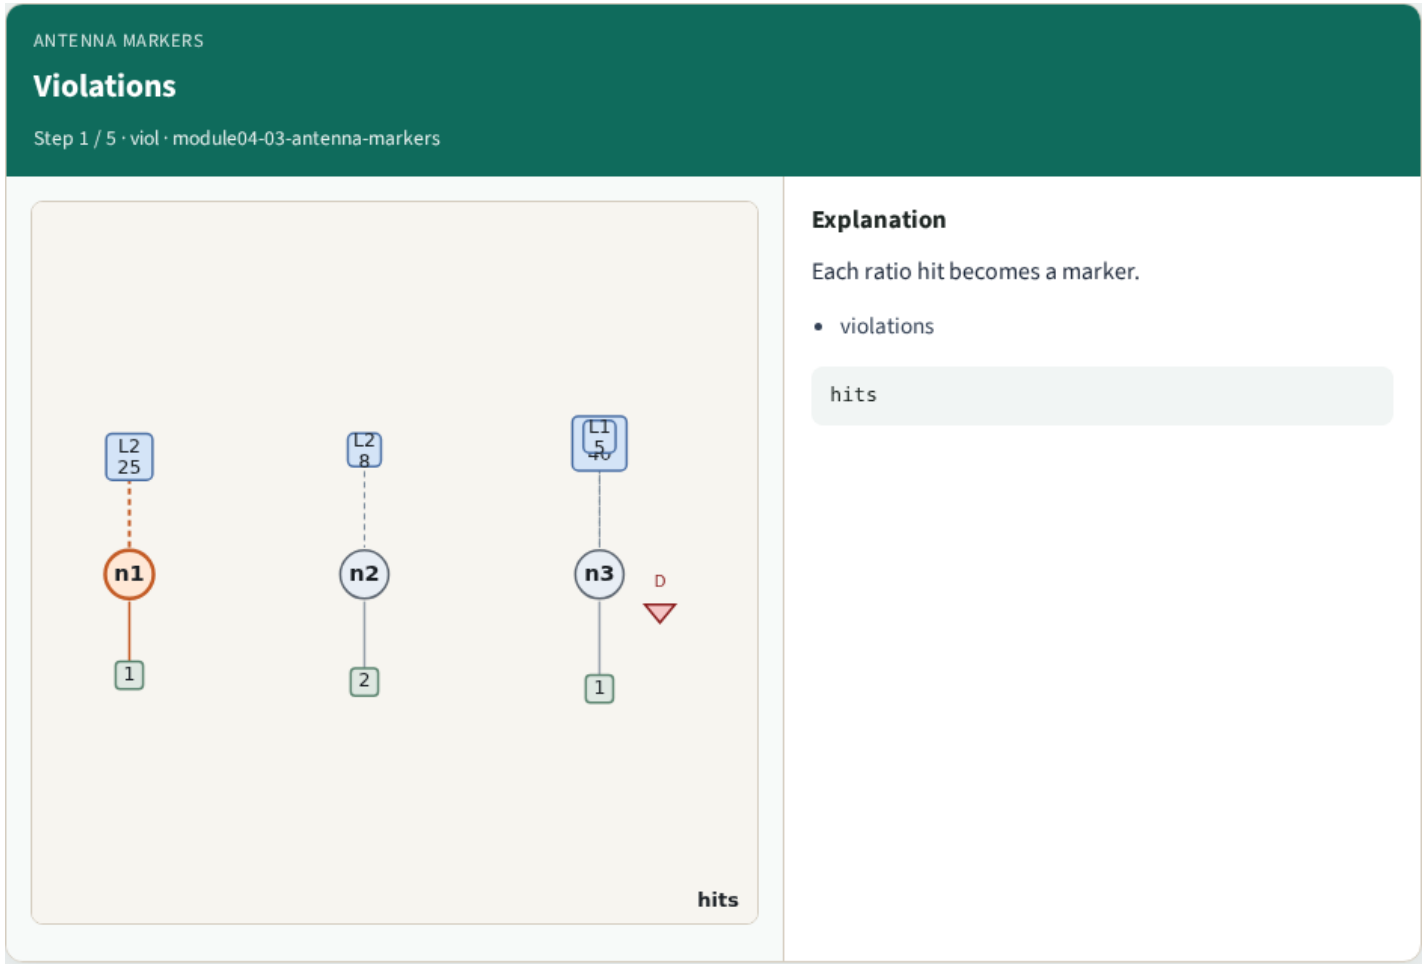


Violations

n1 marker

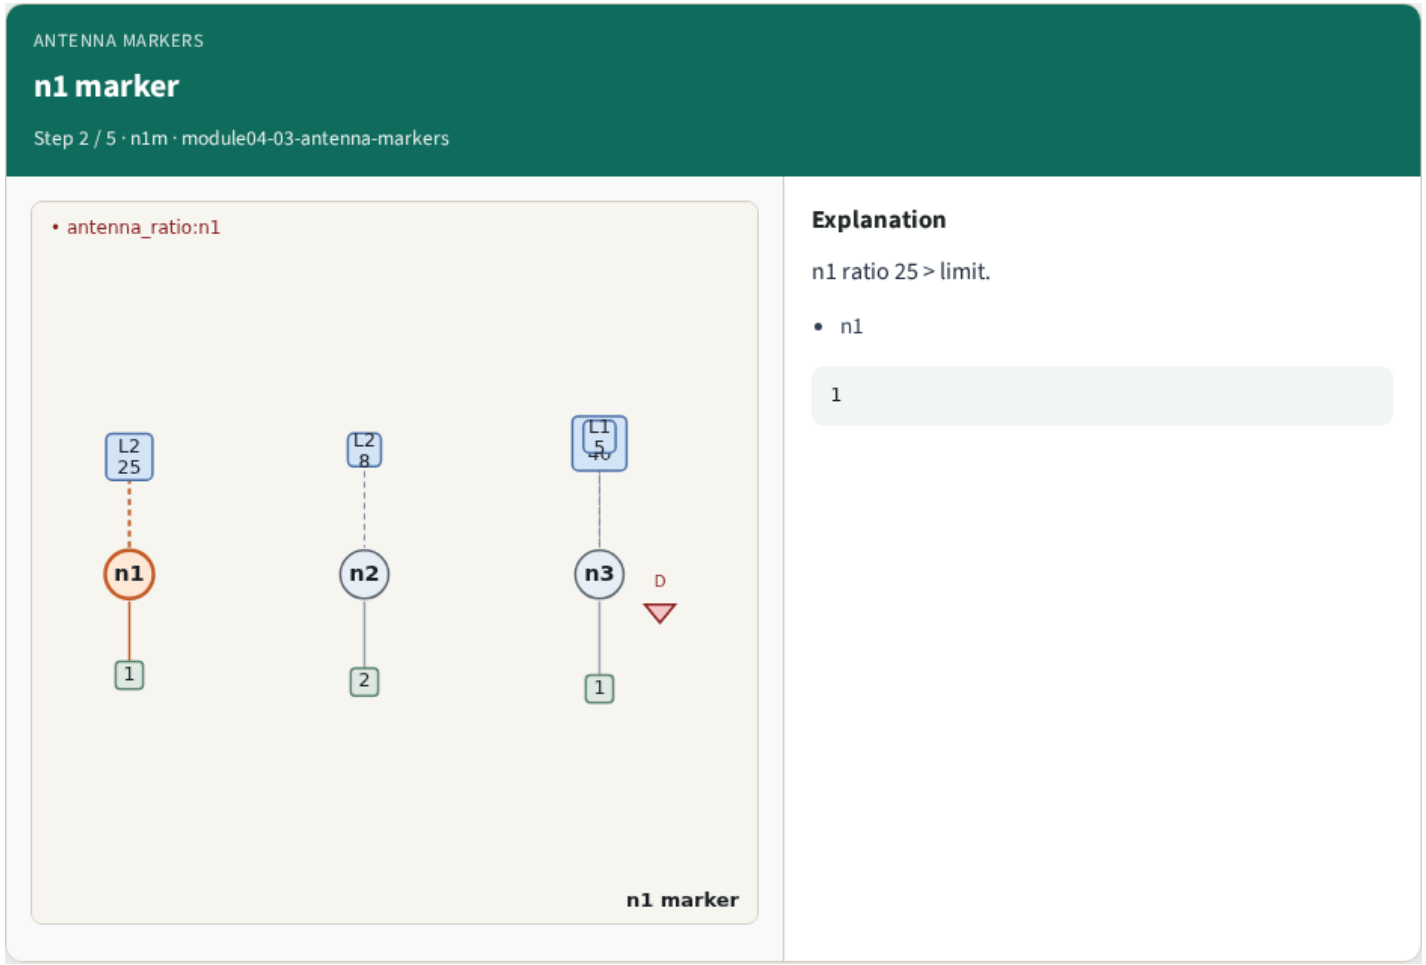

n1 marker

n3 skipped

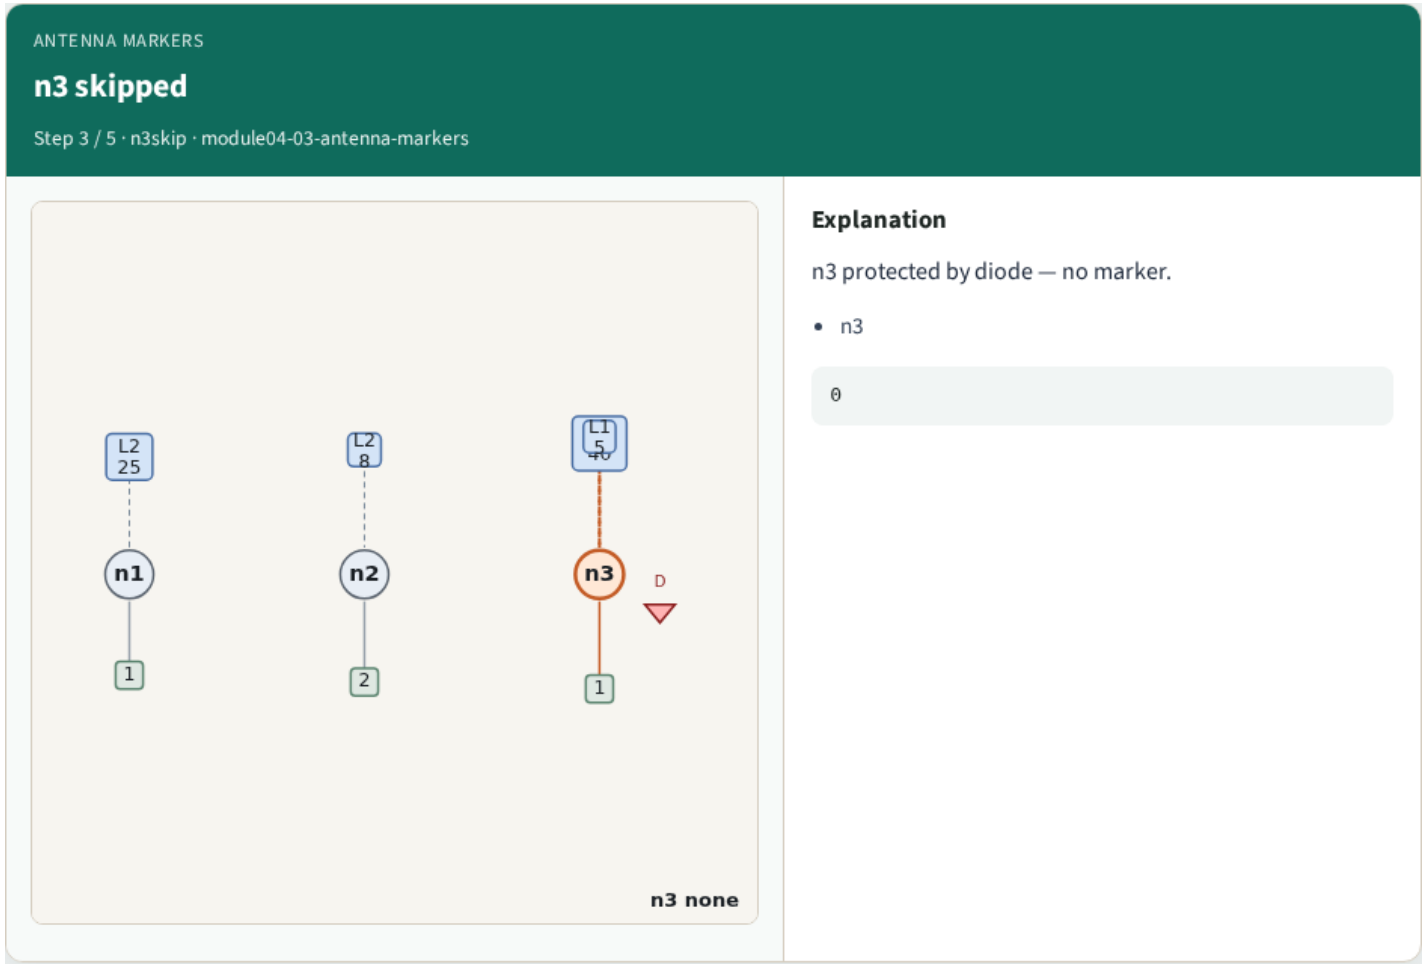


n3 skipped

Kind

ANTENNA MARKERS

Kind

Step 4 / 5 · kind · module04-03-antenna-markers

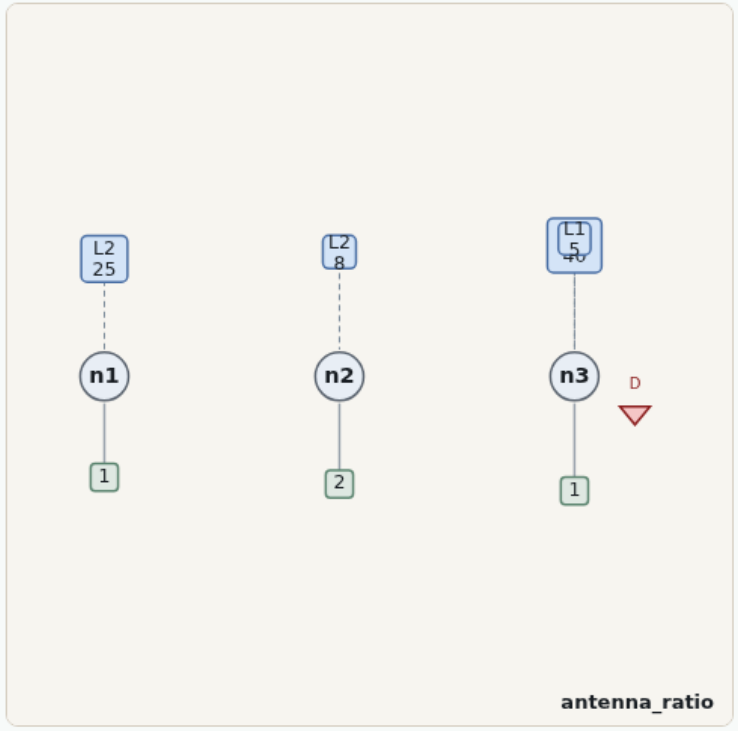

Explanation


kind=antenna_ratio on each hit.

- kind

```
antenna_ratio
```


Kind

Golden

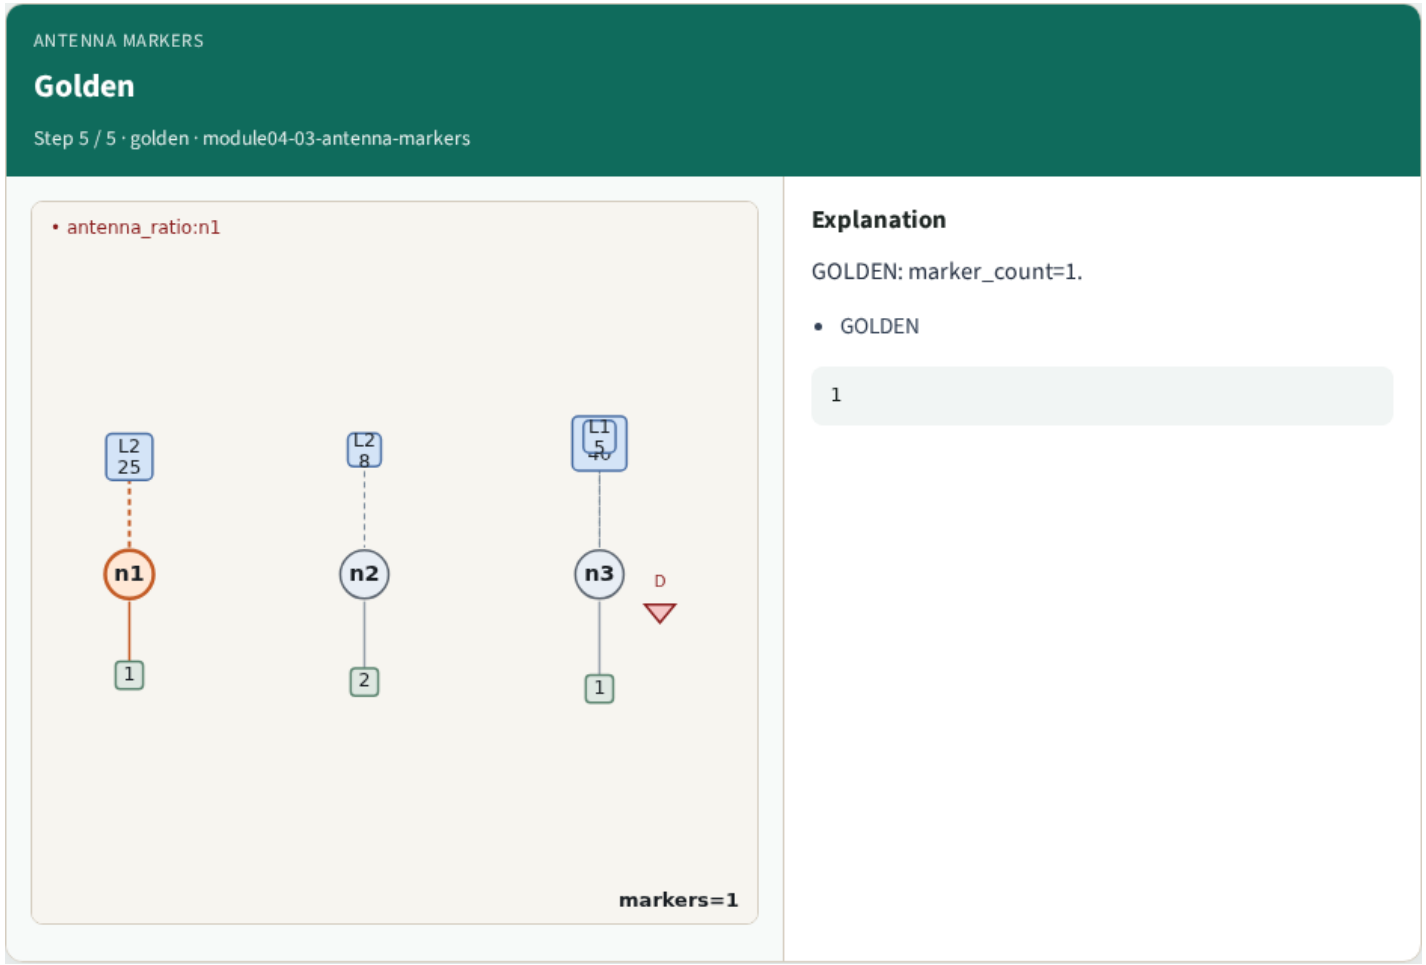

Golden

Browser lab track

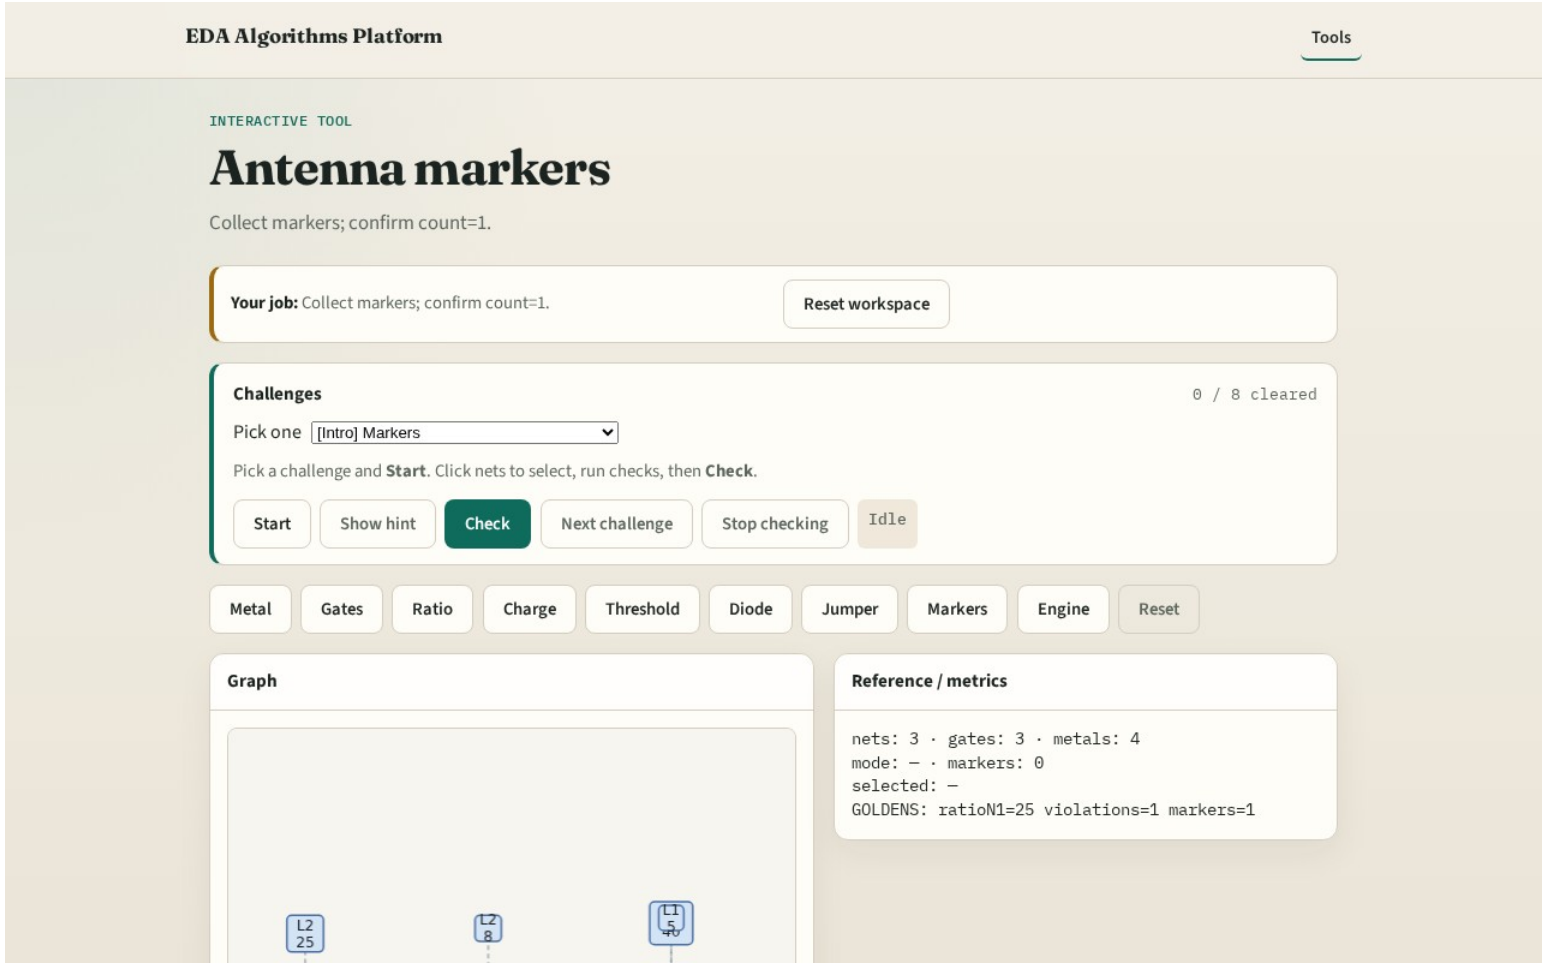

Browser lab starter

Implement track

- Call collect_markers(); assert count==1

Pitfalls

- Counting raw violations
- Missing diode waiver

Your turn

- Next: antenna engine