
Why floating

A floating net has loads but no driver , classic ERC fail

The idea


- GOLDEN: floating_nets=['float_n'], count=1

No driver

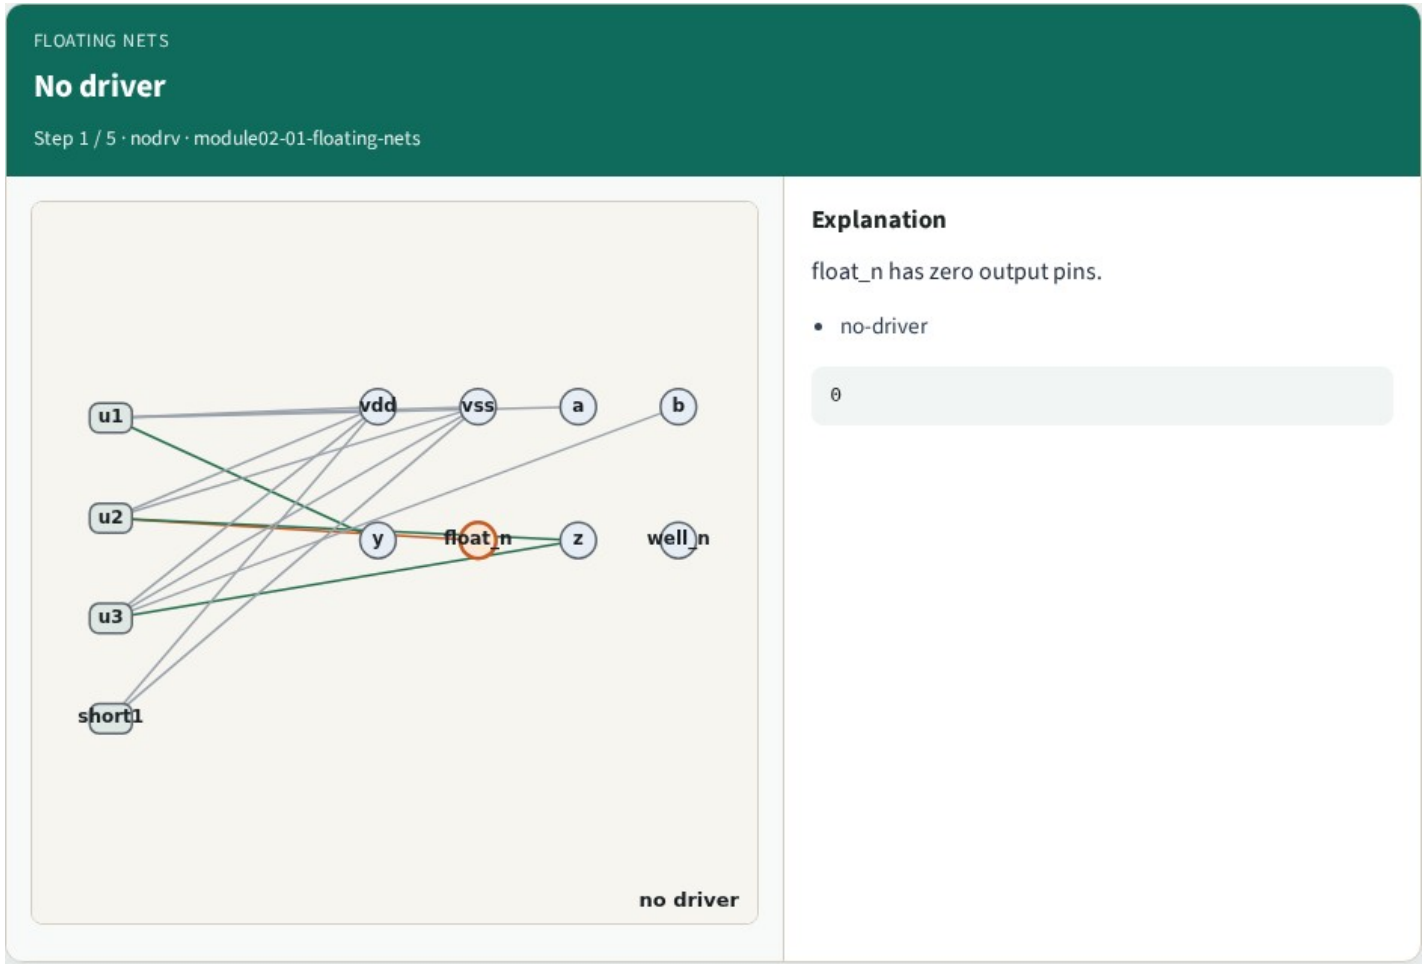


No driver

Has load

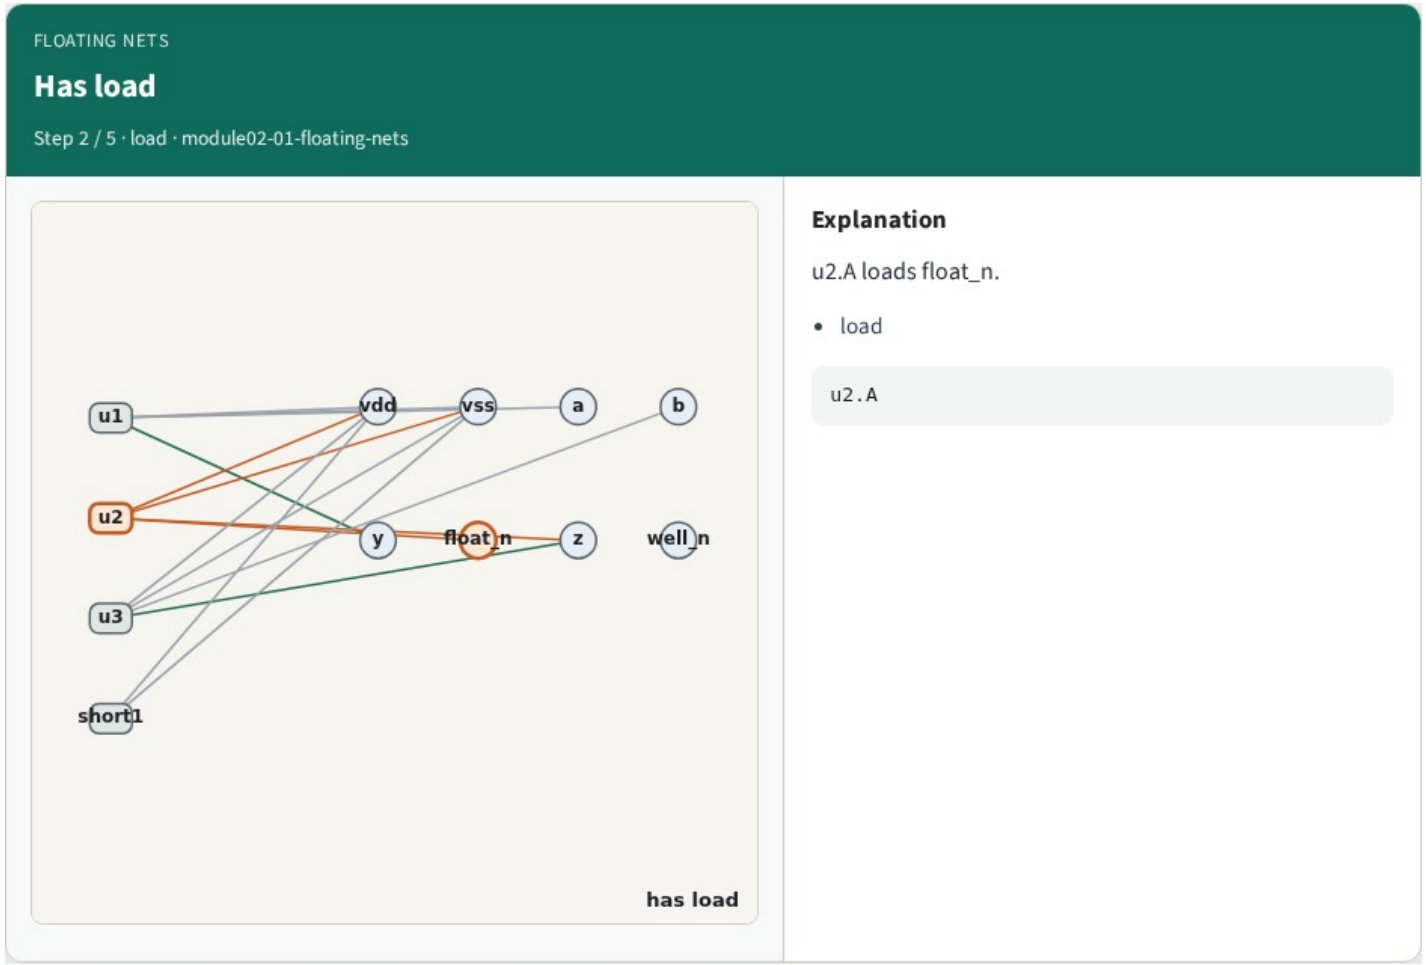


Has load

Not port

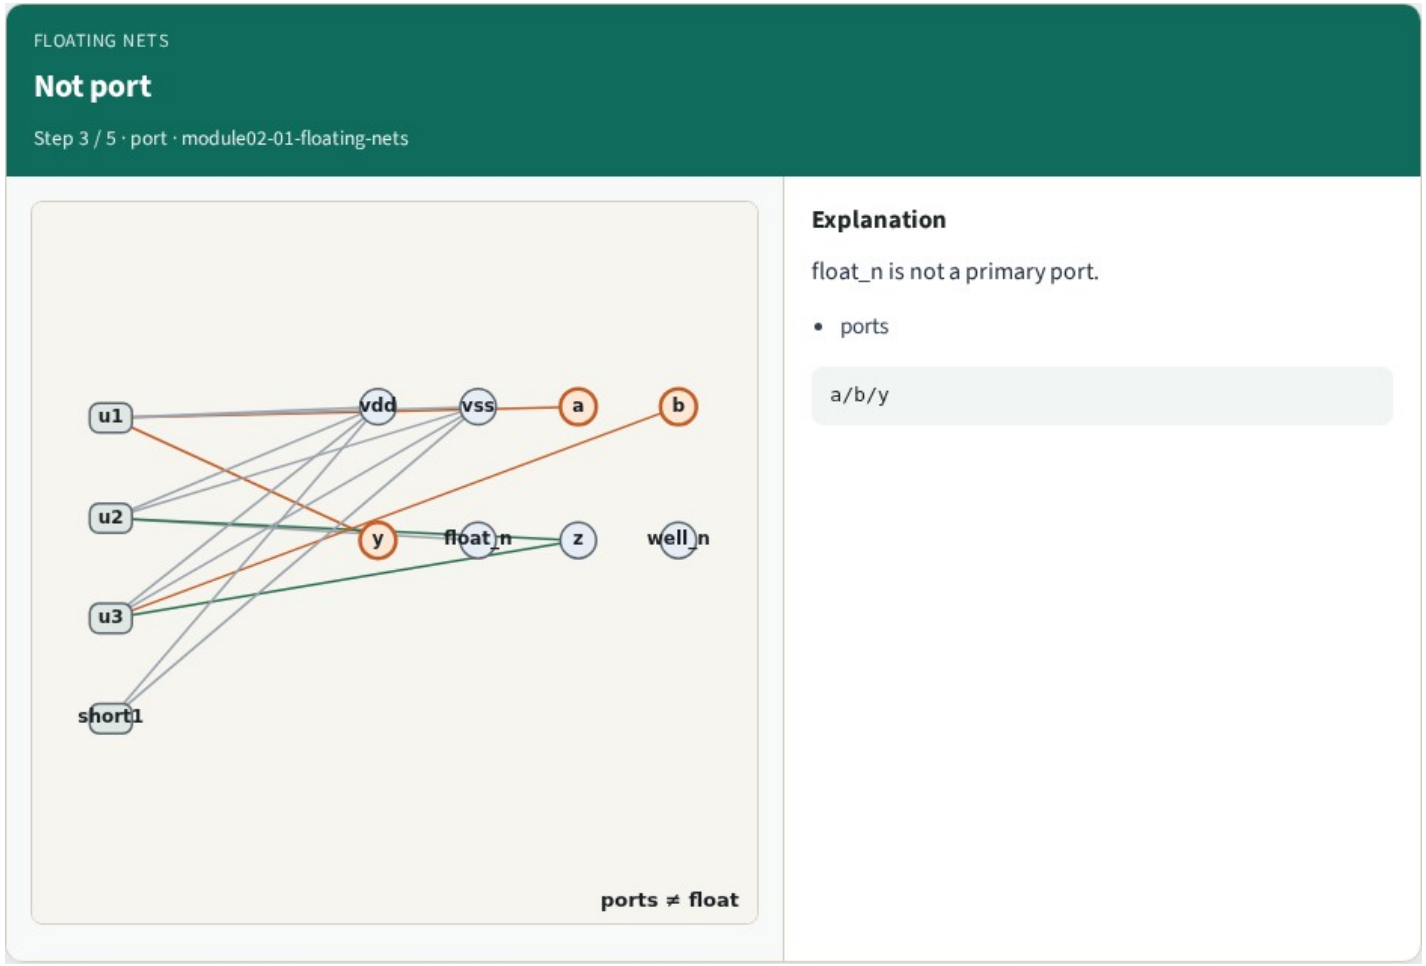


Not port

Not supply

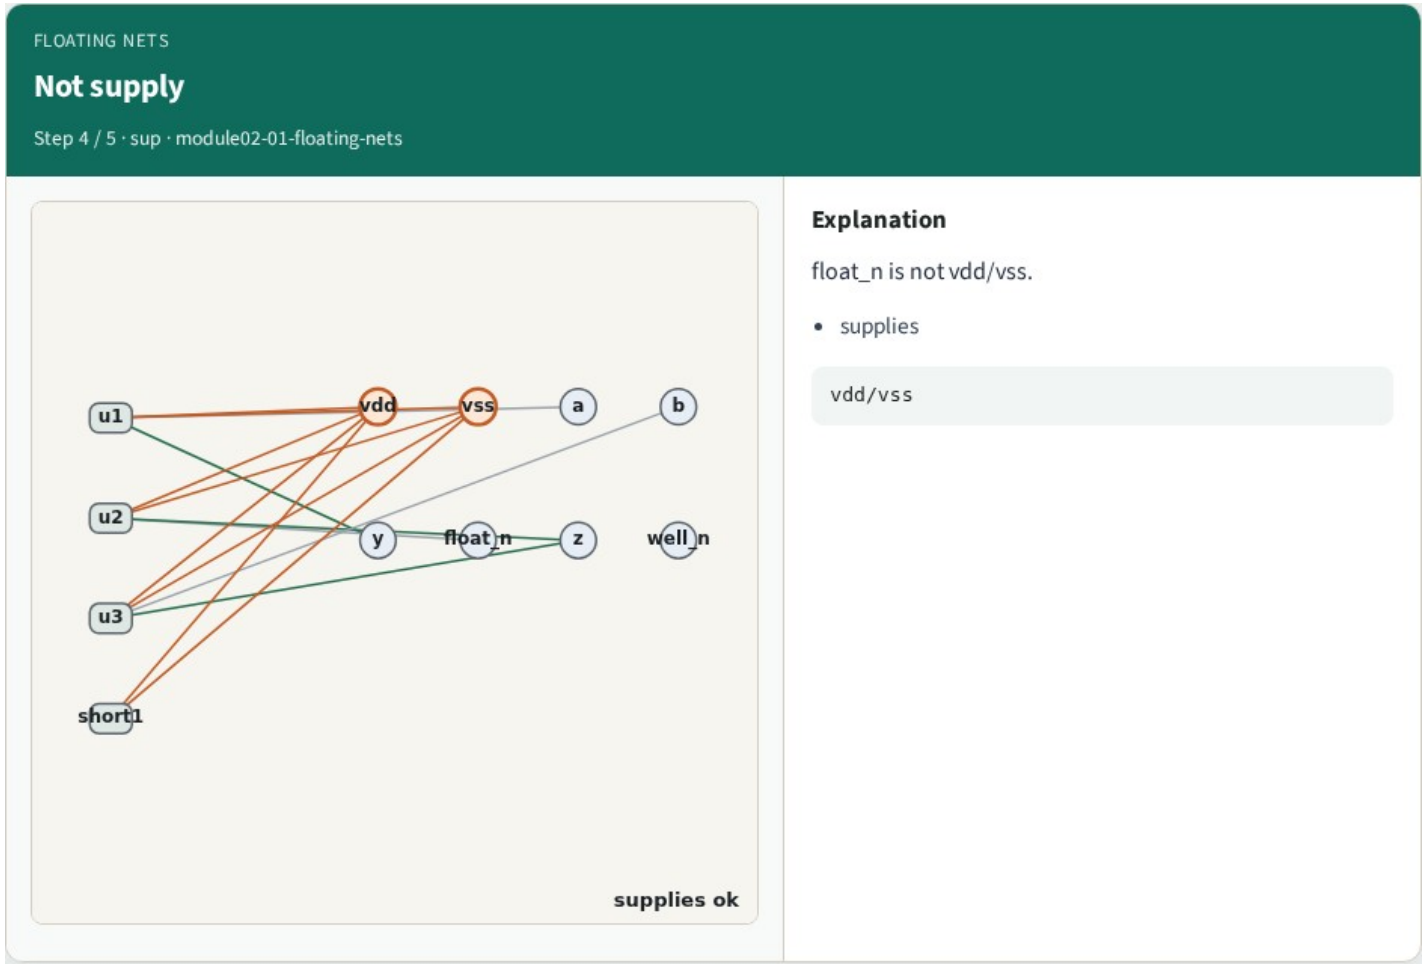


Not supply

Golden

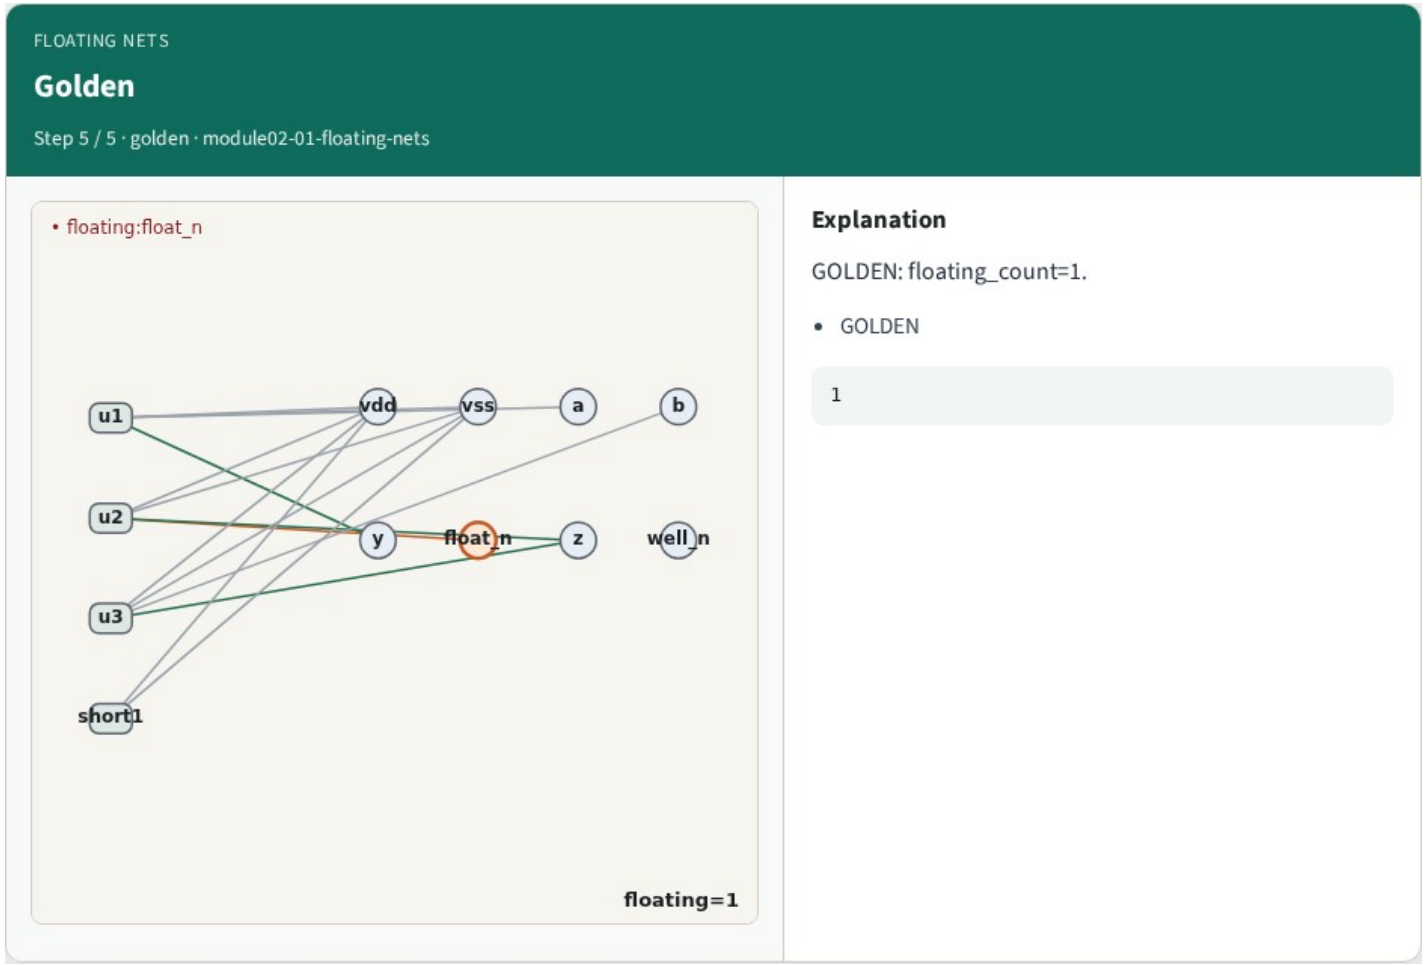

Golden

Browser lab track

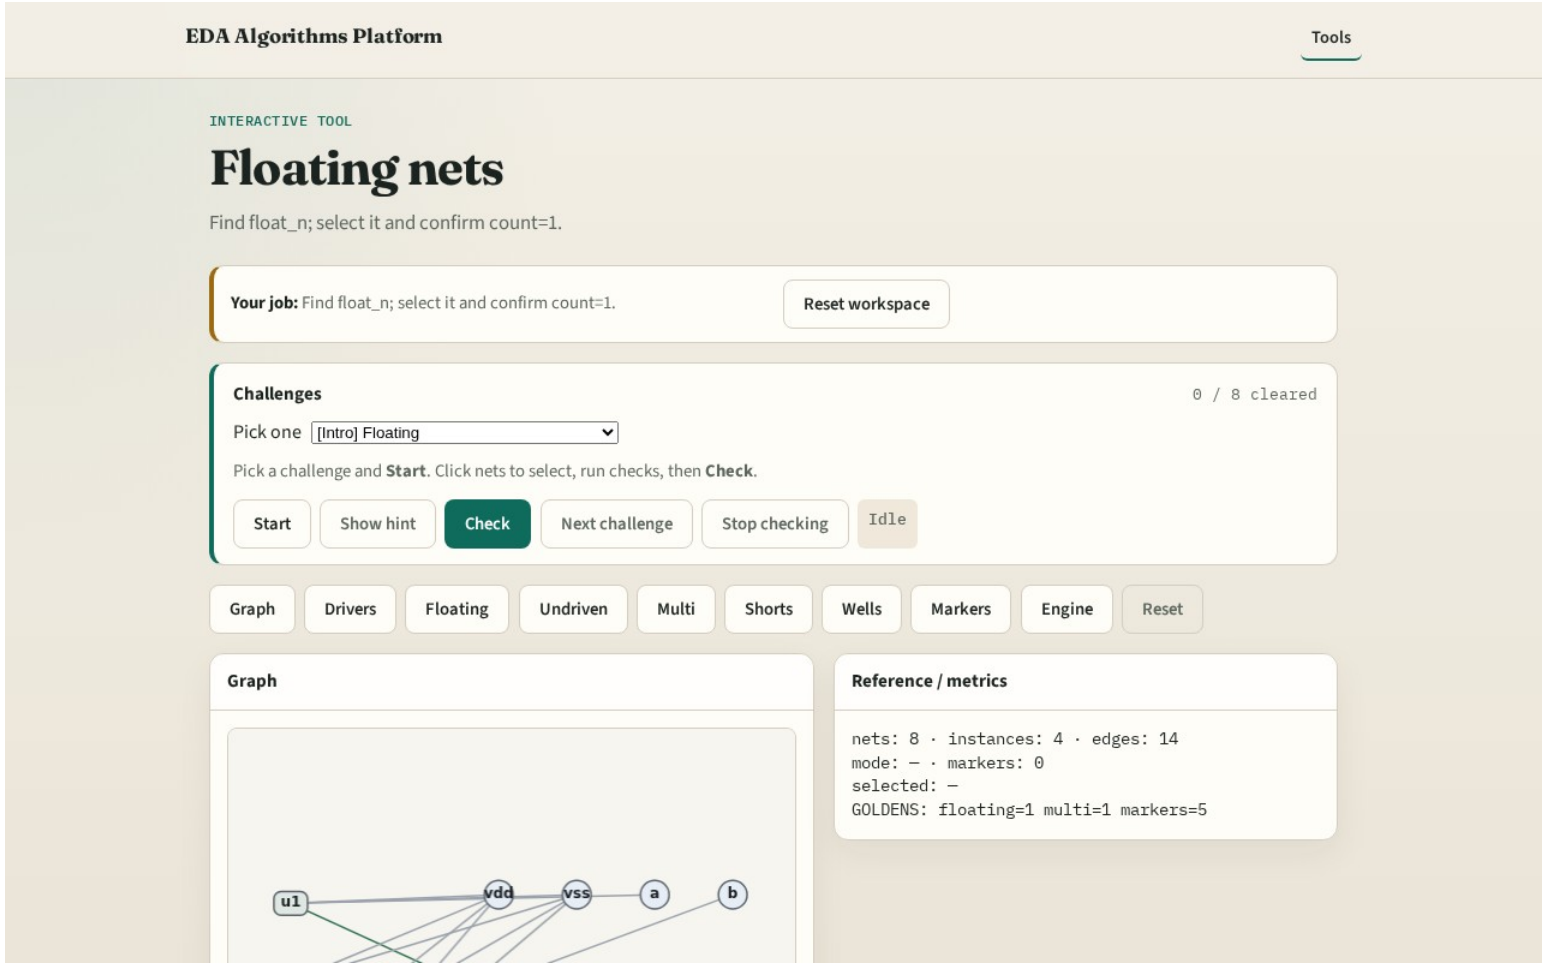

Browser lab starter

Implement track

- Call find_floating_nets(); assert nets==['float_n']

Pitfalls

- Flagging primary inputs as floating
- Ignoring unused well nets

Your turn

- Next: undriven inputs