
Why markers

Signoff ERC emits markers , one record per violation class hit

The idea


- GOLDEN: marker_count=5 on tiny_erc

Floating m

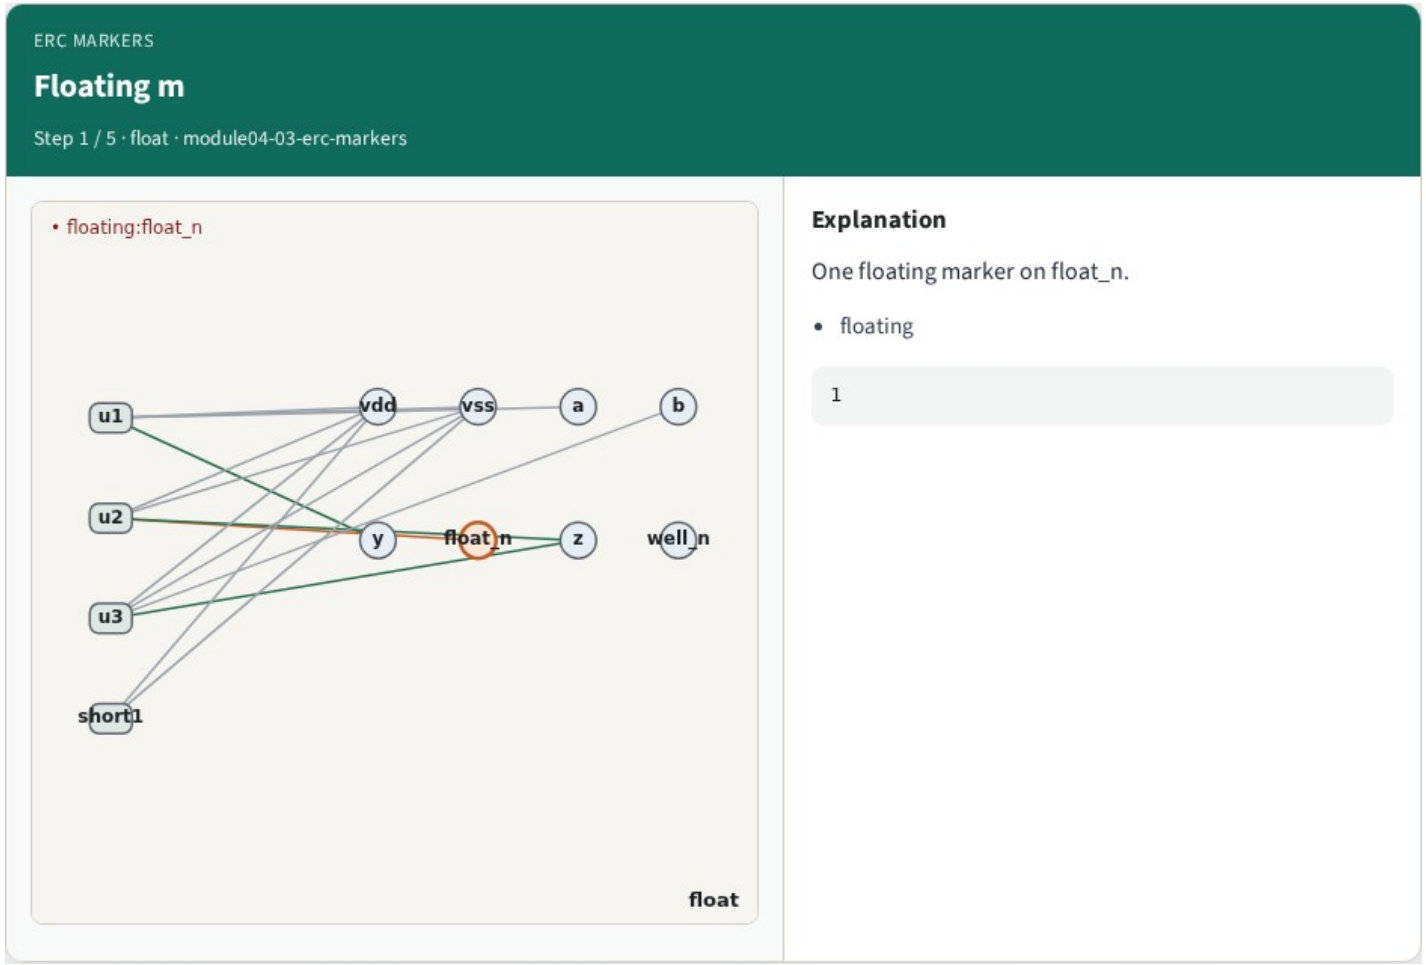


Floating m

Undriven m

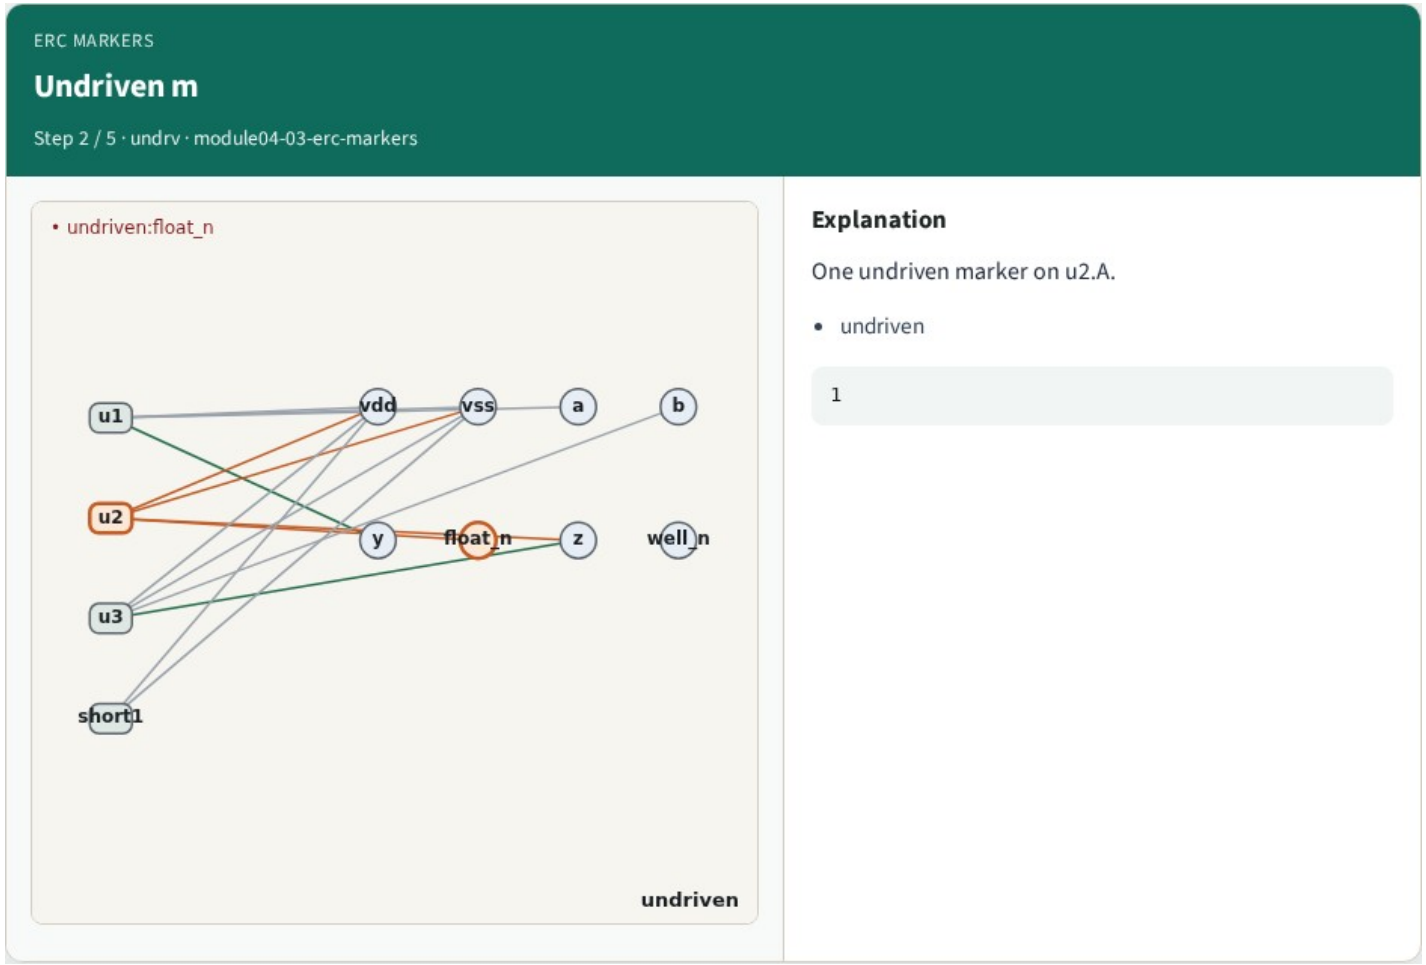


Undriven m

Multi m

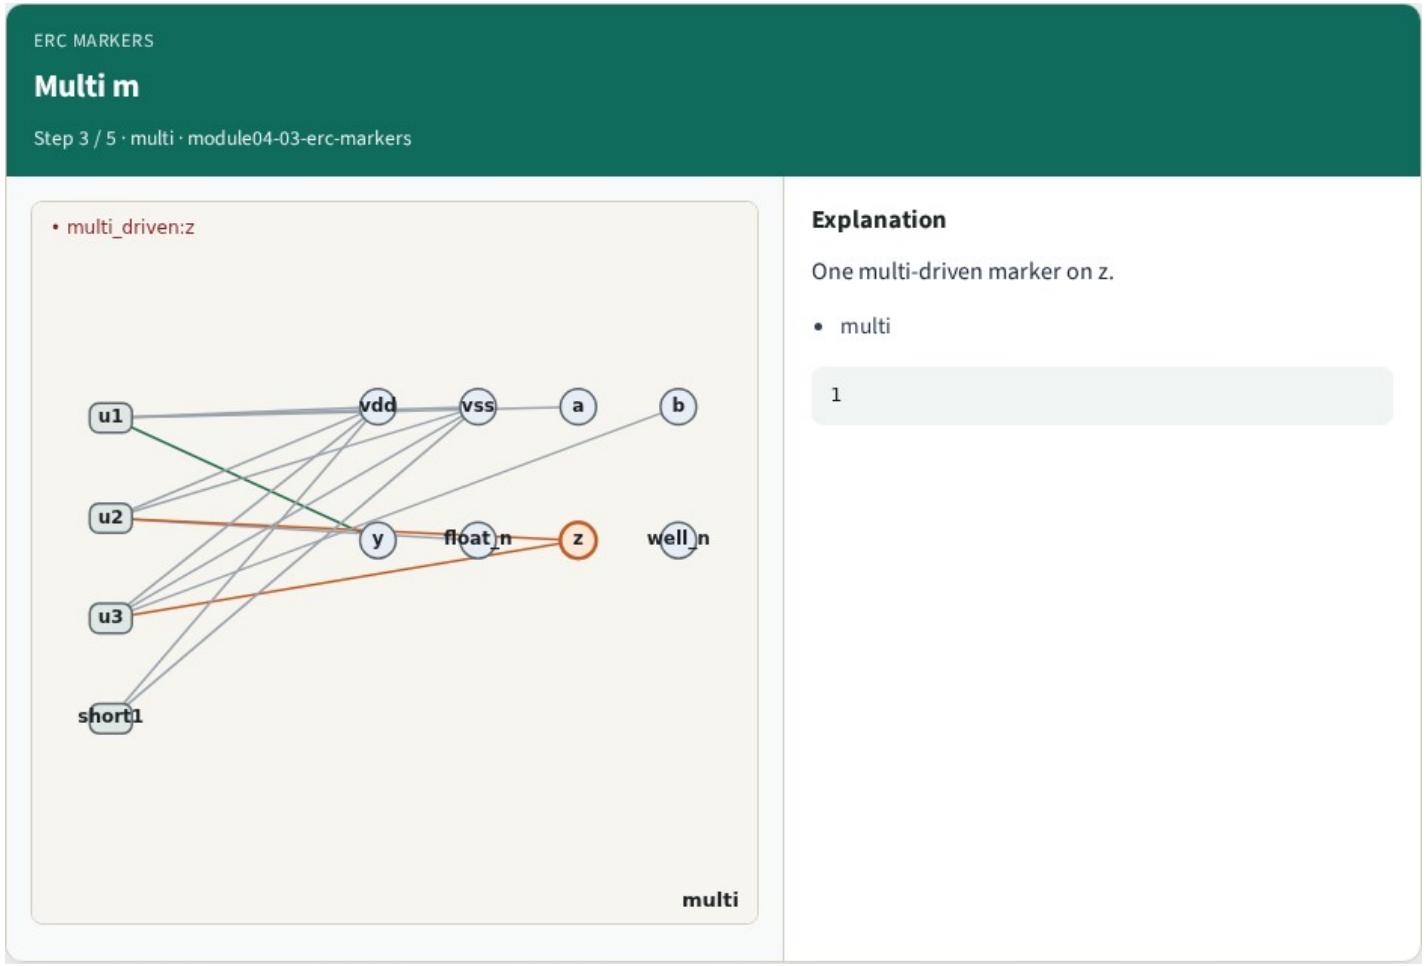


Multi m

Short+well

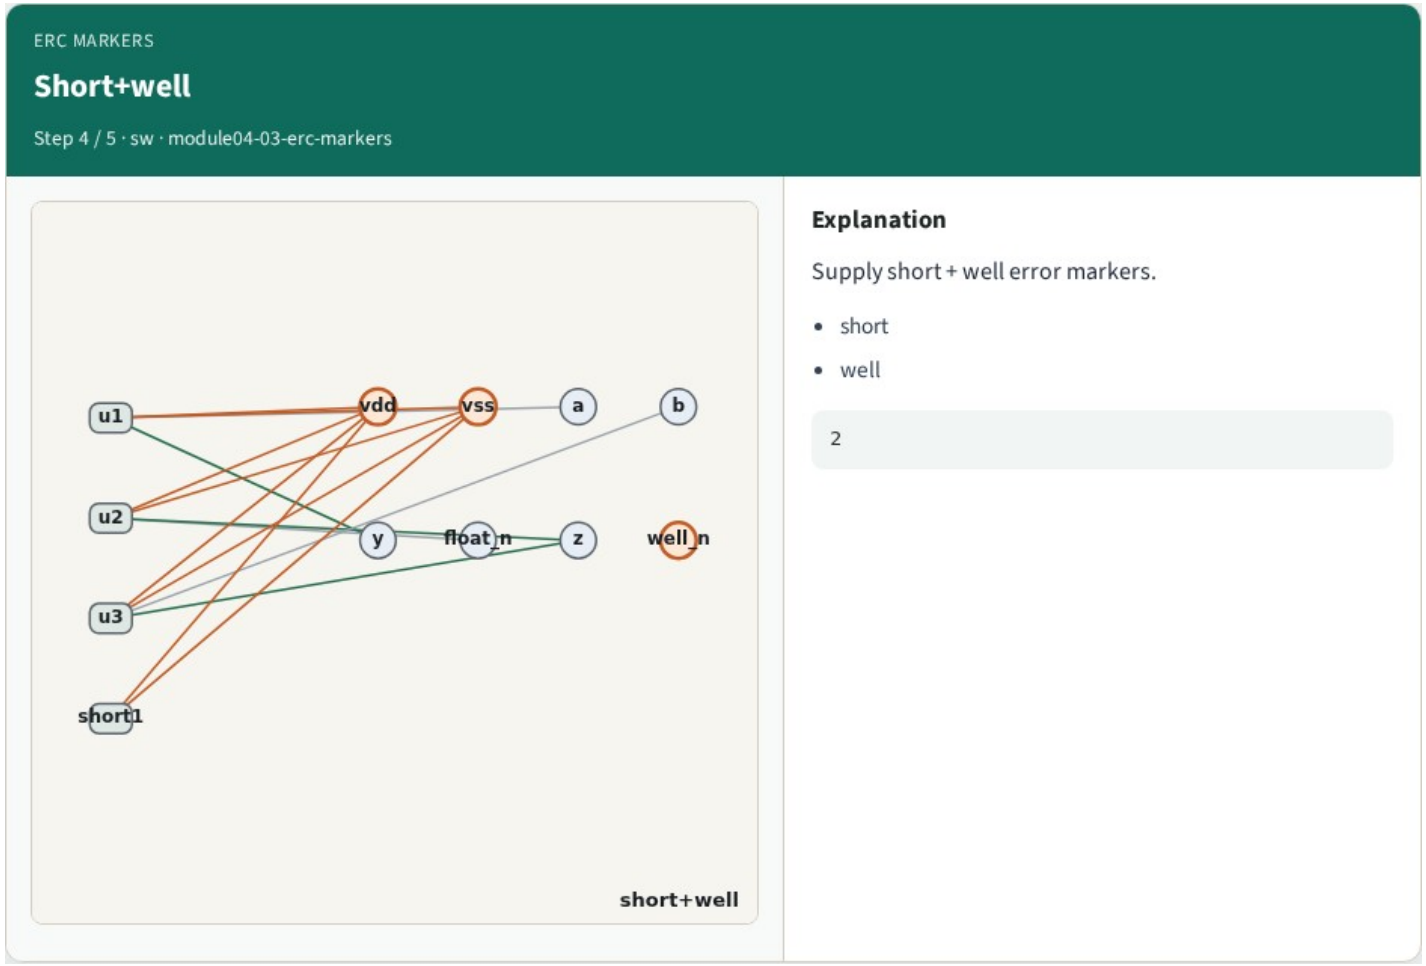


Short+well

Count 5

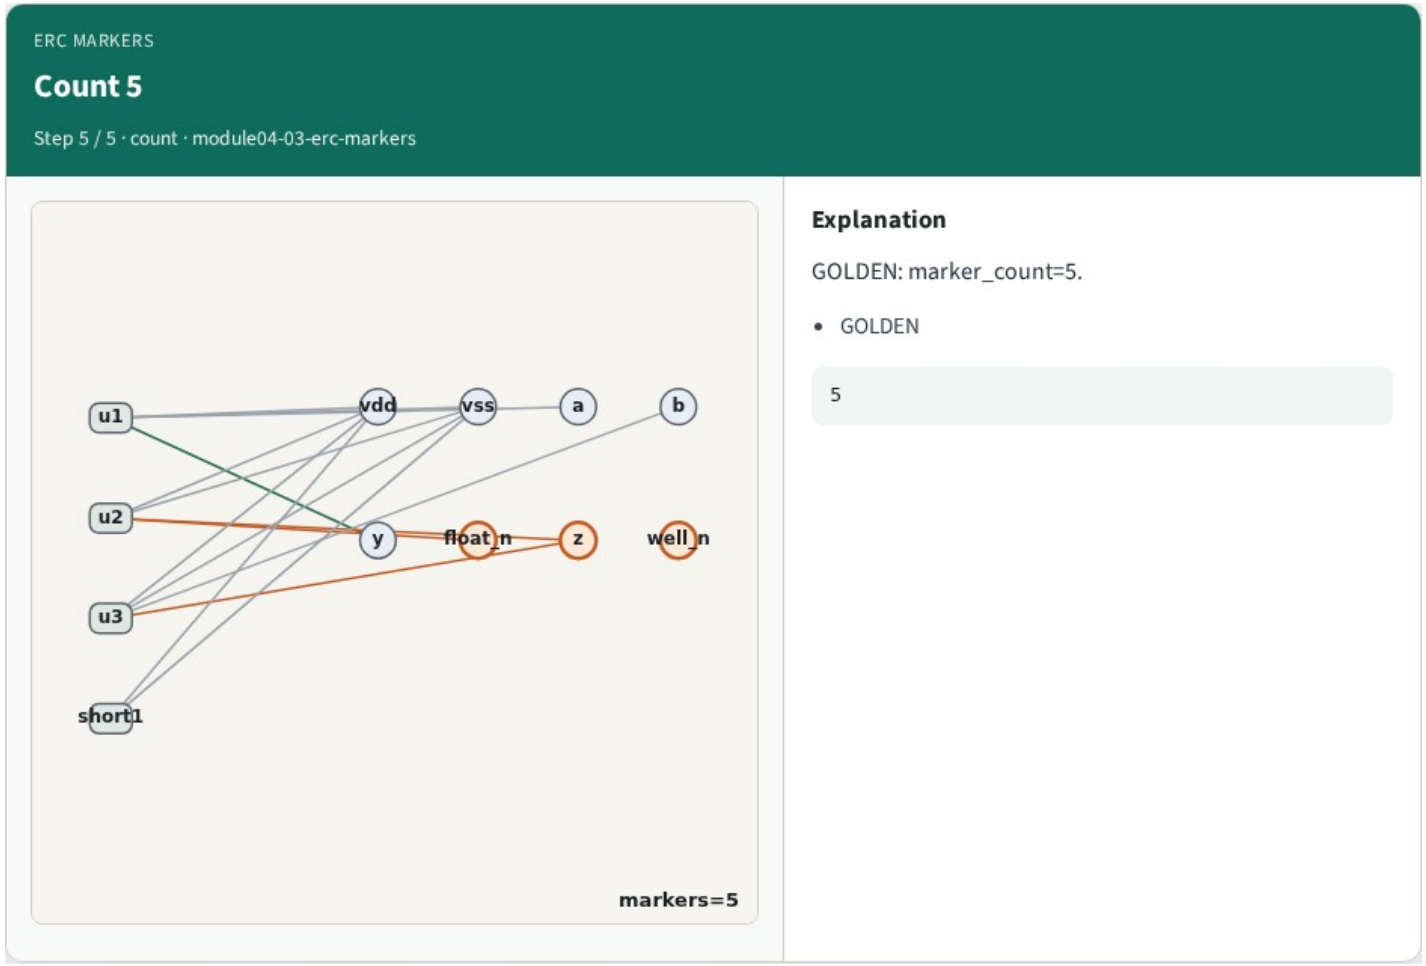

Count 5

Browser lab track

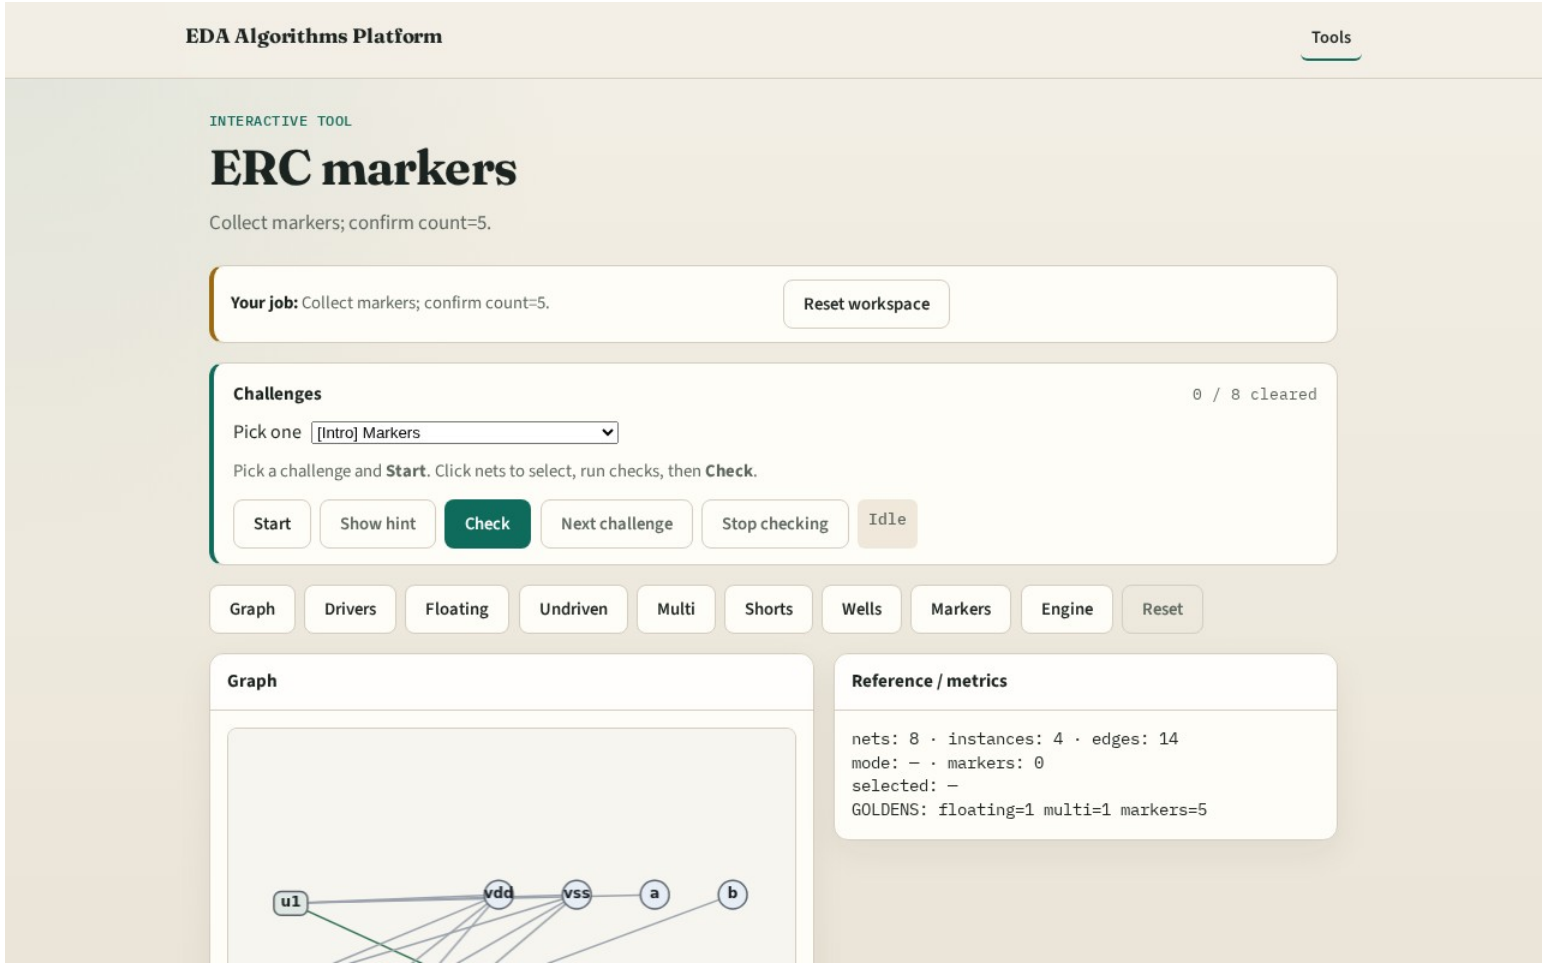

Browser lab starter

Implement track

- Call collect_markers(); assert count==5

Pitfalls

- Double-counting float as two markers incorrectly in the golden
- Missing well

Your turn

- Next: erc_engine integration