
Why techmap

Techmap rewrites generic cells into library primitives via map rules

The idea


- GOLDEN: nand_not_count=2 (NAND + NOT)

Map rule

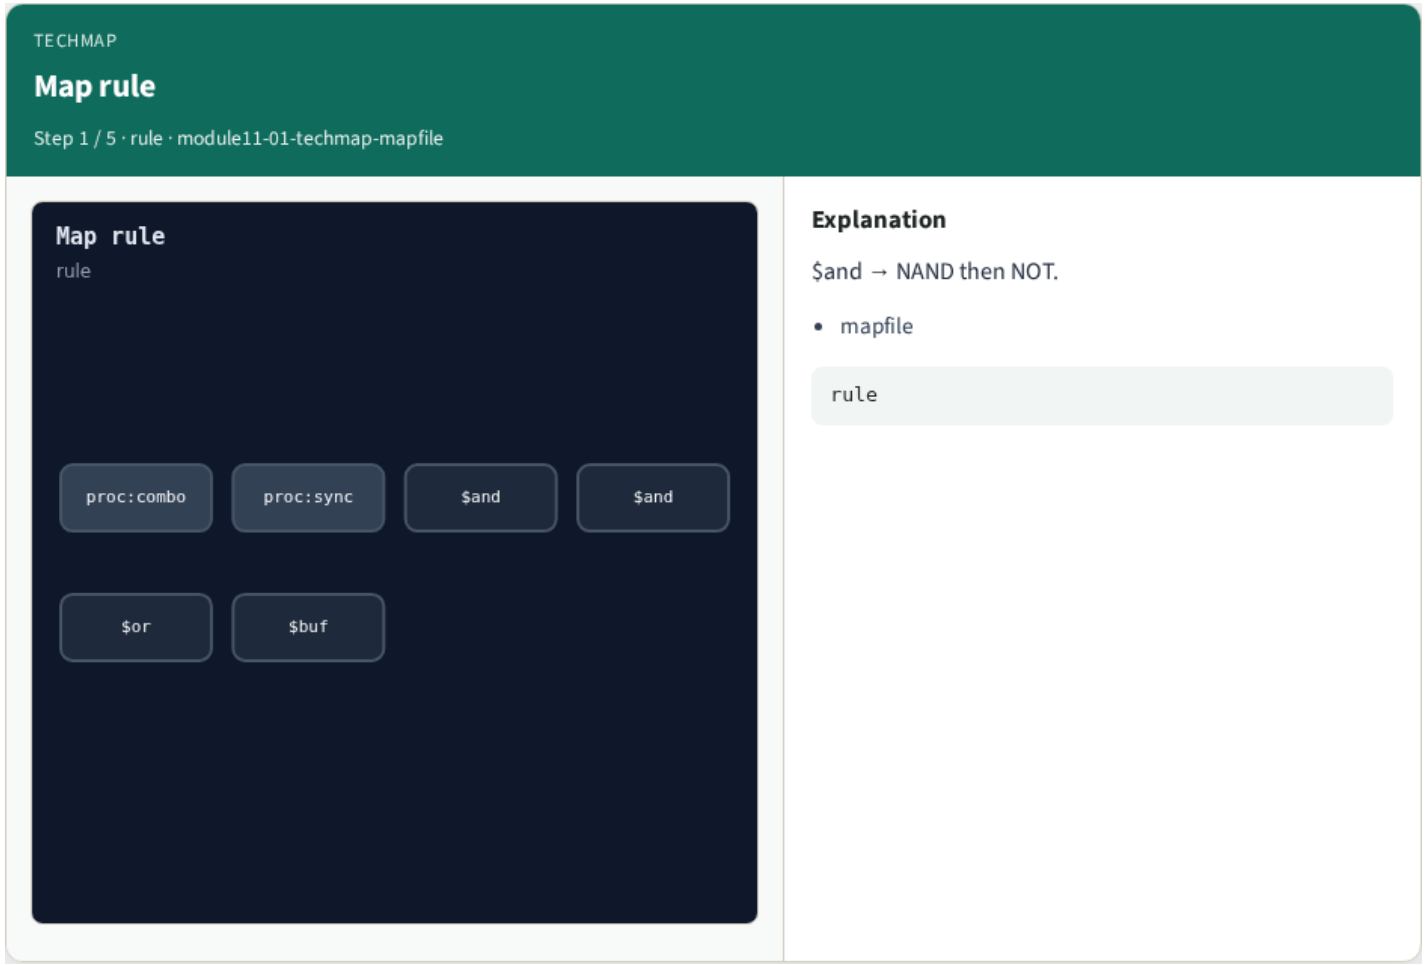


Map rule

Emit NAND

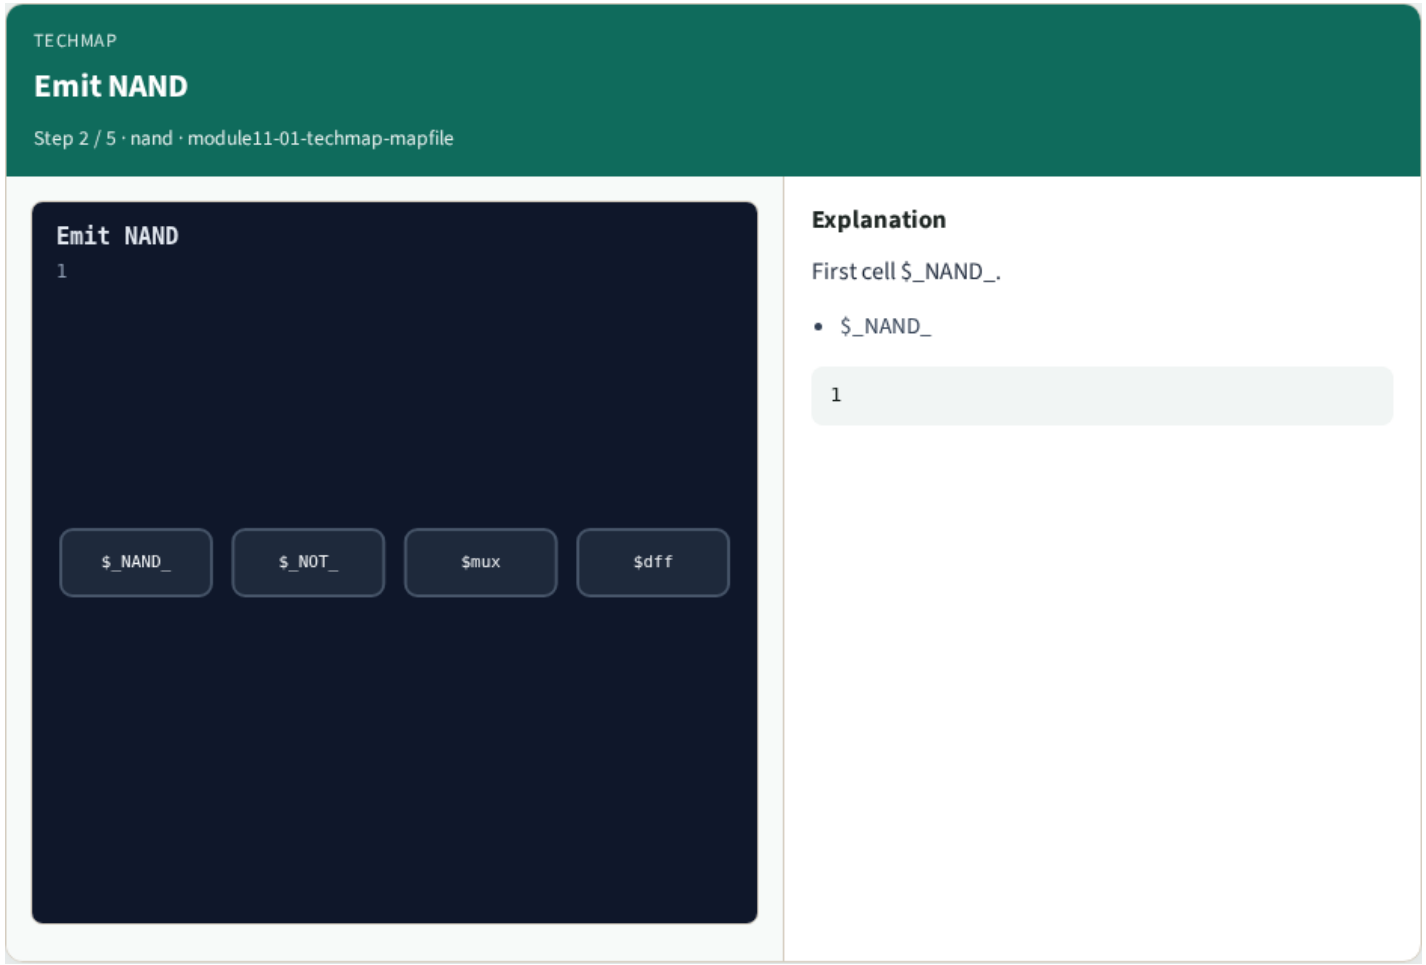


Emit NAND

Emit NOT

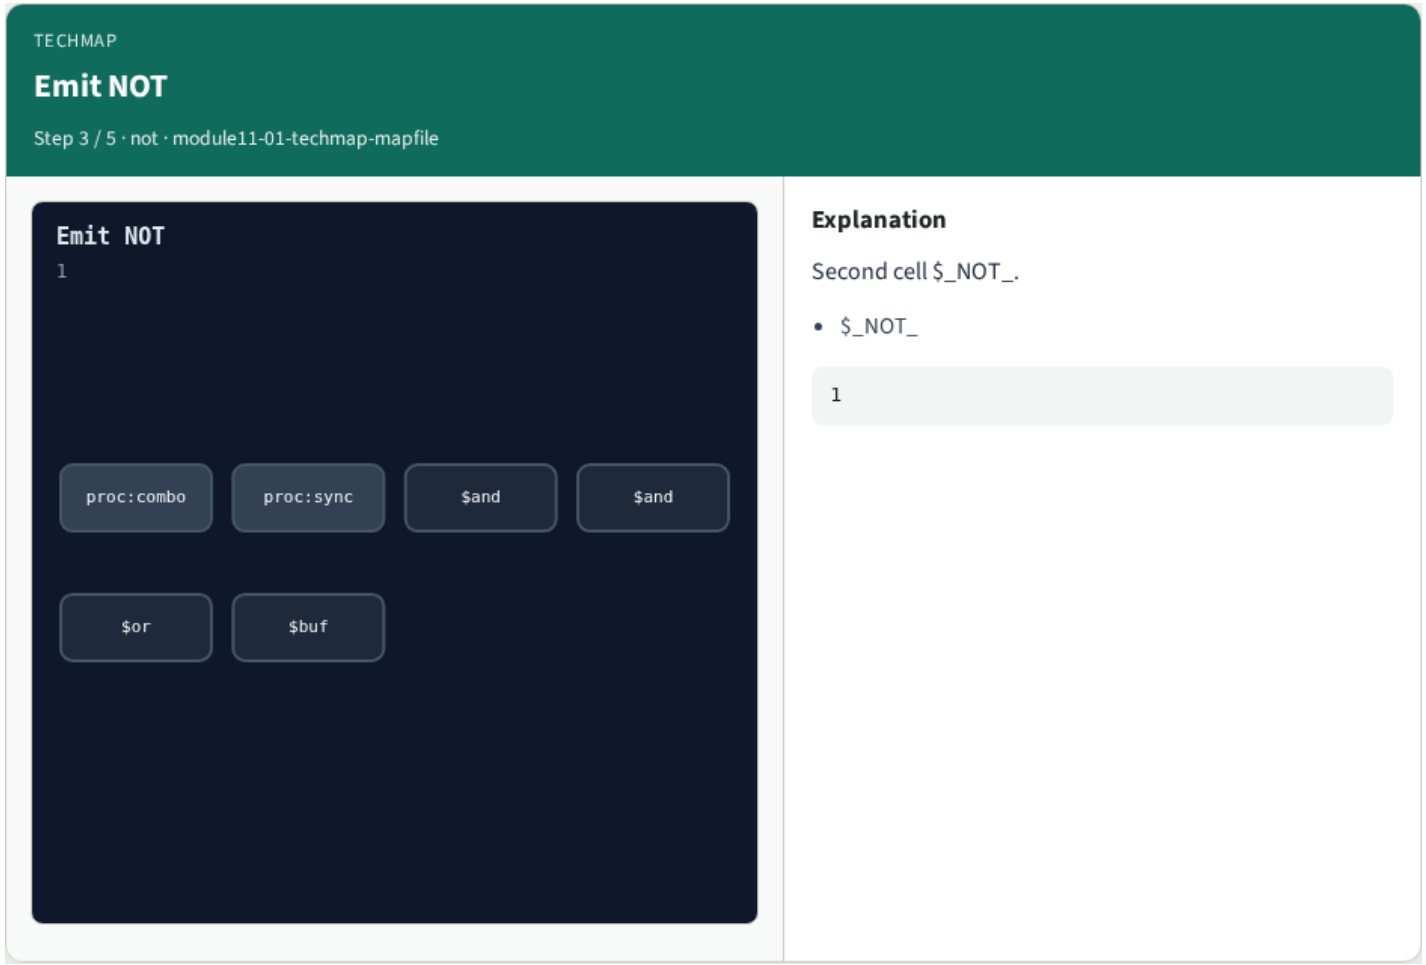


Emit NOT

Count 2

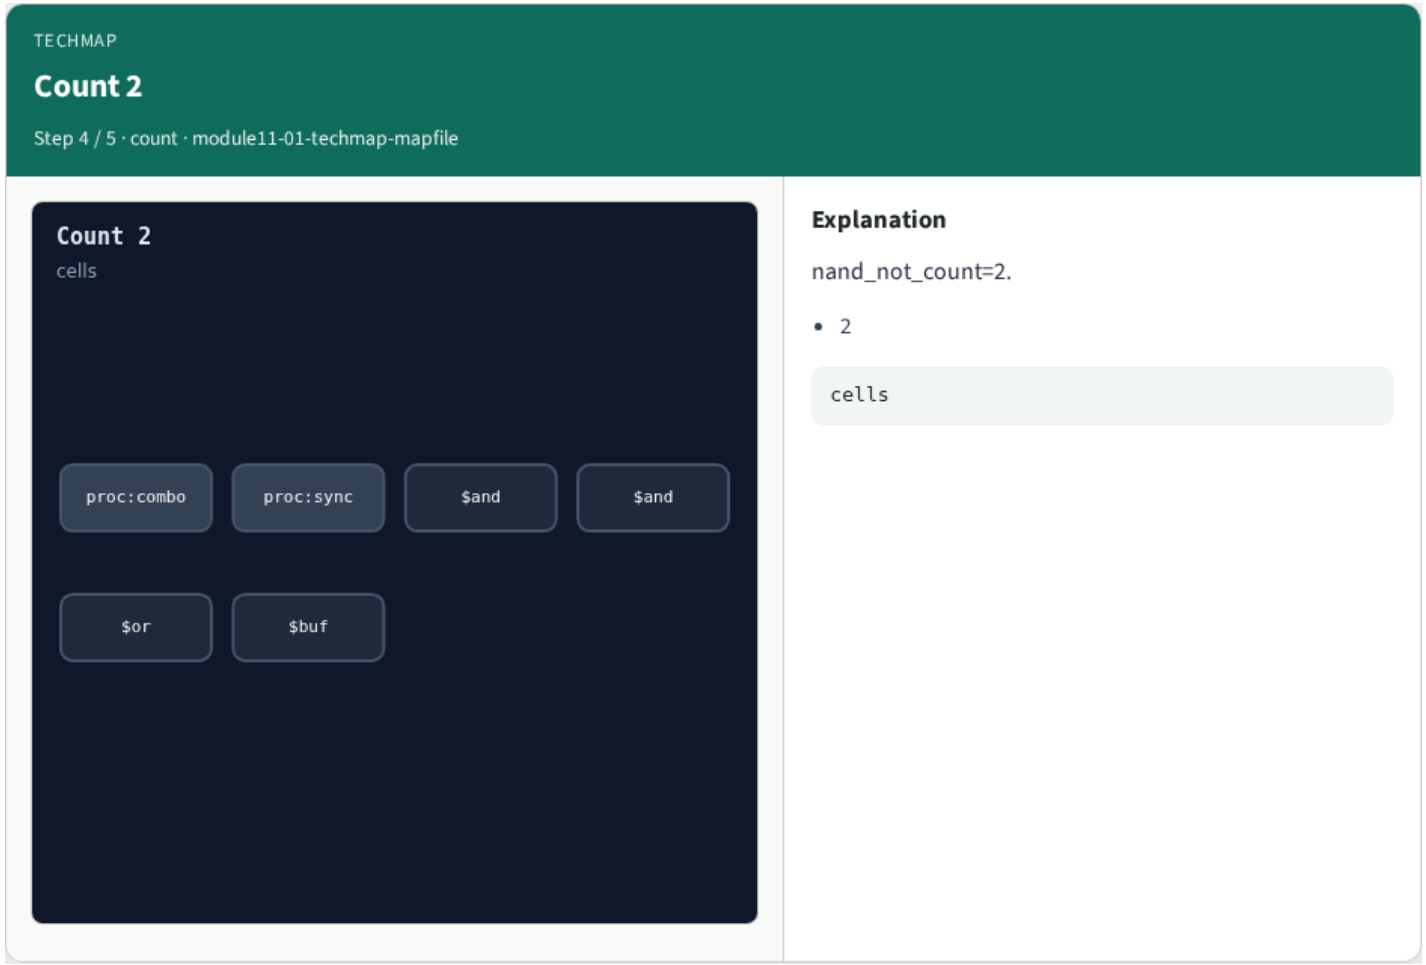

Count 2

Golden

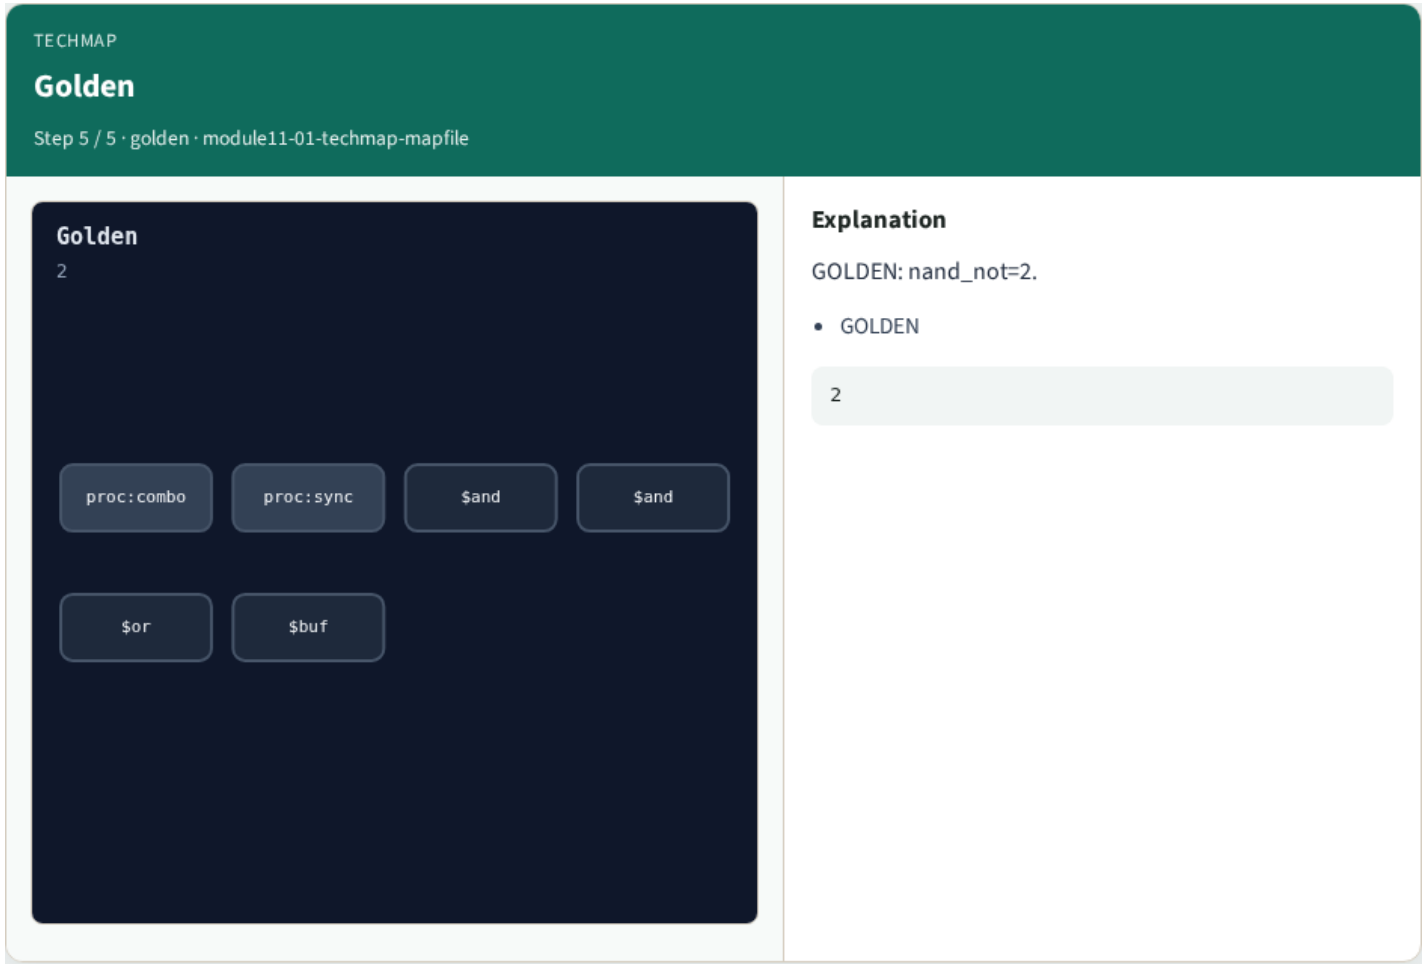

Golden

Browser lab track

- Open **techmap-mapfile**
- Apply the map rule and Check NAND/NOT count

Implement track

- Call algo_techmap_mapfile(); assert nand_not_count == 2

Pitfalls

- Mapping every cell type at once
- Counting NAND without the following NOT

Try these

- From the common folder

Try these — try these

```
cd courses/learn_yosys/common
python3 algo_solvers.py
```

Pseudocode

- Here is the check in plain steps

Pseudocode — try these

```
after opt_merge
match dollar and → emit $_NAND_ then $_NOT_
ok if nand_not_count == 2
```

Next

- Complete the quiz for this part
- Next: extract ANDOR2 subcircuit