Decomp literacy

Production flows may use greedy heuristics or exact backtrack , know when they differ

The idea

- On tiny_mp both methods succeed; colors_used=3 for greedy and backtrack


Greedy

TRIPLE DECOMP

Greedy

Step 1 / 5 · g · module03-03-triple-decomp

g used=3

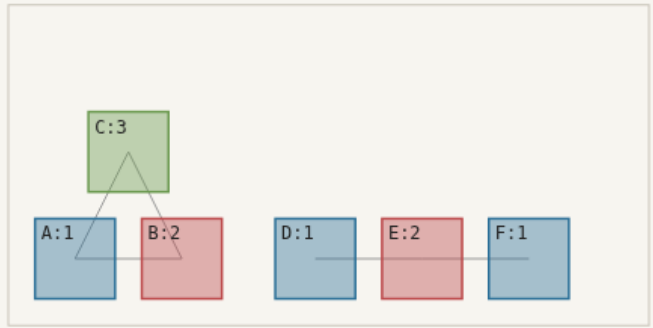

Explanation


Greedy 3-color in id order.

- greedy

```
fast
```


Greedy

Backtrack

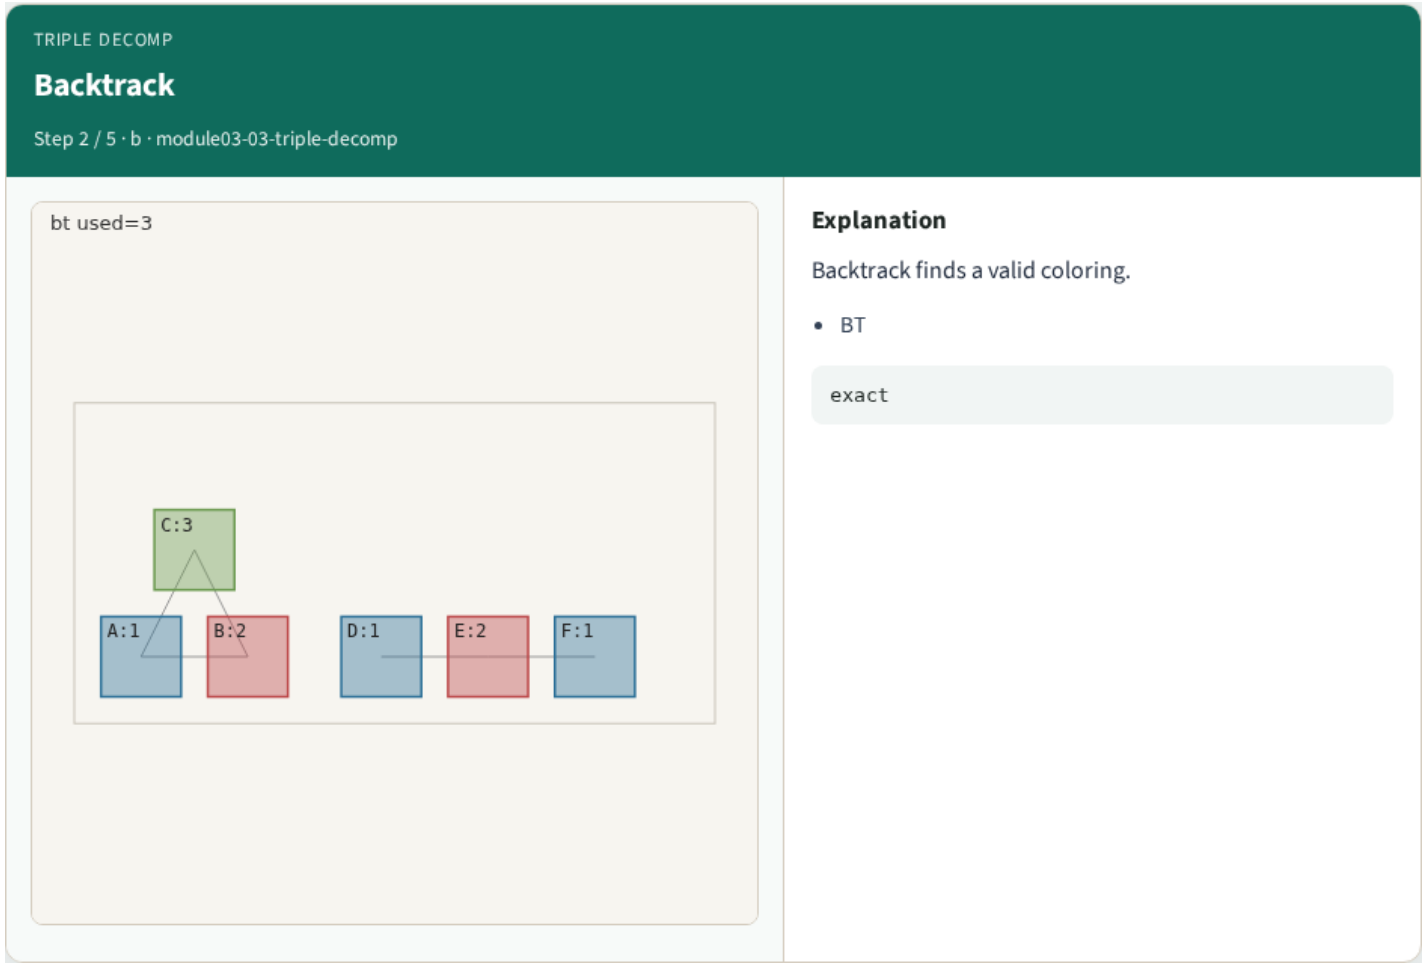


Backtrack

Same used

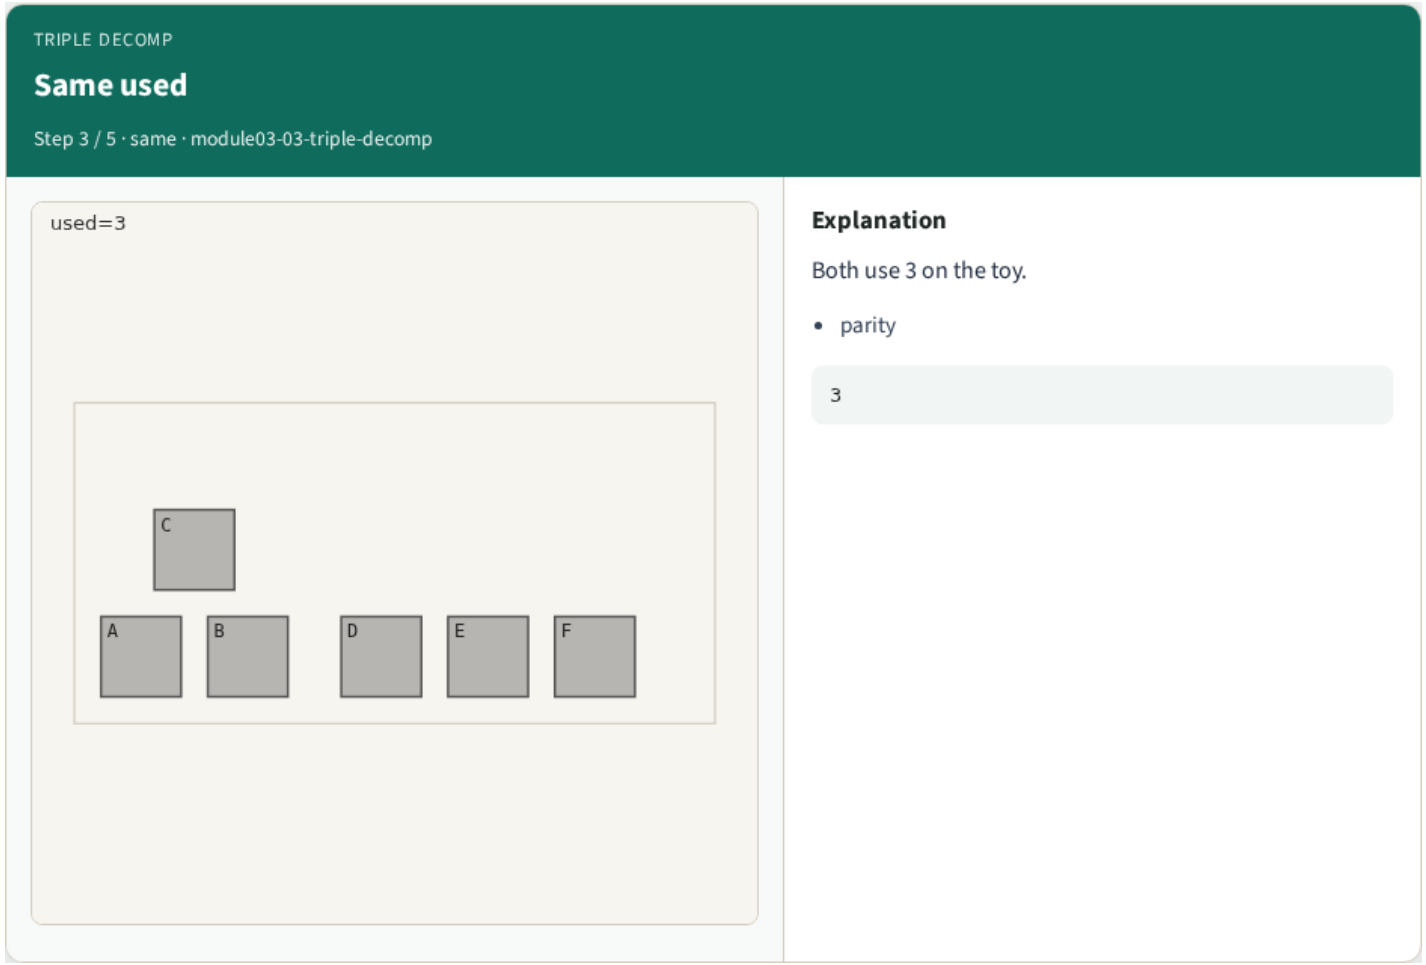


Same used

Methods

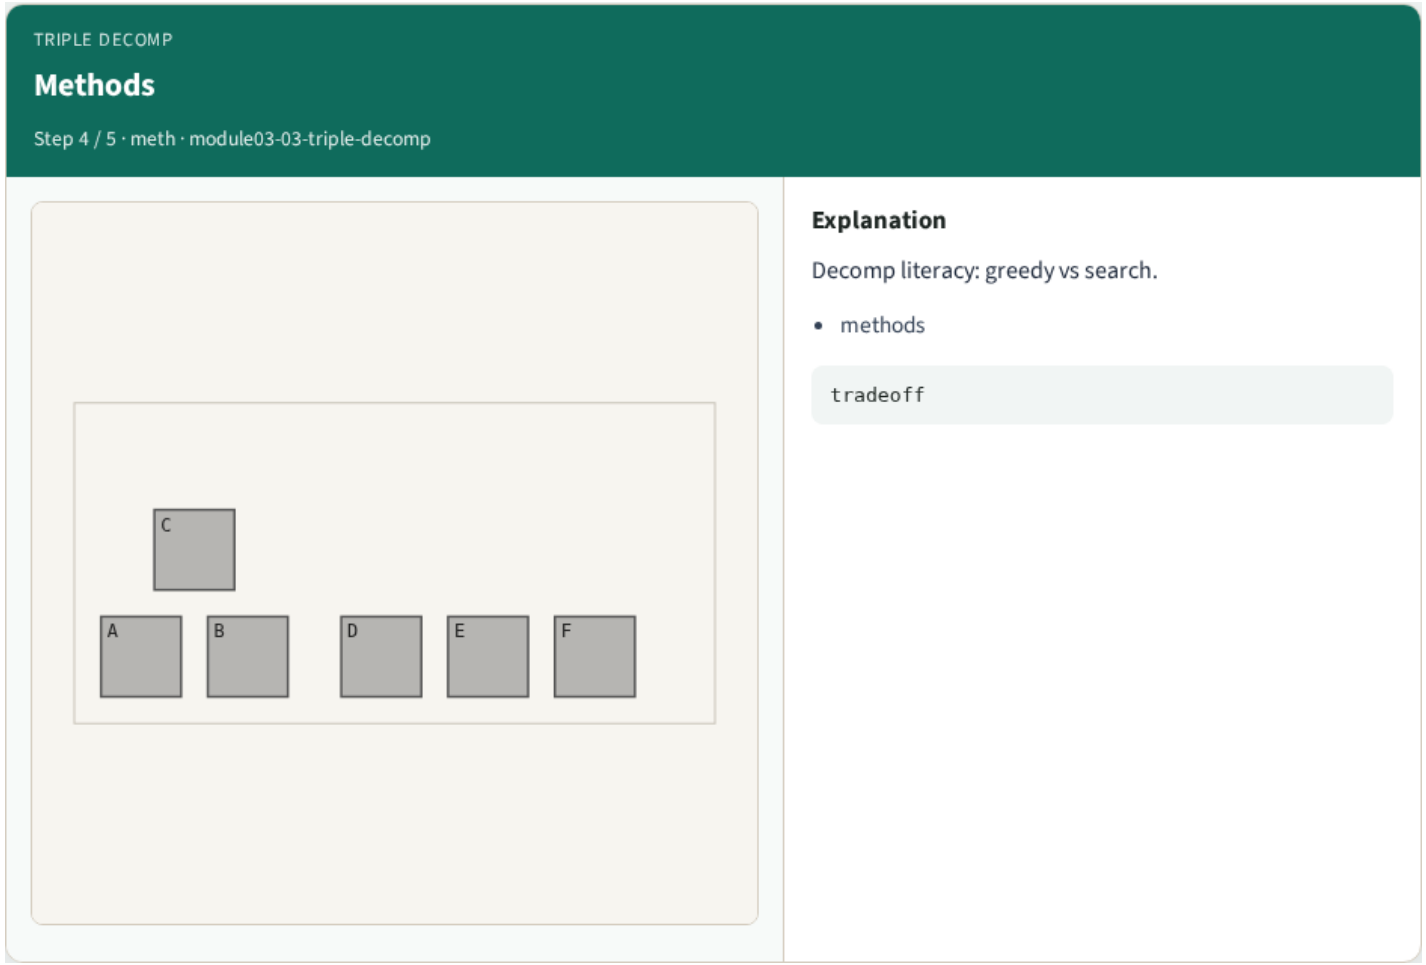


Methods

Choose

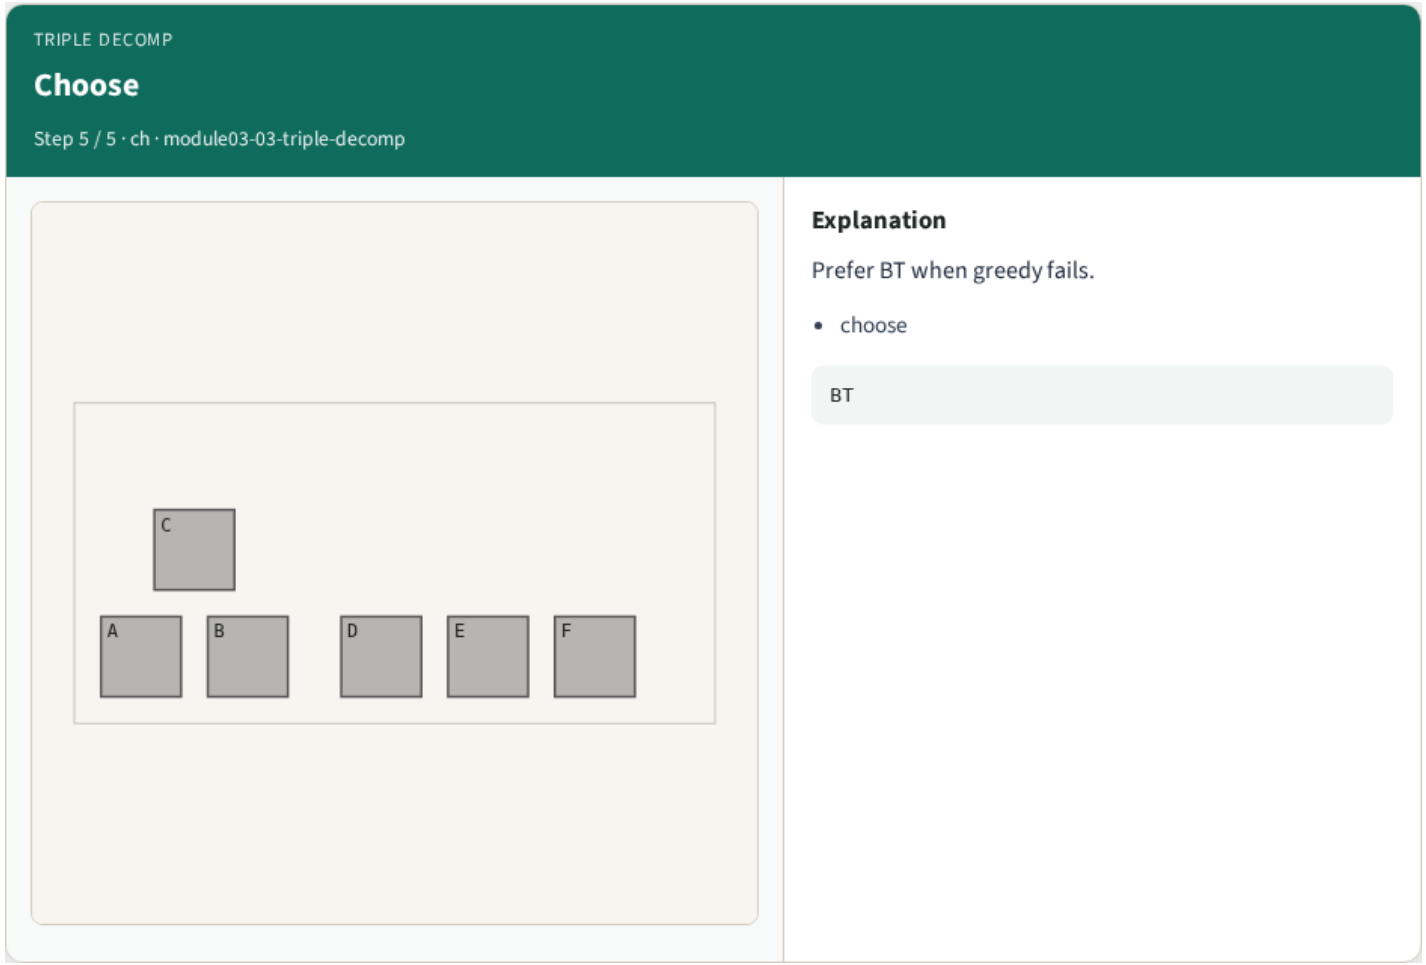

Choose

Browser lab track

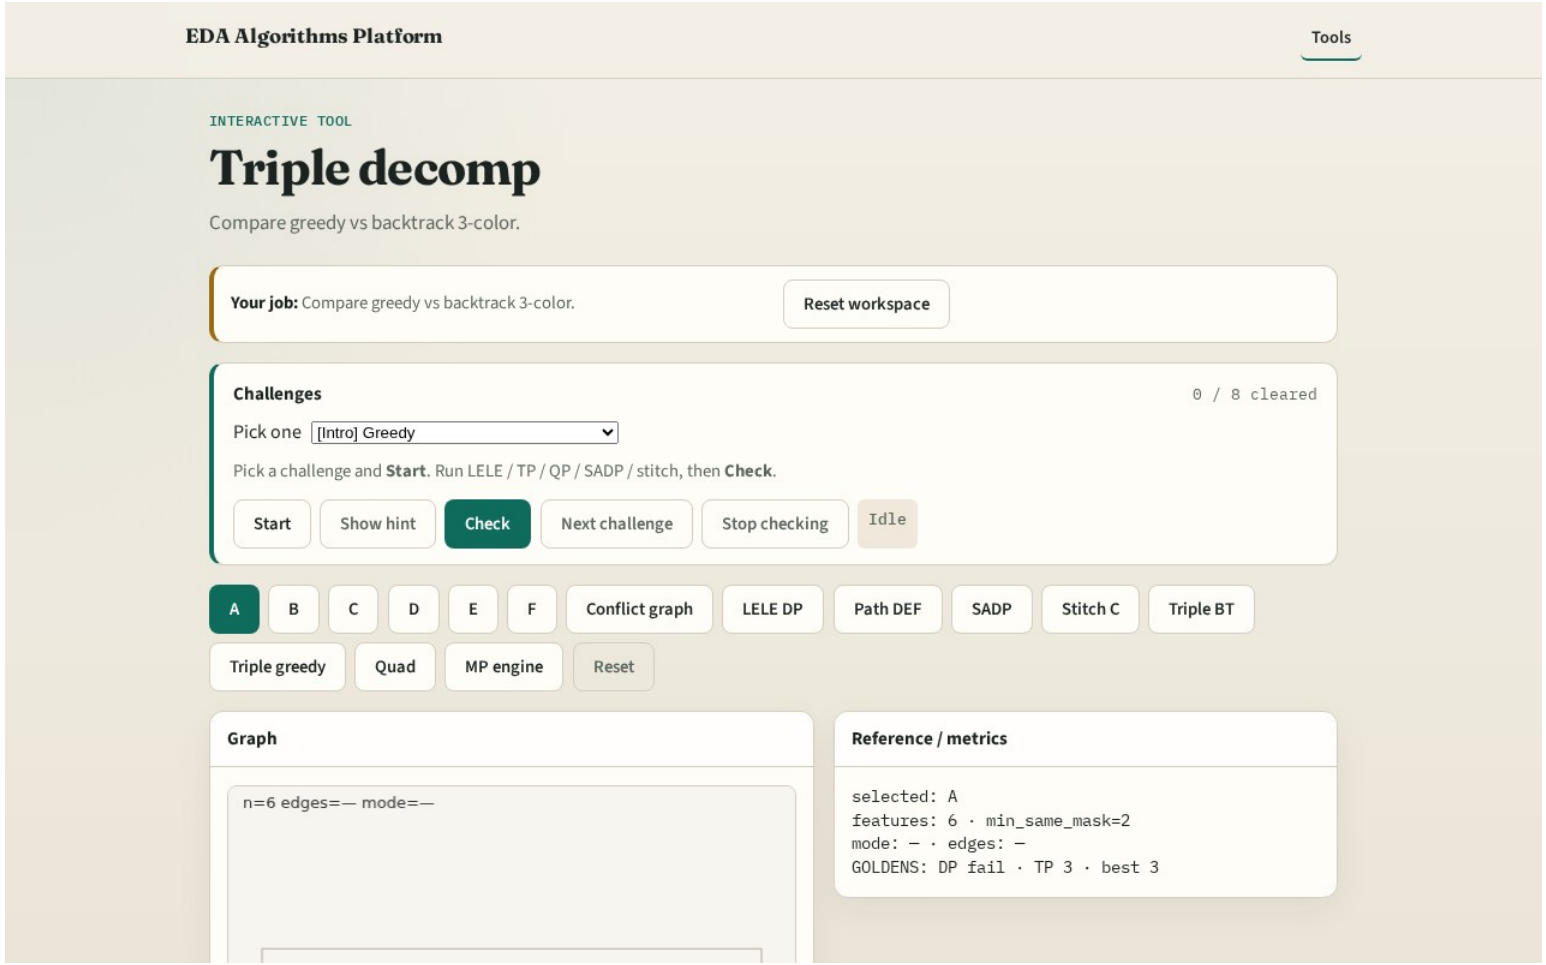

Browser lab starter

Implement track

- Compare color_greedy(G,3) vs color_backtrack(G,3); assert both ok

Pitfalls

- Assuming greedy always equals backtrack
- Ignoring failure cases on larger graphs

Your turn

- Next: quad patterning with headroom